
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M125849	NEW RELEASE	01/05/10	MMG	RD

SUGGESTED MOUNTING CONFIGURATION FOR JZ1436 CASE STYLE, "06SW01" PIN CODE

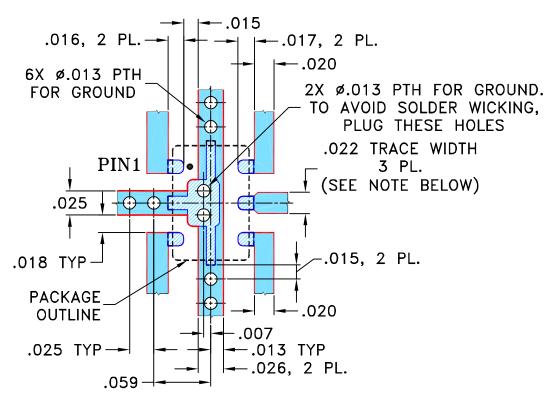

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" \pm .001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE					
DIMENSIONS ARE IN INCHES	DRAWN	MMG	12/23/09					
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	AV	01/04/10					
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	RD	01/05/10					
FRACTIONS ±								
☐ Mini-Circuits ®								
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI_CIRCUITS								

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, 06SW01, JZ1436, TB-530+

SIZE A	code ident 15542	DRAWING		L-324		REV:
FILE:	98PL324	SCALE:	10:1	SHEET:	1	OF 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95