


REVISIONS											
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH						
OR	M131518	NEW RELEASE	05/12/11	PW	CW						
A	M135045	UPDATED NOTE 2 & REMOVED TABLE	12/30/11	AV	DJ						

## SUGGESTED MOUNTING CONFIGURATION FOR MC1631 CASE STYLE, "08AM07" PIN CODE

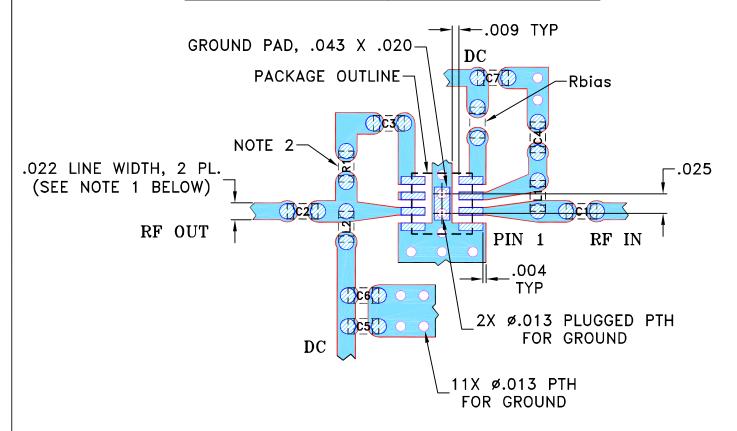

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - 2. 0402 SIZE CHIP FOOT PRINTS SHOWN FOR REFERENCE, FOR COMPONENT VALUE REFER TO TB-615+.
  - 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER) DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED **INITIALS** DATE 04/19/11 DIMENSIONS ARE IN INCHES PW DRAWN TOLERANCES ON: 05/12/11 AV CHECKED 2 PL DECIMALS ± 3 PL DECIMALS  $\pm$ .005 **APPROVED** 05/12/11 ANGLES ± FRACTIONS ±

PL, 08AM07, MC1631, TB-615+

SIZE	CODE IDENT	DRAWING		DI 94	4	REV:		_
A	15542		90-	-PL-34	4		A	
FILE: 98PL344		SCALE:	8:1	SHEET:	1	OF	1	

Mini-Circuits ®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95