




THIRD ANGLE PROJECTION	
	

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M132023	NEW RELEASE	MAY 11	MD	KG

SUGGESTED MOUNTING CONFIGURATION FOR
HU1186 CASE STYLE "14FL05" PIN CODE

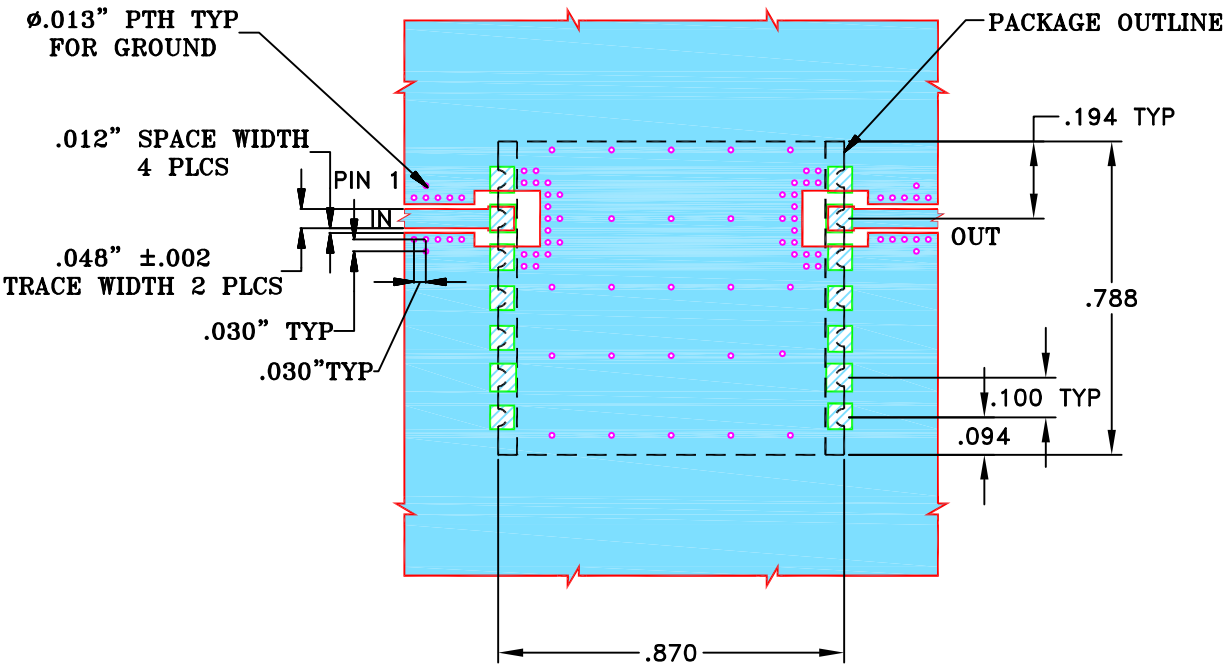

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030"±.003". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED		INITIALS		DATE	
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005" ANGLES ± FRACTIONS ±	DRAWN	MD		24 MAY 11	
	CHECKED	MD		24 MAY 11	
	APPROVED	AKR		24 MAY 11	
 Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235					
PL, 14FL05, HU1186, BSF-C, TB-378S+, 50Ω					
SIZE A		CODE IDENT 15542		DRAWING NO: 98-PL-347	
FILE: 98PL347		SCALE: 2:1		REV: OR	
ASHEETA1.DWG REV:A DATE:01/12/95		SHEET: 1 OF 1			