
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M136022	NEW RELEASE	03/07/12	GF	ABD

SUGGESTED MOUNTING CONFIGURATION FOR FV1206-4 CASE STYLE, "04FL01" PIN CODE



- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

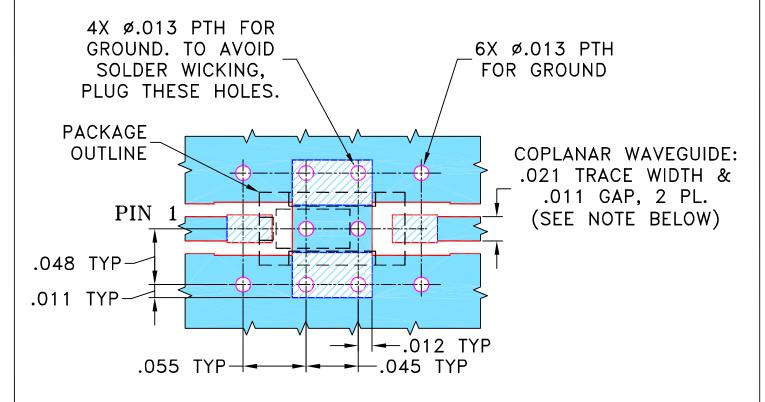

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE		¬ > r · ·		. •	• 4 R			
DIMENSIONS ARE IN INCHES	DRAWN	GF	02/17/12		⊥Mını	l – (ircu	1ts	13 Neptu	ne Aven	ue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	IL	03/07/12	Mini-Circuits® 13 Neptune Avenu Brooklyn NY 1123							
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	ABD	03/07/12								
FRACTIONS ±				ceil PL	, 04FL0)1. J	FV1206	-4.	TB-	618	+
III Mini−Circuits ®							,				
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY										I	
					CODE IDENT	DRAWING				REV:	
DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE				A	15542		98.	-PL-:	363	(OR
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					FILE: OODI 262		10.1	SHEET:	4	O.E.	4
ASHEETA1.DWG REV:A DATE:01/12/95] 9	8PL363	SCALE: 12:1		0.1661.	1	OF	Ţ