
THIRD ANGLE PRO	JECTION
+	

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M136376	NEW RELEASE	06/12/12	PW	DJ

SUGGESTED MOUNTING CONFIGURATION FOR DL1721 CASE STYLE, "08AM09" PIN CONNECTION

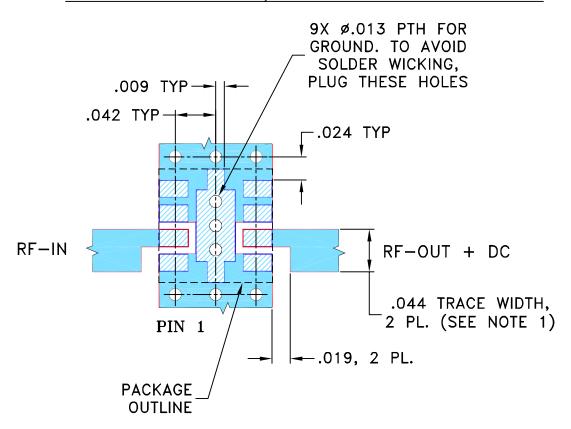

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" \pm .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE	」				. 4 (R)		
DIMENSIONS ARE IN INCHES	DRAWN	PW	05/18/12		\sqcup Mini	ı—(ircu	1ts	13 Neptu	ne Avenue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	IL	06/05/12		Mini-Circuits Brooklyn NY 1					NI IIzoo
3 PL DECIMALS ± .005 ANGLES ± 1°	APPROVED	DJ	06/12/12							
FRACTIONS ±] PL	08AM0	9. D	L1721.	I, CMA TB-656+		
☐ Mini−Circuits ®										
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			SIZE A	code ident 15542	DRAWING NO: 98-PL-366		REV: OR			
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					98PL366	SCALE:	10:1	SHEET:	1	OF 1