
## THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M138739	NEW RELEASE	12/21/12	AV	JC

## SUGGESTED MOUNTING CONFIGURATION FOR TT1491-2 CASE STYLE, "06SP13" PIN CODE

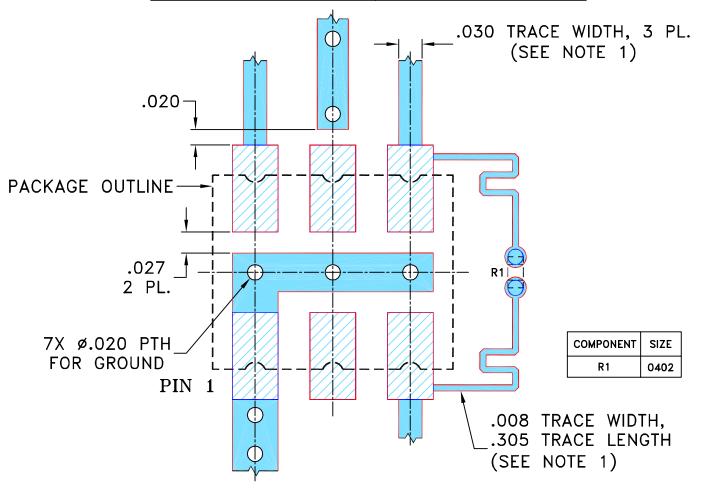

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030"  $\pm$  0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - CHIP COMPONENT FOOT PRINT SHOWN FOR REFERENCE.
     FOR COMPONENT VALUES REFER TO TB-698+.
     BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
  - 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

    DENOTES PCB COPPER LAYOUT WITH SMOBC

    (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS					1	• 4 ®			
DIMENSIONS ARE IN INCHES	DRAWN	AV	12/06/12		Mini-Circuits® 13 Neptune Ave					ne Ave	nue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	12/21/12	Brooklyn N1 11235						200	
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	JC	12/21/12	1							
FRACTIONS ±				PL, 06SP13, 75, TT1491-2, TB-698						8+	
☐ Mini-Circuits ®								·-,			
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI—CIRCUITS.  EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE  AND THE UNITED STATES GOVERNMENT, MINI—CIRCUITS RESERVES ALL PROPRIETARY					CODE IDENT	DRAWING N	10:			REV:	
DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.				A	15542	98-PL-385				OR	
				FILE:	98PL385	SCALE:	8:1	SHEET:	1	OF	1
ASHEETA1.DWG REV:A DATE:01/12/95					aor rooo		0.1		T	OI.	T