



THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M148377	NEW RELEASE	12/30/14	ITG	DJ

**SUGGESTED MOUNTING CONFIGURATION FOR
BL301-1 CASE STYLE "24BT01" PIN CODE**

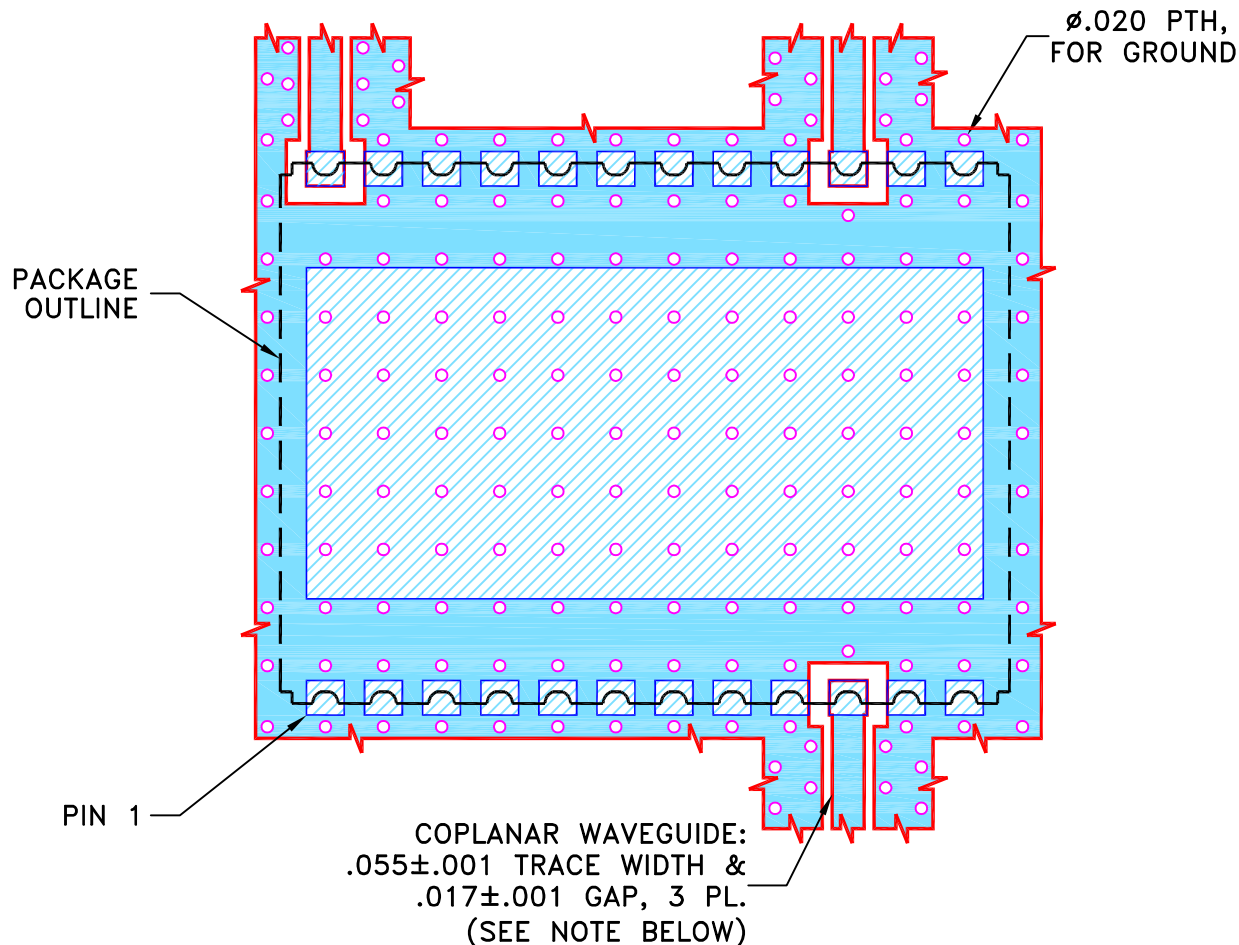

NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.030 \pm .002$ "; COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS COPLANAR WAVEGUIDE PARAMETERS MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

ITG

12/17/14

TOLERANCES ON:

CHECKED

GF

12/30/14

2 PL DECIMALS $\pm$

APPROVED

DJ

12/30/14

3 PL DECIMALS $\pm$.005"ANGLES $\pm$ FRACTIONS $\pm$
 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 24BT01, BL301-1, TB-605+

SIZE
ACODE IDENT
15542DRAWING NO:
98-PL-437REV:
OR

FILE: 98PL437

SCALE: 3:1

SHEET: 1 OF 1