


		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M152909	NEW RELEASE	11/09/15	11/09/15 ITG	

SUGGESTED MOUNTING CONFIGURATION FOR MT1817 CASE STYLE, "14SW04" PIN CODE

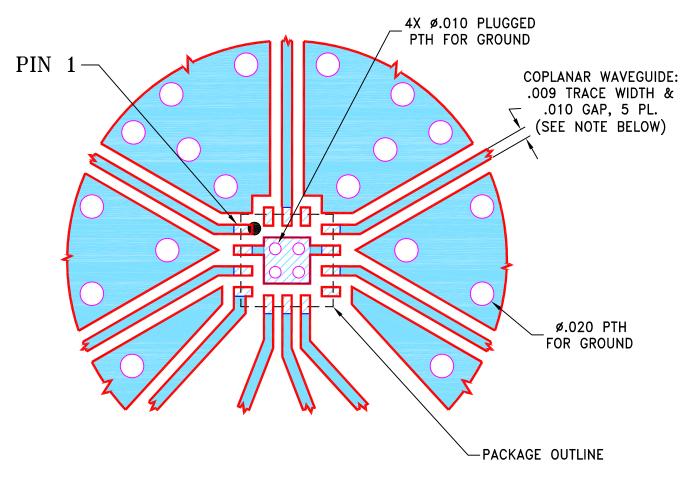

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"±.001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE		¬ ъ « ·	. ~		• 4 (R)			
DIMENSIONS ARE IN INCHES	DRAWN	ITG	11/09/15		\perp Mini	$\mathbf{I} - \mathbf{C}$	ırcu	${ m lts}$:	3 Neptu	ne Aver	iue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	11/09/15		Mini-Circuits Brooklyn NY 112					,00	
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	ZL	11/09/15								
FRACTIONS ±] PL,	14SW04,	75,	MT181	7. TB-	-722	-4-	-F+
Mini−Circuits ®					,	,		,			
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95				SIZE A	CODE IDENT	DRAWING		-PL-4	59	REV:	OR
				FILE:	98PL459	SCALE:	12:1	SHEET:	1	OF	1
				90LT499		12.1			T	Or	T