
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M152910	NEW RELEASE	11/09/15	ITG	ZL

SUGGESTED MOUNTING CONFIGURATION FOR MT1817 CASE STYLE, "14SW03" PIN CODE

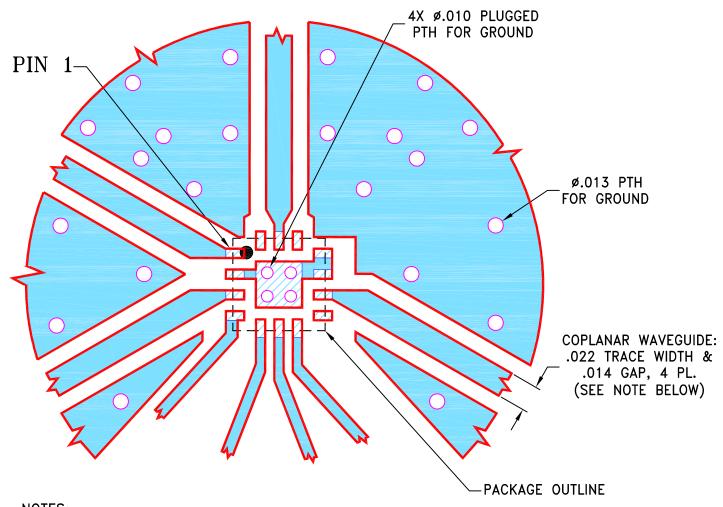

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"±.001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE									
DIMENSIONS ARE IN INCHES	DRAWN	ITG	11/09/15		\sqcup Mini	Circuits® 13 Neptune Avenue Brooklyn NY 11235				nue		
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	11/09/15		Brooklyn NY 1123					<u> </u>		
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	ZL	11/09/15									
FRACTIONS ±] PL.	14SW0	03. M	T181'	7. TB-	-72	24-	3+	
∭ Mini−Circuits ®						,		,				
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES COVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			SIZE A	code ident 15542	DRAWING N		-PL-46	1	REV:	OR		
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					98PL461	SCALE:	12:1	SHEET:	1	OF	1	
1101121111112110 11211111 211121017 12700				1				1				