
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M156313	NEW RELEASE	05/09/16	GF	RS

SUGGESTED MOUNTING CONFIGURATION FOR DF782 CASE STYLE, "O4AMO3" PIN CODE

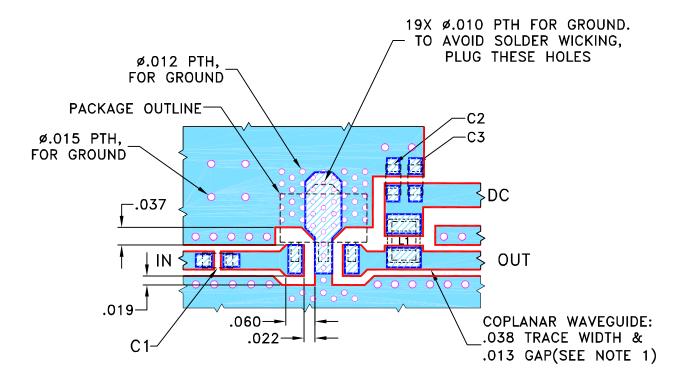

COMPONENT	SIZE			
C1-C3	0603			
L1	0805			

NOTES:

- 1. TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020"±.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE			•	• 4 ®				
DIMENSIONS ARE IN INCHES	DRAWN	GF	05/09/16	🖅 📖 Mini-Circuits 🖫			13 Neptune Avenue Brooklyn NY 11235				
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	IL	05/09/16		Π				rookiyn	N1 11.	
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	RS	05/09/16								
FRACTIONS ±				floor $ m PL$. 04AM	03.	DF78	2. TI	B-8	69	\mathbf{A} +
∭Mini−Circuits ®					,	,		-,			
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE				SIZE	CODE IDENT	DRAWING	NO:			REV:	
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			A	15542			PL-48	36		OR	
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95				FILE:	98PL486	SCALE:	5:1	SHEET:	1	OF	1
					001 2100		· · ·			<u> </u>	-