


REVISIONS					
REV OR	ECN No.	DESCRIPTION	DATE	DR	AUTH
	M163991	NEW RELEASE	10/03/17	CA	JLM

**SUGGESTED MOUNTING CONFIGURATION FOR
FOR FV1206-4 CASE STYLE, "04FL01" PIN CONNECTION**

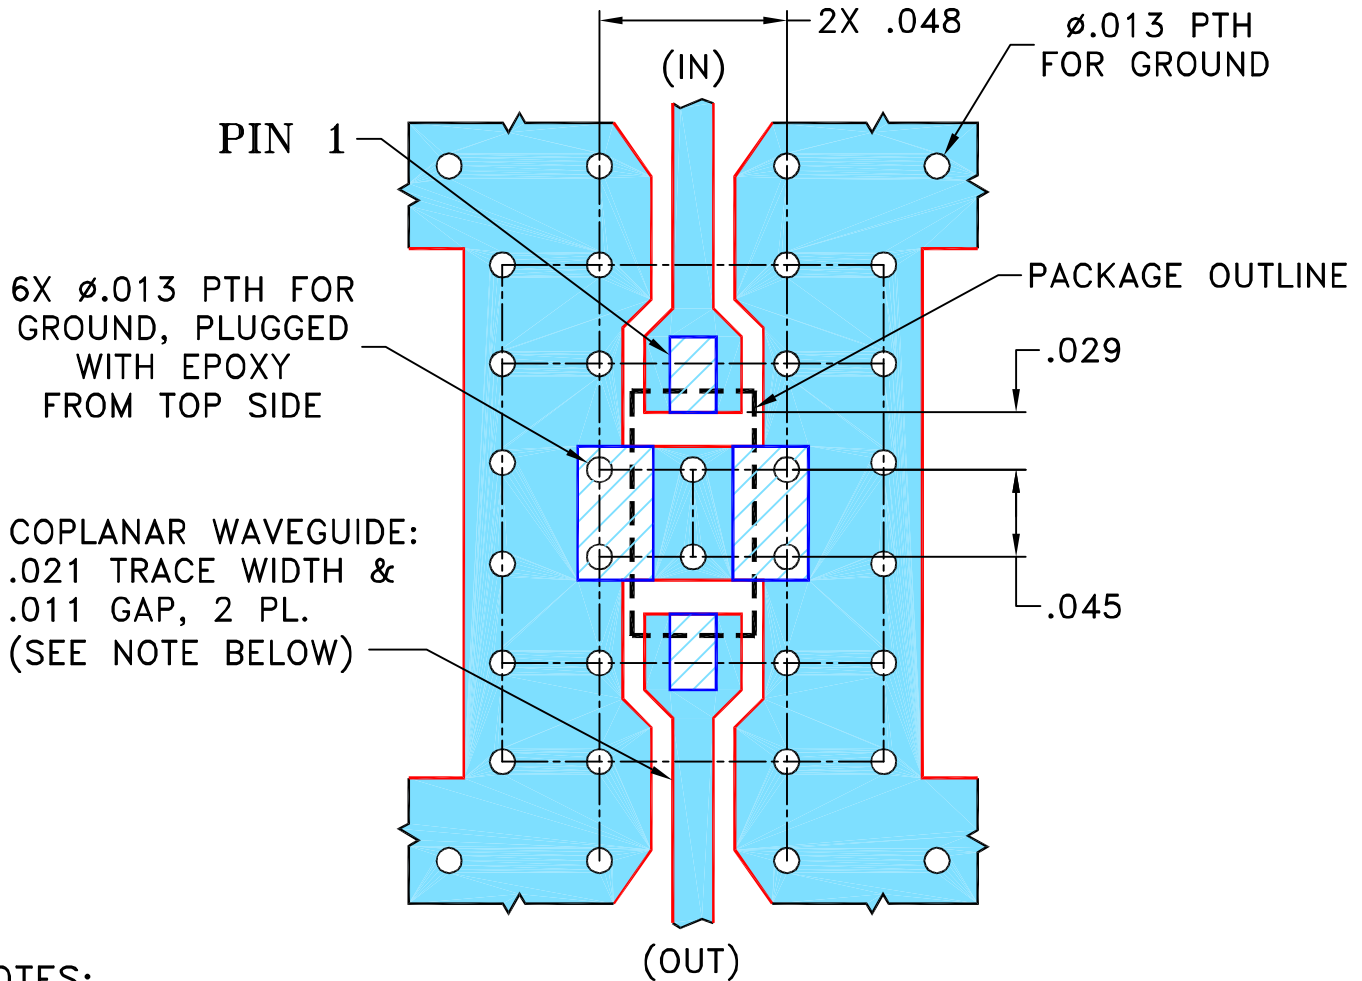

NOTES:

1. TRACE WIDTH & GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" $\pm$.001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005 ANGLES $\pm$ FRACTIONS $\pm$	DRAWN	CA	09/27/17
	CHECKED	GF	10/03/17
	APPROVED	JLM	10/03/17



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 04FL01, FV1206-4, TB-637+

Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.			
ASHEETA1.DWG	REV:A	DATE:01/12/95	

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-530	OR
FILE:	98PL530	SCALE:	10:1
SHEET:	1	OF	1