


		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M164442	NEW RELEASE	12/14/17	ITG	TN

## SUGGESTED MOUNTING CONFIGURATION FOR CK2335 CASE STYLE "16TD01" PIN CODE

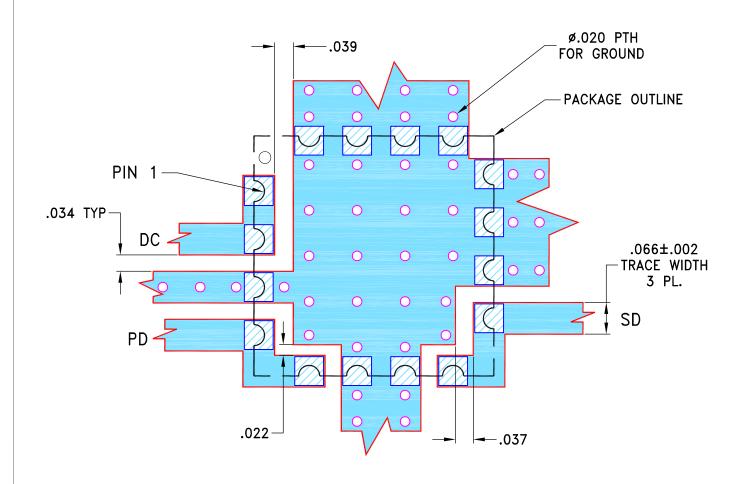

## NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B, WITH DIELECTRIC THICKNESS .030"±.002". COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE			• •		• 4 ®			
DIMENSIONS ARE IN INCHES	DRAWN	ITG	12/14/17		⊥ Mını	ı—(	ircu	its :	3 Neptu	ne Avenue	<b>)</b>
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	12/14/17	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235  PL, 16TD01, CK2335, TB-930+							
3 PL DECIMALS ± .005"	APPROVED	TN	12/14/17								
FRACTIONS ±				] PL, 101D01, CK2333, 1B-93							•
Mini-Circuits ®  THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE											
					CODE IDENT	DRAWING	NO:			REV:	
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE				SIZE	15542	98-PL-533			OR		
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					98PL533	SCALE:	<u>5:1</u>	SHEET:	1	OF 1	
ASHEETA1.DWG REV:A DATE:01/12/95				<u> </u>	OOI HOOO					<u> </u>	