


		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M169330	NEW RELEASE	08/08/18	GF	BK



NOTES:

- 1. TRACE WIDTH IS SHOWN FOR FR4 (IT-180A) WITH DIELECTRIC THICKNESS .010±.001. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- 3. UNIT LAND PATTERN WAS ADJUSTED FOR HIGH FREQUENCY PERFORMANCE AND DIFFERENT FROM SUGESTED LAYOUT AS PER JV1210C-2.

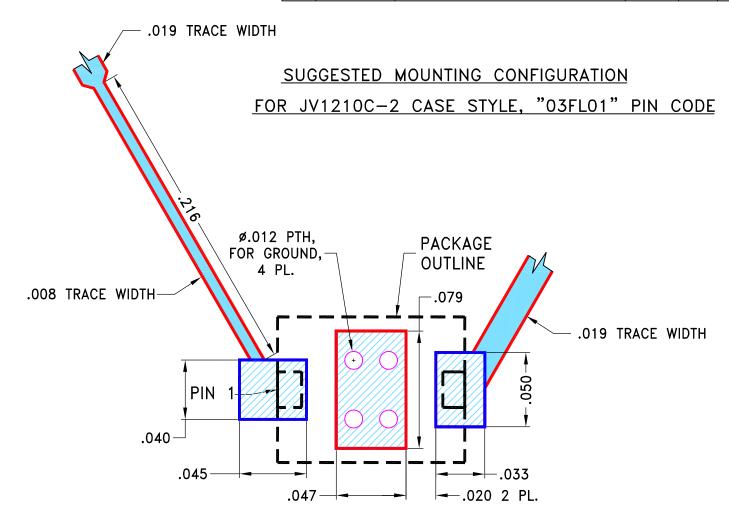

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE			. ~:		• 4 ®			
DIMENSIONS ARE IN INCHES	DRAWN	GF	08/02/18		Min	ı – Cı	rcu	1ts	13 Neptu	ne Ave	aue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	IL	08/07/18		T				Brooklyn	NY 117	235
3 PL DECIMALS ± .005	APPROVED	BK	08/08/18	1							
FRACTIONS ±				PL, 03FL01, JV1210C-2, TB-980+						_	
☐ Mini−Circuits ®					,	,		,			
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE				SIZE A	code ident	DRAWING N		-PL-	542	REV:	OR
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					98PL542	SCALE: 1	15:1	SHEET:	1	ΛF	1
					7UF LJ4&	1	IOI	1	1	Or	T