
THIRD ANGLE PROJECTION ------

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M166277	NEW RELEASE	02/20/18	ITG	BK

SUGGESTED MOUNTING CONFIGURATION FOR FV1206-4 CASE STYLE, "04FL01" PIN CODE

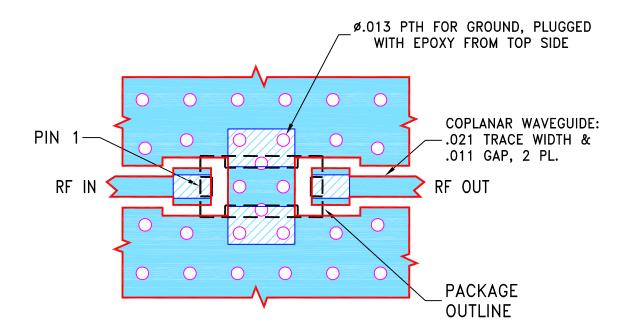

NOTES:

- 1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010±.001. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE	Mini-Circuits® 13 Neptu							
DIMENSIONS ARE IN INCHES	DRAWN	ITG	02/12/18		- Mını	ı–Cır	cu	its	13 Neptu	ne Aver	ue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	02/20/18	Brooklyn NI 11233							333
3 PL DECIMALS ± .005	APPROVED	BK	02/20/18								
FRACTIONS ±				PL, 04FL01, FV1206-4, TB-810+							
☐ Mini−Circuits ®],						
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE					code ident 15542	DRAWING NO:	98-	-PL-5	546	REV:	or
PARTY, IN WHOLE OR IN PART, WITHOU	FILE:	98PL546	SCALE: 1	0:1	SHEET:	1	OF	1			