
## THIRD ANGLE PROJECTION ------

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M168200	NEW RELEASE	05/31/18	NP	SL

## SUGGESTED MOUNTING CONFIGURATION FOR JC0603C CASE STYLE, "06FL12" PIN CODE

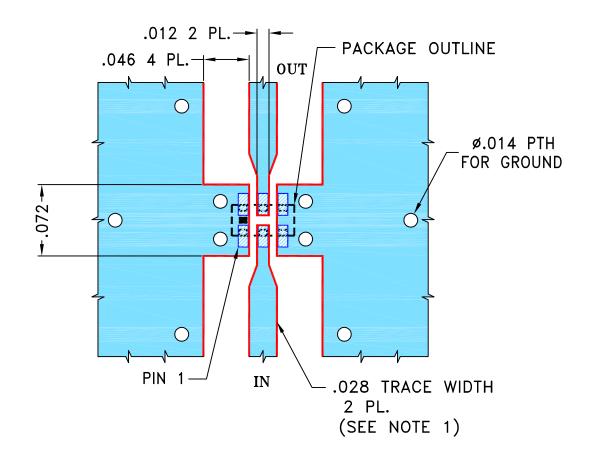

## **NOTES:**

- 1. TRACE WIDTH IS SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC THICKNESS .016±.0015. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE			· ~:		• 4 (R	)	
DIMENSIONS ARE IN INCHES	DRAWN	NP	05/30/18	Mini-Circuits® 13 Neptune Aver				ne Avenue		
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	05/30/18	Brooklyn N					N1 11235	
3 PL DECIMALS ± .005	APPROVED	SL	05/31/18							
FRACTIONS ±				] PI	., 06FL1	2. J(	0603	3C. '	TB-1	020+
☐ Mini-Circuits ®					.,	,		,		
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.  EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			SIZE A	CODE IDENT	DRAWING N		-PL-	554	REV: OR	
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					98PL554	SCALE:	10:1	SHEET:	1	OF 1