


THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M166659	NEW RELEASE	04/18	DK	YB
OR	R93136	NEW RELEASE	04/18	DK	YB

SUGGESTED MOUNTING CONFIGURATION

FOR PQ2584 CASE STYLES 04DC01 PIN CONNECTION, 50 OHM

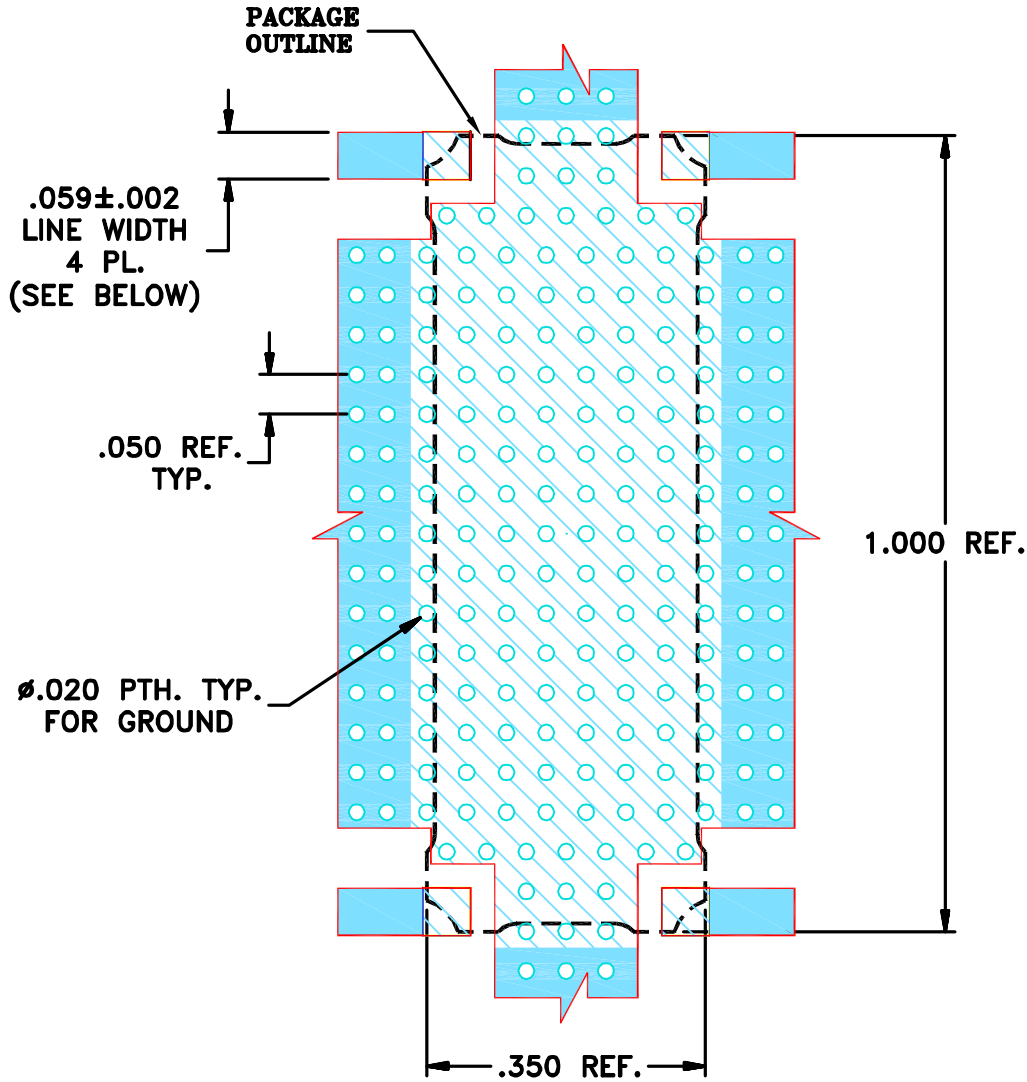

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RT/DUROID 5880 WITH DIELECTRIC THICKNESS. 0.020"±.0015". COPPER: 1 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± 1° FRACTIONS ±	DRAWN	DK (RAYON) 13 APR 18
	CHECKED	RM (RAYON) 13 APR 18
	APPROVED	YB (RAYON) 13 APR 18



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL FOR BDCH PQ2584
TB-1036+ (50 Ω)

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-578	REV: OR
FILE: 98PL578(OR)		SCALE: 4:1	SHEET: 1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDOR AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THEREON. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95