



THIRD ANGLE PROJECTION



REVISIONS


REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M171265	NEW RELEASE	12/05/18	ITG	JG

**SUGGESTED MOUNTING CONFIGURATION
FOR DG1847 CASE STYLE, "24DC04" PIN CODE**

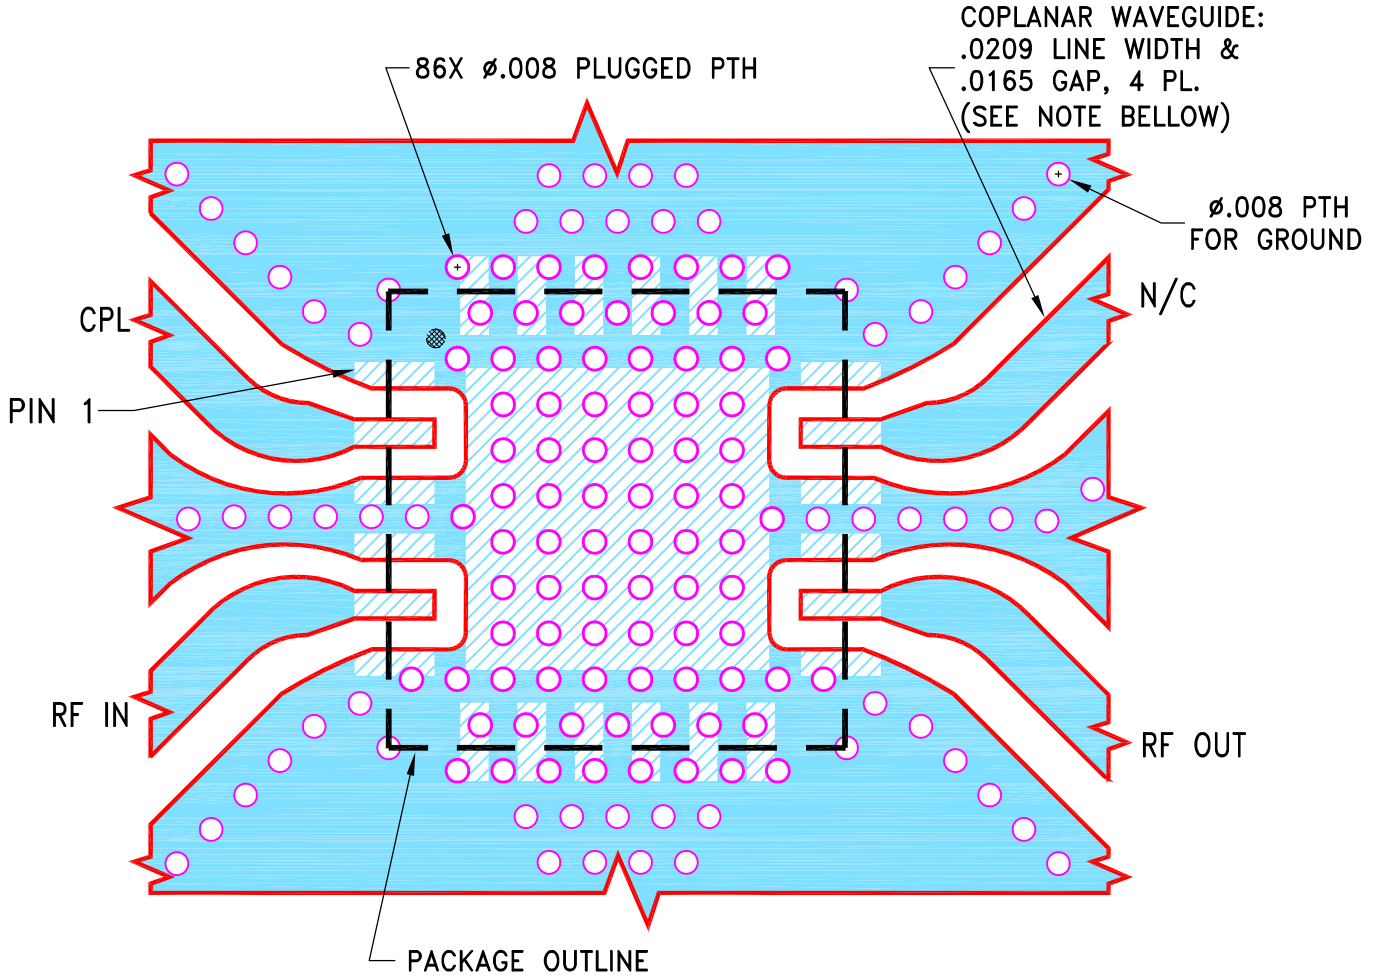

NOTES:

1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"±.001". COPPER: 1 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. UNIT LAND PATTERN WAS OPTIMIZED FOR BETTER PERFORMANCE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).




DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN ITG	11/30/18
TOLERANCES ON:	CHECKED GF	12/05/18
2 PL DECIMALS ±	APPROVED JG	12/05/18
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		


Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, 24DC04, DG1847, TB-EDC10-183+/273+

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-614	REV: OR
FILE: 98PL614	SCALE: 15:1	SHEET: 1 OF 1	


 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.