
## THIRD ANGLE PROJECTION

			REVISIONS			
	REV	ECN No.	DESCRIPTION	DATE	DR	<b>AUTH</b>
	OR	M172675	NEW RELEASE	02/18/19	ITG	WIL. P
- 1						

## SUGGESTED MOUNTING CONFIGURATION FOR TE2769 CASE STYLE, "04AM06" PIN CODE

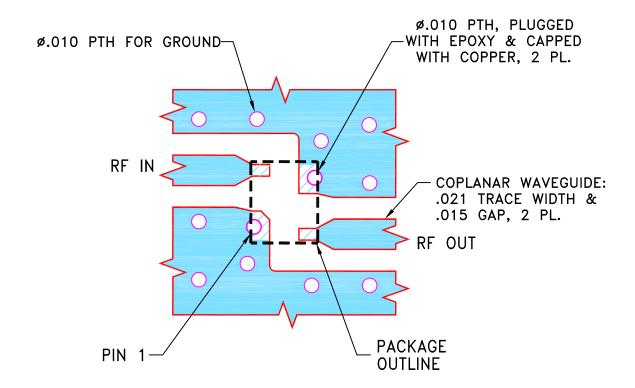

## NOTES:

- 1. TRACE WIDTH & GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"±.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE	l —									
DIMENSIONS ARE IN INCHES	DRAWN	ITG	02/15/19	Mini-Circuits® 13 Neptune Avenu Brooklyn NY 1123						nue			
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	02/18/19							NY 112	235		
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	WILSON P	02/18/19										
FRACTIONS ±				] PL	PL, 04AM06, TE2769, TB-TAV					TAV1	1-331+		
₩ini-Circuits®													
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE				SIZE A		CODE IDENT 15542	DRAWING NO: 98-PL-627				REV:	OR	
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					ΩΩ	98PL627	SCALE:	15:1	SHEET:	1	ΛF	1	
	ASHEETA1.DWG REV:A DATE:01/12/95				90	BOL TOW !	1	19:1		1	Or	1	