
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M175211	NEW RELEASE	07/10/19	ITG	BK

SUGGESTED MOUNTING CONFIGURATION FOR GE0805C-1 CASE STYLE

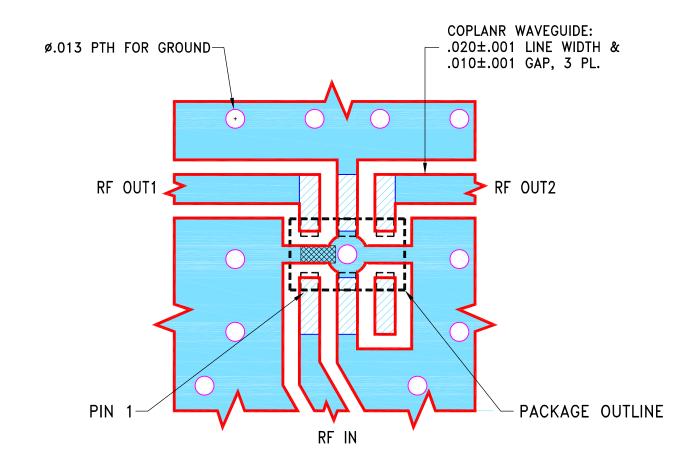

NOTES:

- 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010±.001. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS LINE WIDTH & GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS D		DATE			. ~:		• 4 ®			
DIMENSIONS ARE IN INCHES	DRAWN	ITG	07/08/19]	-1 Mini	ı — Cır	cu	1ts :	3 Neptu	ne Ave	nue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	07/10/19	Mini-Circuits 13 Neptune Avenue Brooklyn NY 11235						235	
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	BK	07/10/19	1							
FRACTIONS ±				PL, GE0805C-1, TB-628+							
Mini-]										
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE. MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEFTAL DWG. REV.A. DATE-01/12/95					code ident	DRAWING NO:	98-	-PL-6	 44	REV:	OR
						SCALE: 1	E . 1	SHEET:	1		1
					98PL644	T	5:1		1	Uľ	1