
THIRD	ANGLE PROJECTION	
\triangle		
)	
	_	

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-003790	NEW RELEASE	08/24/20	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR HU1371 CASE STYLE

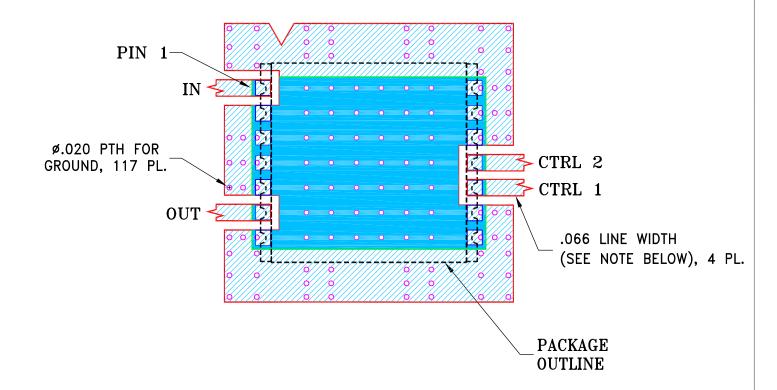

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030±.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE						
DIMENSIONS ARE IN INCHES	DRAWN	ITG	08/24/20	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235					
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	08/24/20						Brookly
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	IL	08/24/20						
FRACTIONS ±				PL, HU1371, TB-1141+					
Mini-Circuits ®]				
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95				SIZE A	code ident 15542	DRAWING NO: 98-PL	-690	REV:	
				FILE: C	8PL690	SCALE: 2.5:1	SHEET: 1	OF 1	