
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-006963	NEW RELEASE	03/19/21	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR CD637 CASE STYLE

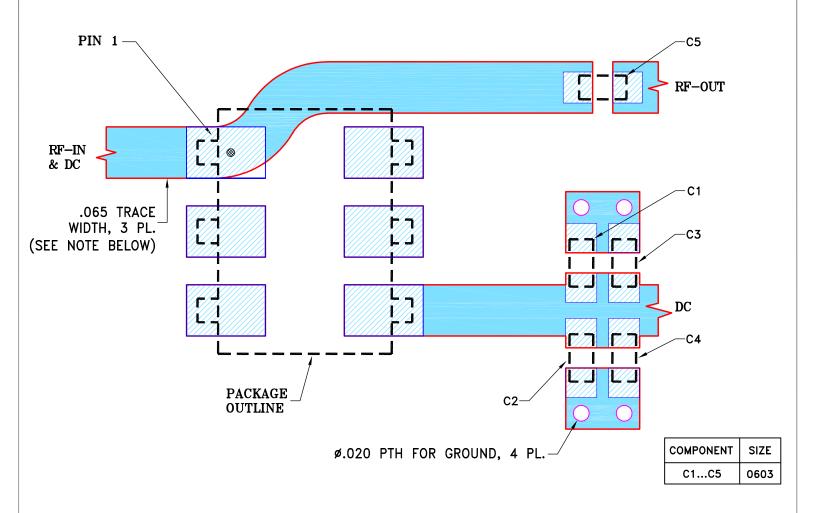

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030±.0015"; COPPER: 1/2 OZ. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-ADCH-1220+.
- 3. UNIT LAND PATTERN WAS OPTIMIZED FOR BETTER PERFORMANCE.
- 4. BOTTOM COPPER OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER) DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE	Τ			
DIMENSIONS ARE IN INCHES	DRAWN	ITG	03/18/21	1			
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	03/18/21	l			
3 PL DECIMALS ± .005	APPROVED	IL	03/19/21	1			
ANGLES ± FRACTIONS ±				1			
Mini−Circuits ®							

 $Mini-Circuits^{^{(\!\!R\!\!)}}$

PL, CD637, TB-ADCH-1220+

CODE IDENT SIZE DRAWING NO: 98-PL-699 OR 15542 Α SCALE: SHEET: 98PL699 OF 8:1 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95