
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-006964	NEW RELEASE	03/19/21	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR CD637 CASE STYLE

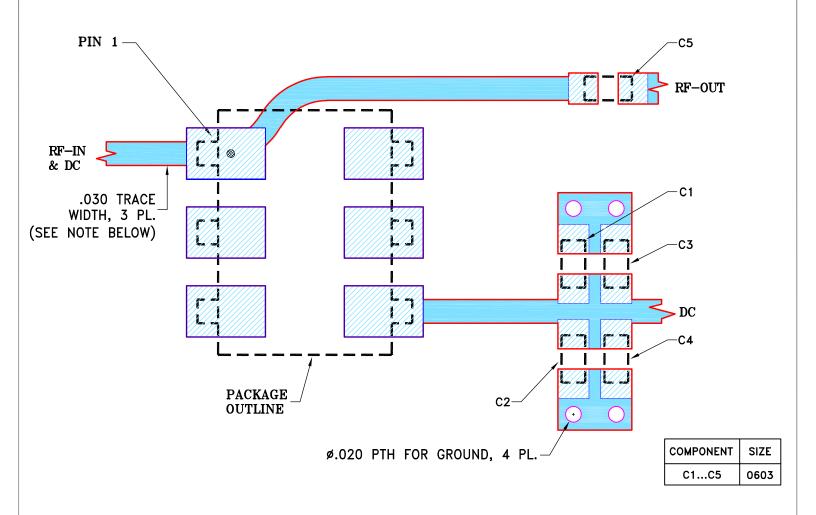

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030±.0015"; COPPER: 1/2 OZ. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-ADCH-1220-75+.
- 3. BOTTOM COPPER OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE	╛┌──		7 3. 6 .	~:		• 4 ®				
DIMENSIONS ARE IN INCHES	DRAWN	ITG	03/18/21	Mini-Circuits® 13 Neptune Aven					ue				
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	03/18/21		Brooklyn NY						NI IIZ	VI 11235	
3 PL DECIMALS ± .005	APPROVED	IL	03/19/21	1									
ANGLES ± FRACTIONS ±] P	PL, CD637, TB-ADCH-1220-75+						+		
☐ Mini−Circuits ®					,	,	.,					-	
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95						code ident 15542	DRAWING NO: 98-PL-700 REV: OI					OR	
					98	3PL700	SCALE:	8:1	SHEET:	1	OF	1	