


THIRD ANGLE PROJECTION


REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-026307	NEW RELEASE	JUL 25	DDR	VC

SUGGESTED MOUNTING CONFIGURATION FOR
RZ2511-1 CASE STYLE

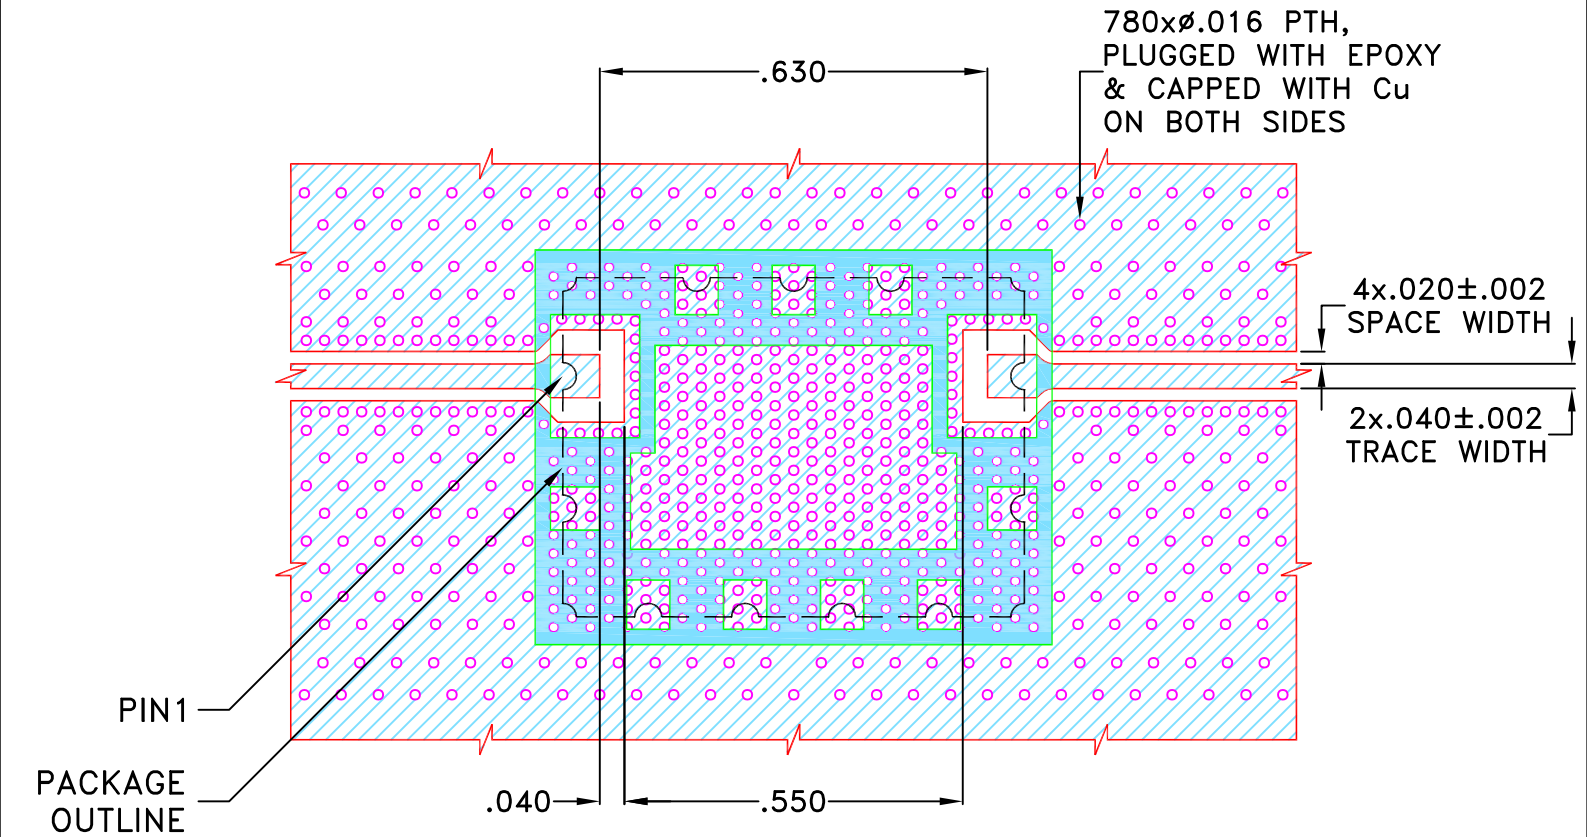

- NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .020±.0015. COPPER: 1/2 Oz. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ±	DRAWN	DDR	23 JUL 25
	CHECKED	GKK	23 JUL 25
	APPROVED	KN	23 JUL 25
 Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.			
ASHEETA1.DWG REV:A DATE:01/12/95			

 **Mini-Circuits®**
13 Neptune Avenue
Brooklyn NY 11235

PL DWG, RZ2511-1, TB-1274

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-761	REV: OR
FILE: 98-PL-761	SCALE: 3:1	SHEET: 1 OF 1	