
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-023573	NEW RELEASE	11/08/24	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR KC3009 CASE STYLE

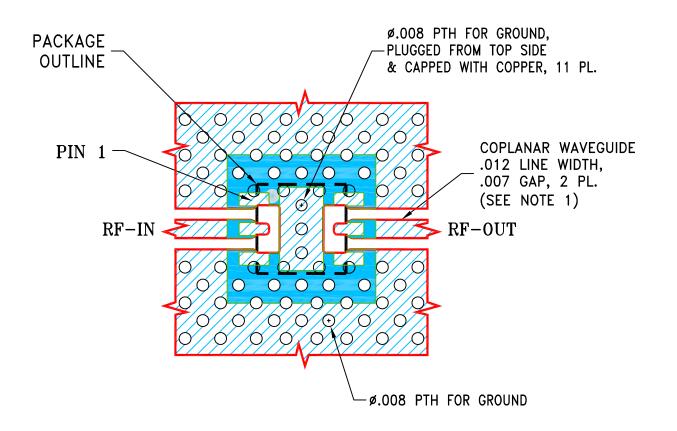

NOTES:

- 1. LINE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .0066"; COPPER: 1 OZ. EACH SIDE.
 FOR OTHER MATERIALS LINE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS		7 3 6 1 0 R					
DIMENSIONS ARE IN INCHES	DRAWN	ITG	11/08/24	Mini-Circuits 13 Neptune Avenue Brooklyn NY 11235					
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	11/08/24						
3 PL DECIMALS ± .005	APPROVED	IL	11/08/24						
FRACTIONS ±				PL,KC3009,TB-BAT-#+/TB-BAT-#C+					
Mini−	Circuits ®								
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE						1		1	
					CODE IDENT	DRAWING NO:		REV:	
					15542	98-PL-801		OR	
PARTY, IN WHOLE OR IN PART, WITHOU	UT WRITTEN PER	RMISSION OF MINI-C	IRCUITS.	FILE: OODT OO1	SCALE: 15.1	SHEET: 1	OT: 1		
	ASHEETA1.D	WG REV:A DA	TE:01/12/95	<u></u> . 6	98PL801	SCALE: 15:1 SHEET:		1 OF 1	