


		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	NPO-004886	NEW RELEASE	DEC 24	SKH	VR

SUGGESTED MOUNTING CONFIGURATION FOR AT3278 CASE STYLE

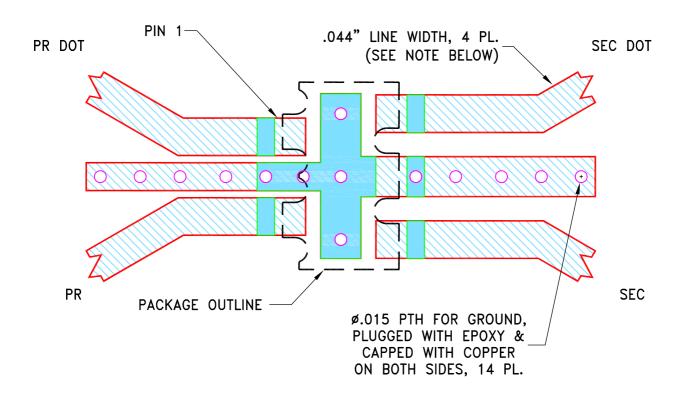

NOTES:

- 1. LINE WIDTH IS SHOWN FOR ROGERS RO4350B, DIELECTRIC THICKNESS: .020±.0015"; COPPER: 1/2 Oz EACH SIDE. FOR OTHER MATERIALS LINE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

ASHEETA1.DWG REV:A DATE:01/12/95



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

	UNLESS OTHERWISE SPECIFIED		INITIALS	DATE					
TC	DIMENSIONS ARE IN INCHES	DRAWN	SKH	17 DEC 24]				
	OLERANCES ON:	CHECKED	MD	17 DEC 24	L				
	3 PL DECIMALS ± .002 ANGLES ±	APPROVED	PV	17 DEC 24					
	FRACTIONS ±								
	☐ Mini-Circuits ®								
	THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE								
	AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE . MANUFACTURING AND REPRODUCTION RIGHTS THERETO.								
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTS									
	PARTY, IN WHOLE OR IN PART, WITHOU	ut written pei	RMISSION OF MINI-CI	RCUITS.					

Mini-Circuits 13 Neptune Avenue Brooklyn NY 11235

PL, AT3278, TB-TRS17818275+

SIZE	CODE IDENT 15542	DRAWING I		-PL-80	10	REV:	ΛÞ
A	15542		90	-L T-00	าฮ	· ·	OI
FILE: 98	3-PL-809	SCALE:	8:1	SHEET:	1	OF	1