



THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	EC0-028575	NEW RELEASE	02/19/25	ITG	IL


SUGGESTED MOUNTING CONFIGURATION FOR
PD1647-6 CASE STYLE

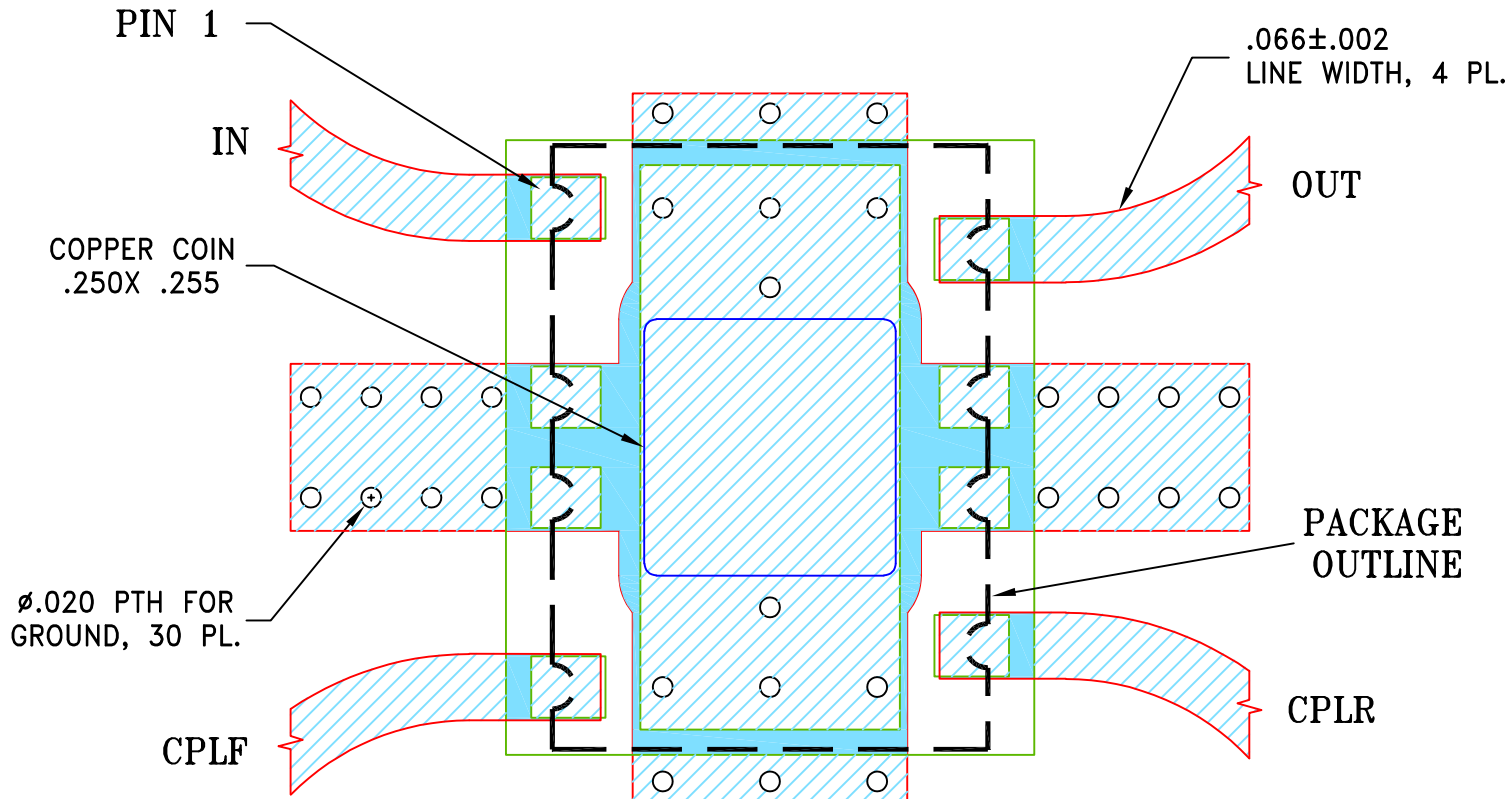**NOTES:**

1. LINE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.030 \pm .002$;
COPPER: 1/2 OZ. FOR OTHER MATERIALS LINE WIDTH MAY NEED TO BE MODIFIED.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:
2 PL DECIMALS $\pm$
3 PL DECIMALS $\pm$.005
ANGLES $\pm$
FRACTIONS $\pm$



INITIALS

DATE

DRAWN

ITG

02/19/25

CHECKED

NP

02/19/25

APPROVED

IL

02/19/25



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, PD1647-6, TB-SYDC2012UHP+

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE
A

CODE IDENT
15542

DRAWING NO:

98-PL-843

REV:

OR

FILE:

98PL843

SCALE:

5:1

SHEET:

1 OF 1

ASHEETA1.DWG REV:A DATE:01/12/95