


REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	NP0-005998	NEW RELEASE	FEB 26	LK	GT

SUGGESTED MOUNTING CONFIGURATION
FOR BBV3589-1

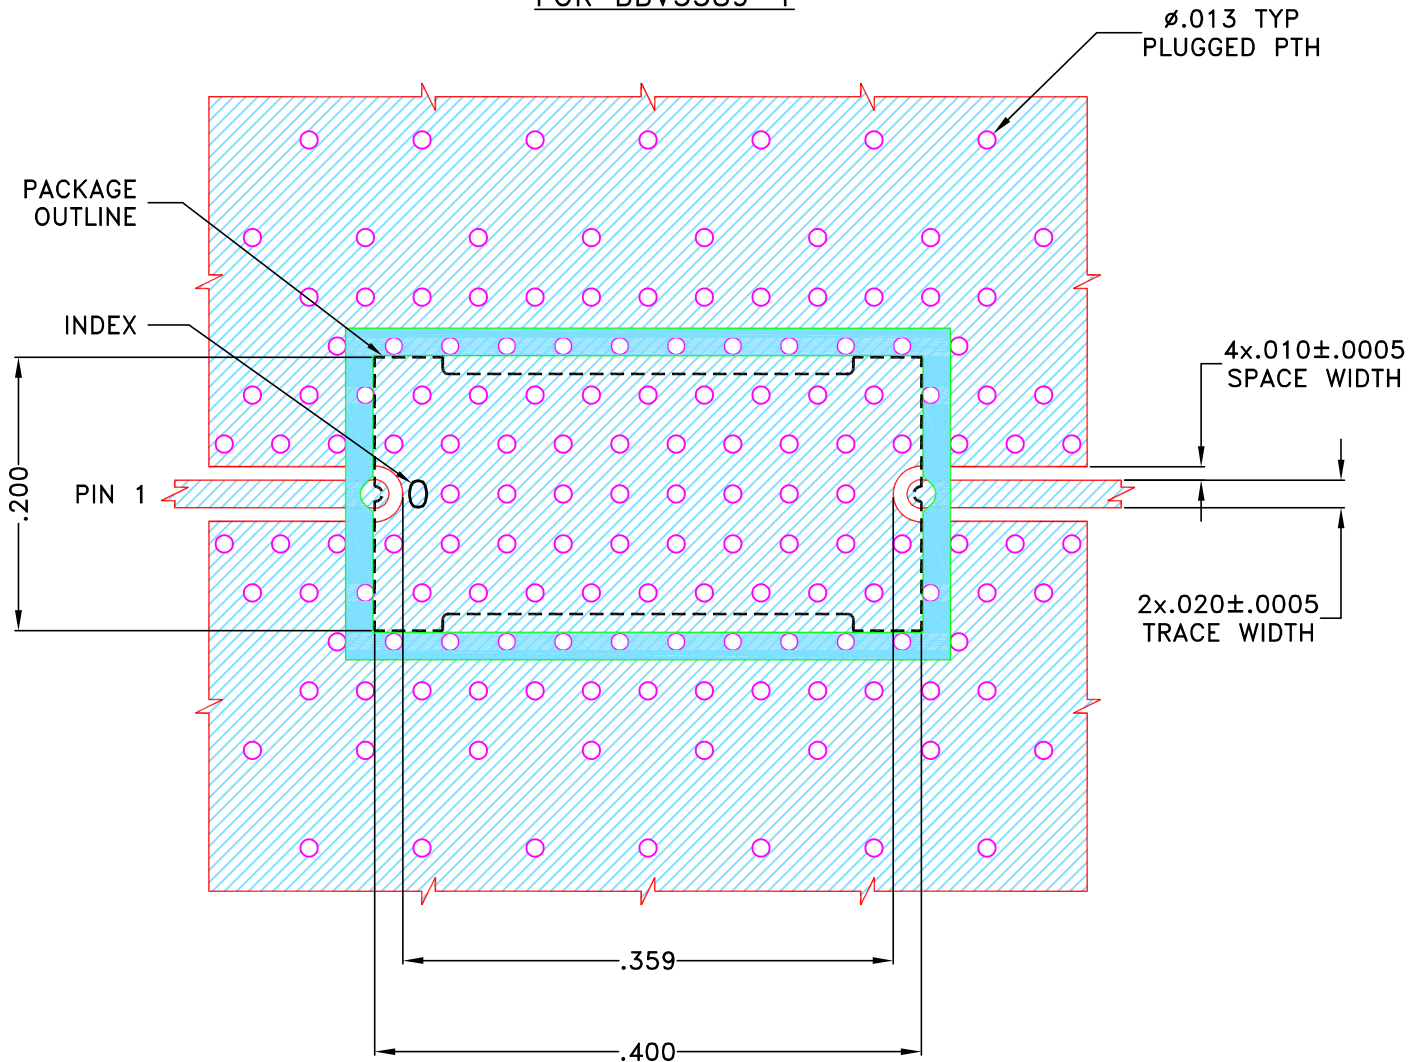

NOTES:

- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .010±.001; COPPER: 1/2 Oz. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED		INITIALS		DATE		Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235							
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .002 ANGLES ± FRACTIONS ± 	DRAWN	LK	02 FEB 26		PL, BBV3589-1, TB-ABF-16G+								
	CHECKED	MD	02 FEB 26										
	APPROVED	NRV	02 FEB 26										
Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.						SIZE A		CODE IDENT 15542		DRAWING NO: 98-PL-855		REV: OR	
ASHEETA1.DWG REV:A DATE:01/12/95						FILE: 98-PL-855		SCALE: 6.7:1		SHEET: 1 OF 1			