

PRODUCT CHANGE NOTICE

PCN Form (D4-E000-73)

PCN/EOL#16-037

NOTIFICATION DATE: June 27, 2016

MODEL(S) AFFECTED:

ZN4PD1-63W-S+

EXTENT OF CHANGE:

Discontinuation of ZN4PD1-63W-S+ and replacement by ZN4PD1-63HP-S+

EFFECT OF CHANGE:

Change to FIT (size), FORM (appearance) and FUNCTION (improved)
See datasheets at <http://www.minicircuits.com/pdfs/ZN4PD1-63HP+.pdf>

REASON FOR CHANGE:

Improved design for performance and manufacturing

EFFECTIVE DATE OF CHANGE:

Immediate, based on stock availability
Data available to support the change

ATTACHMENTS:

Application Note

QUESTIONS?

[PLEASE CONTACT US.](#)

REPLACEMENT PART REFERENCE GUIDE, ZN4PD1-63W-S+

ORIGINAL PART: ZN4PD1-63W-S+

REPLACEMENT PART: ZN4PD1-63HP-S+

Replacement Part has been judged by Mini-Circuits Engineering as a suitable replacement to Original Part

MECHANICAL DIMENSIONS

ORIGINAL PART: ZN4PD1-63W-S+


REPLACEMENT PART: ZN4PD1-63HP-S+

Case Style Change from


UU846 to UU846-4



FROM:

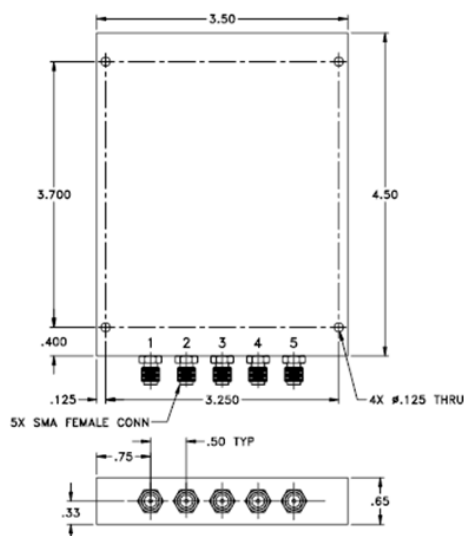

TO:

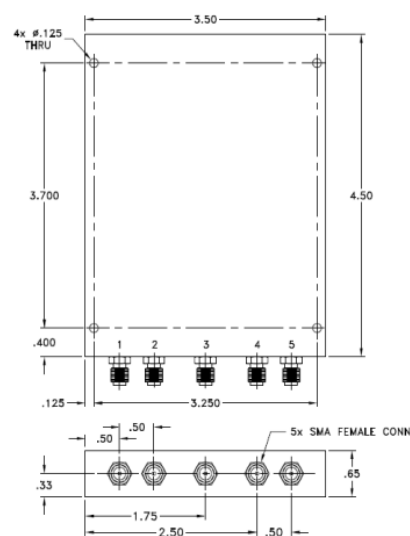

Notes:

a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

ORIGINAL PART: ZN4PD1-63W-S+

REPLACEMENT PART: ZN4PD1-63HP-S+

In new outline UU846-4, connectors at location 1 and 2 are moved on the left side by .25" (6.35mm) and connectors 4 and 5 are moved on the right side by .25" (6.35 mm).

Internally, PCB material is changed from OAK to TLP.

CONCLUSION:


Unit is a functional alternative with improved performance.

Following is a summary of changes/improvements. Typical performance curves are given below

Min/Max Specifications



Parameter	Original Part ZN4PD1-63W-S+	Replacement Part ZN4PD1-63HP-S+
Insertion Loss(max) @ 6000 MHz	3	2.5
Isolation (Min) @ 6000 MHz	12	13
Phase unbalance (max)	8	6
Amplitude unbalance (max)	0.8	0.6
VSWR (Max)@ (typ)	1.3:1	1.25:1

PERFORMANCE COMPARISON CURVES (TYPICAL)

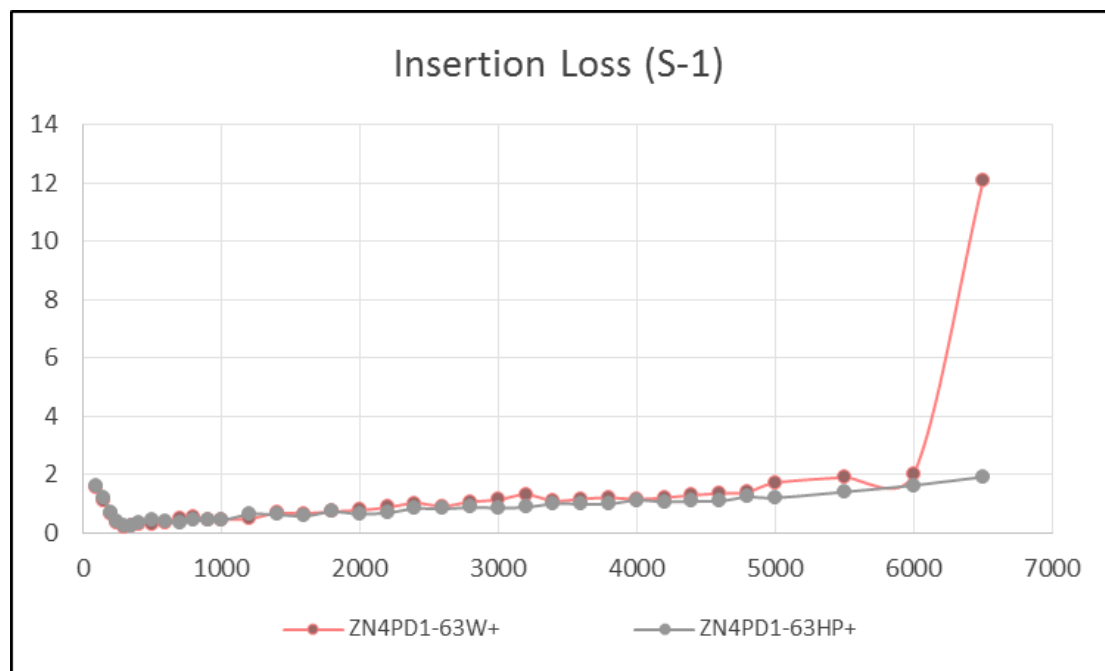

Notes:

a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

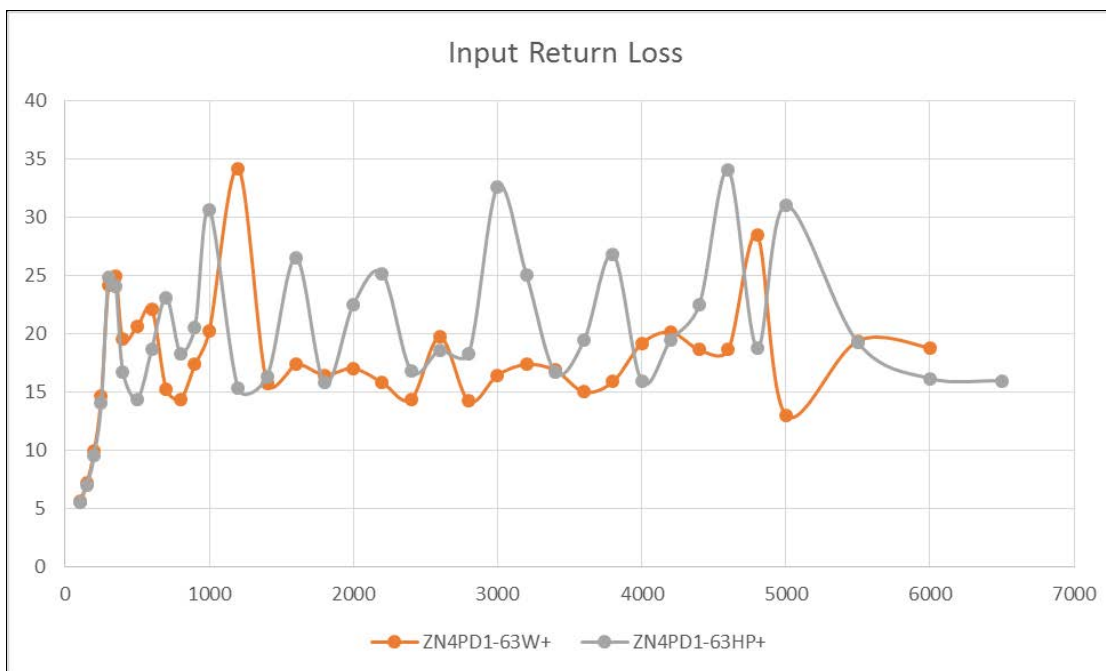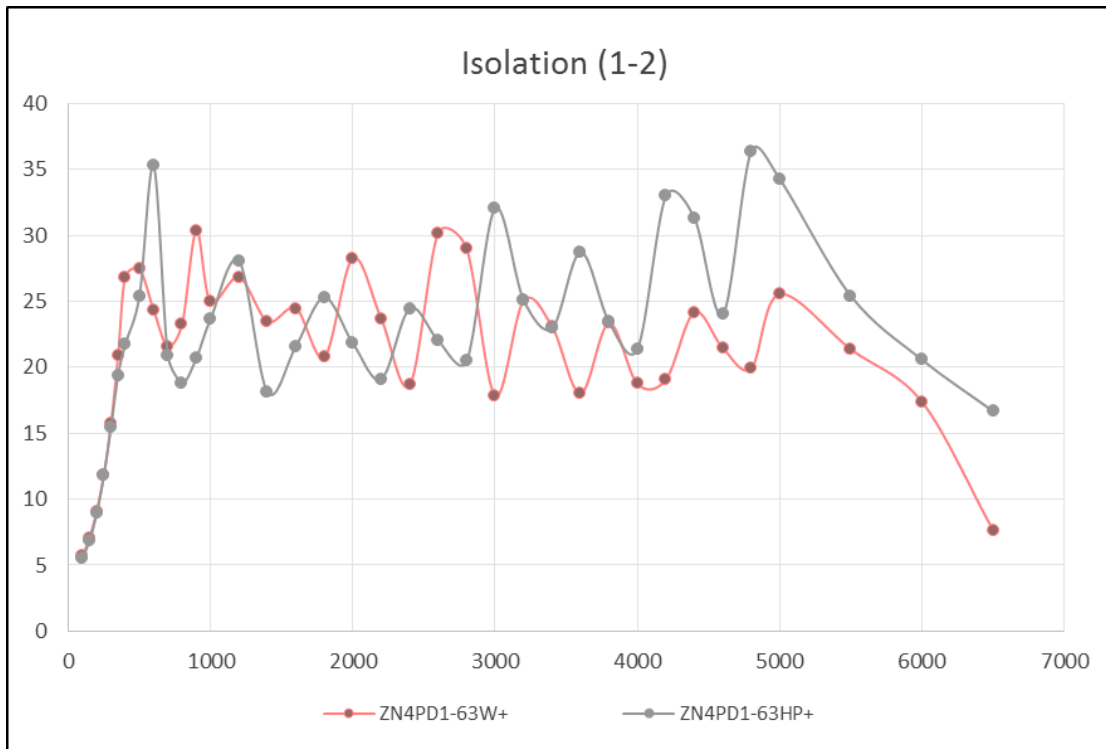

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.