



KEY FEATURES

- Ultra-Wideband, DC to 40 GHz
- Low Insertion Loss, 0.07 dB Typ.
- Excellent VSWR, 1.04:1 Typ.
- Straight Body



Generic photo used for illustration purposes only

PRODUCT OVERVIEW

Mini-Circuits' 24F-KF+ is a coaxial 2.4 mm-Female to 2.92 mm-Female adapter supporting a wide range of applications from DC to 40 GHz. This model provides excellent VSWR and low insertion loss versus frequency. The 24F-KF+ features passivated stainless-steel construction and measures only 0.75" in length.

ELECTRICAL SPECIFICATIONS¹ AT +25 °C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		40	GHz
Insertion Loss	DC-40	-	0.07	0.47	dB
VSWR	DC-40	-	1.04	1.20	:1

1. Specifications are tested to minimum frequency of 0.01 GHz.

ABSOLUTE MAXIMUM RATINGS²

Operating Case Temperature	-45 °C to +125 °C
Storage Temperature	-45 °C to +125 °C

2. Permanent damage may occur if any of these limits are exceeded.



COAXIAL




Adapter

24F-KF+

Mini-Circuits

50 Ω DC to 40 GHz 2.4 mm-Female to 2.92 mm-Female

TYPICAL PERFORMANCE GRAPHS

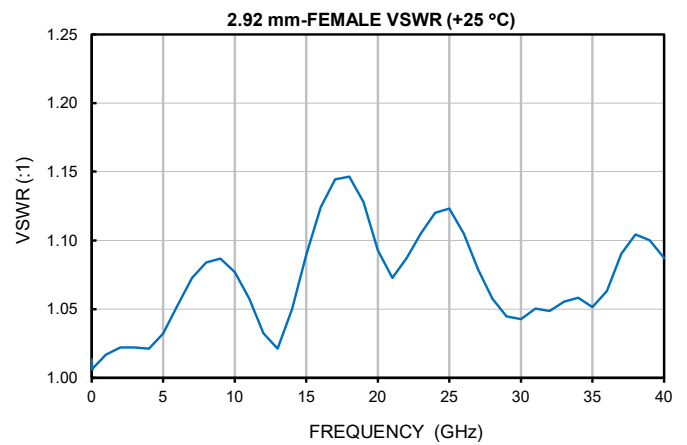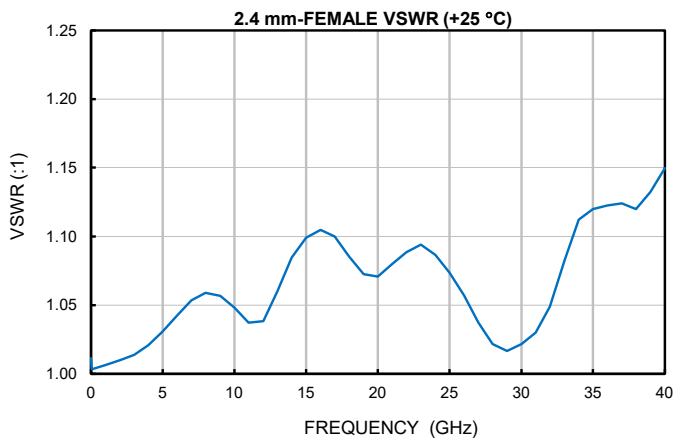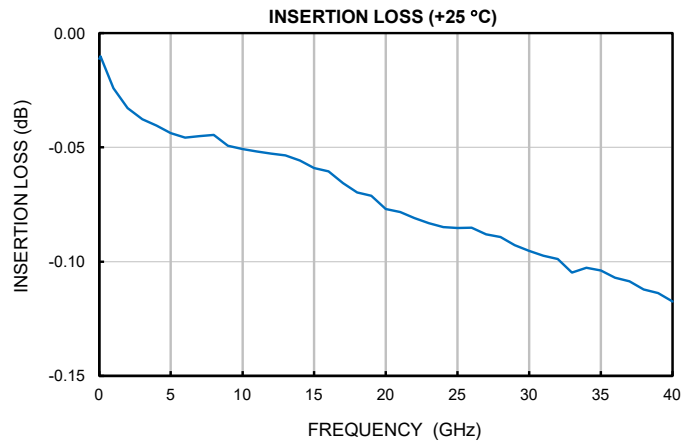




CONNECTOR SPECIFICATIONS

Description	Connector 1	Connector 2
Connector Type	2.4 mm-Female	2.92 mm-Female
Orientation	Straight	Straight

CASE STYLE DRAWING

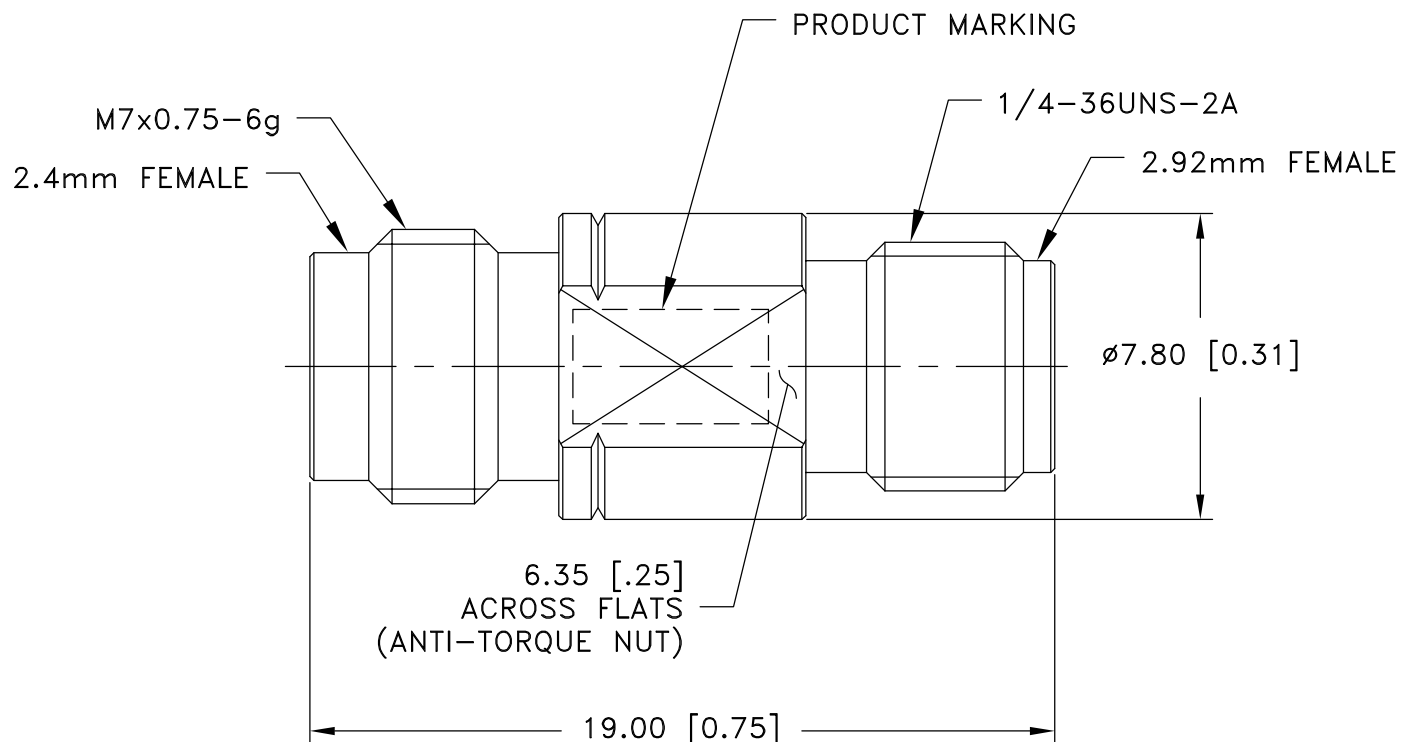

Weight: 3.5 grams

Dimensions are in mm [inches]. Tolerances: 2 Pl ±.40 mm

PRODUCT MARKING*: 24F-KF+

*Marking may contain other features or characters for internal lot control.



COAXIAL

Adapter

24F-KF+

50Ω DC to 40 GHz 2.4 mm-Female to 2.92 mm-Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DJ3748
RoHS Status	Compliant
Environmental Ratings	ENV152

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"; Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

