



LTCC SURFACE MOUNT

Band Pass Filter

BFCV-1332+

Mini-Circuits

50Ω 11 to 15 GHz

THE BIG DEAL

- Wide Passband, 11 to 15 GHz
- Low Insertion Loss, 2.0 dB Typical
- Wide Rejection Band
- High Power Handling, 6 W Maximum
- Small Size, 3.2x2.5 mm




Generic photo used for illustration purposes only

APPLICATIONS

- Microwave Radio Backhaul Systems
- EW and ECM Defense Systems
- Test and Measurement Equipment

FUNCTIONAL DIAGRAM

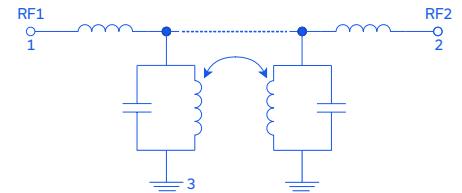

PRODUCT OVERVIEW

The BFCV-1332+ LTCC Band Pass Filter covers the passband from 11 to 15 GHz, with as low as 2.0 dB loss in the passband, and up to 47 dB stopband rejection. This model handles up to 6 W RF input power and provides a wide operating temperature range from -55 to +125°C. Utilizing a proprietary LTCC material system and a distributed filter topology, this filter achieves highly repeatable performance on a lot-to-lot basis.

ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency ⁴			13		GHz
	Insertion Loss	F2-F3	11-15	2	2.7	dB
	Return Loss	F2-F3	11-15	11		dB
Stopband, Lower	Rejection	DC-F1	DC-8.7	35	40	dB
Stopband, Upper	Rejection	F4-F5	18.2-27.5	37	47	dB

1. Tested in Evaluation Board P/N TB-BFCV-1332C+.

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

4. Typical variation $\pm 3\%$.


ABSOLUTE MAXIMUM RATINGS⁵

Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power ⁶	6 W max. at +25°C

5. Permanent damage may occur if any of these limits are exceeded.

6. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 4 W at +125°C.

TYPICAL FREQUENCY RESPONSE

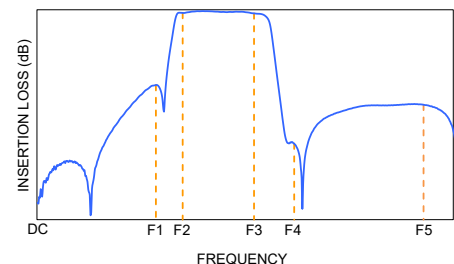

Mini-Circuits



LTCC SURFACE MOUNT





Band Pass Filter

BFCV-1332+

Mini-Circuits

50Ω 11 to 15 GHz

TYPICAL PERFORMANCE GRAPHS

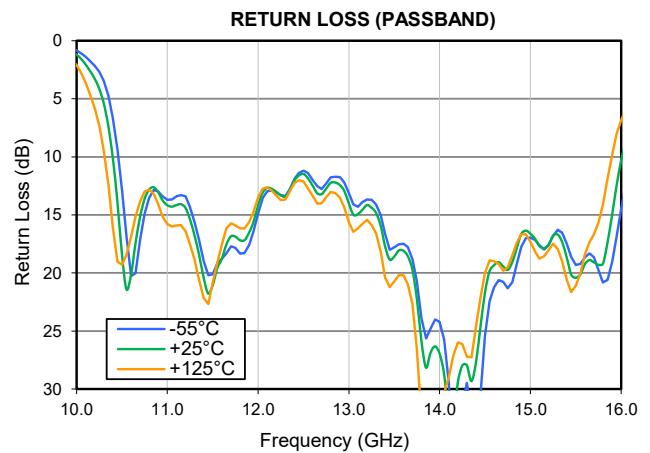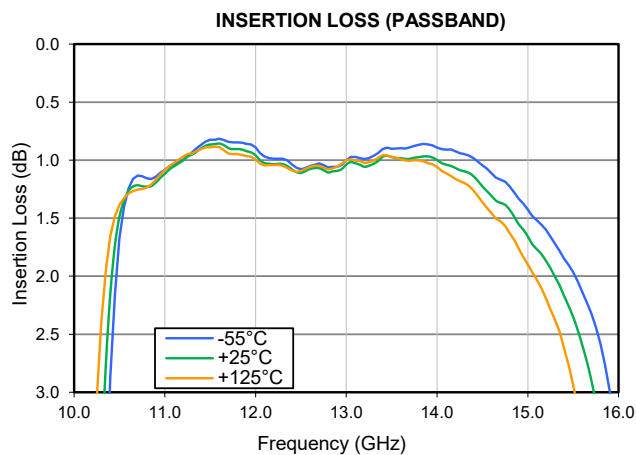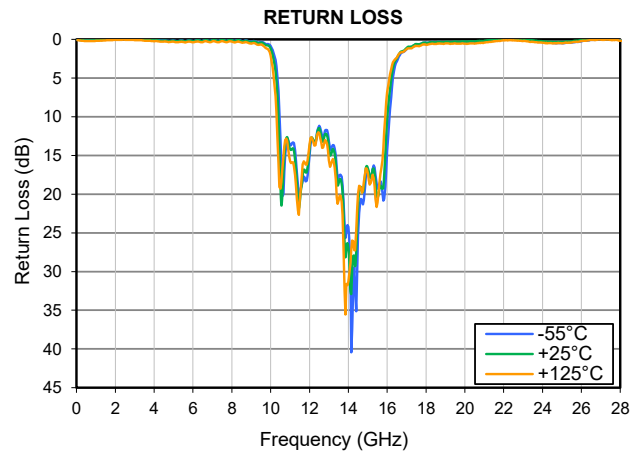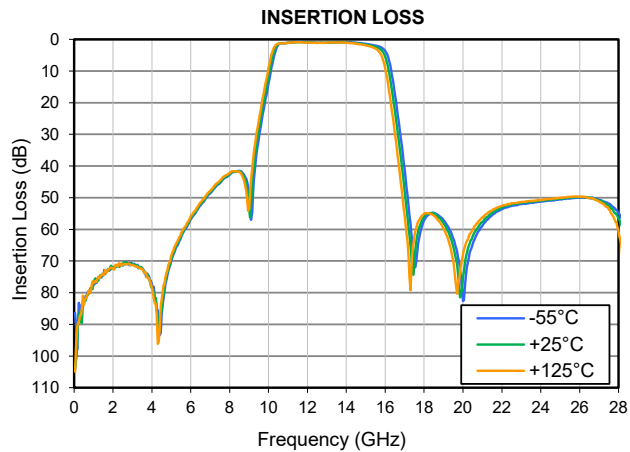



LTCC SURFACE MOUNT

Band Pass Filter

BFCV-1332+

Mini-Circuits

50Ω 11 to 15 GHz

FUNCTIONAL DIAGRAM

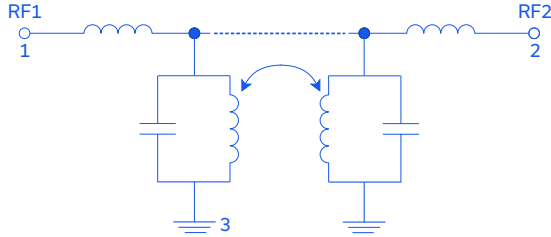


Figure 1. BFCV-1332+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF1	1	Connects to RF Input Port
RF2	2	Connects to RF Output Port
GROUND	3	Connects to Ground on PCB, (See drawing PL-822)

SUGGESTED PCB LAYOUT: PL-822


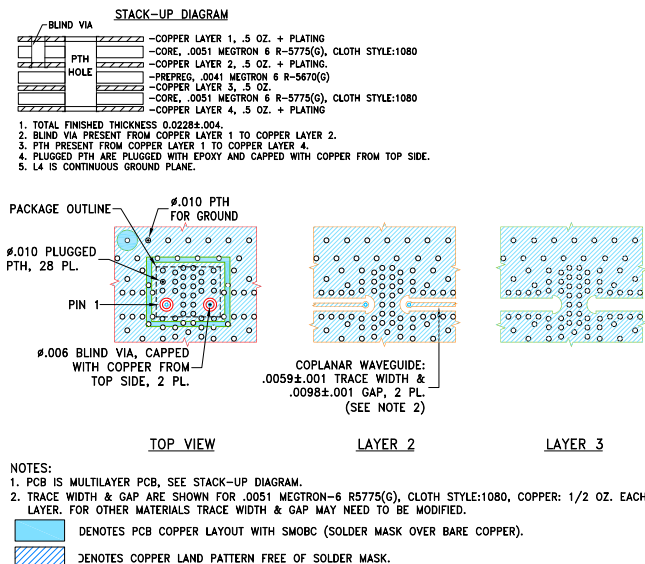


Figure 2. Suggested PCB Layout

CASE STYLE DRAWING

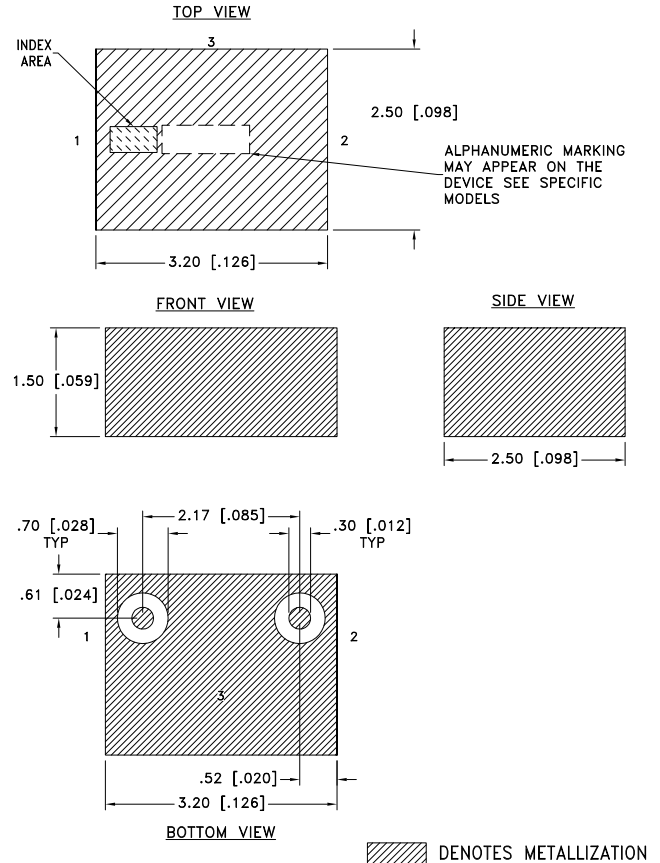

Weight: .040 grams

Dimensions are in mm [inches]. Tolerances: 2 Pl. ± 0.05 mm

PRODUCT MARKING*: K4

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

LTCC SURFACE MOUNT

Band Pass Filter

BFCV-1332+

50Ω 11 to 15 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	JV1210C-14 Lead Finish: Tin over Nickel plating
RoHS/REACH Status	Compliant
Tape and Reel	F74
Suggested Layout for PCB Design	PL-822
Evaluation Board	TB-BFCV-1332C+ Gerber File
Environmental Rating	ENV06T10

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

