


MMIC Surface Mount Wideband Double Balanced Mixer

MDB-44H+

Level 15 (LO Power 15dBm) 10-40 GHz

The Big Deal

- High L-R Isolation, 37 dB typ
- Useable as Up & Down Converter
- Small Size 3 x 3 x 0.89 mm



CASE STYLE: DQ1225

Product Overview

MDB-44H+ is an advanced wideband frequency mixer fabricated using InGaP HBT technology with integrated LO and RF Baluns. It has repeatable performance making it suitable for volume production. It is packaged in tiny 3 mm x 3 mm x 0.89 mm MCLP™ package.

Key Features

Feature	Advantages
Double Balanced	Results in excellent LO-RF (30-39 dB typical) & LO-IF (27-37 dB typical) Isolations minimizing need for external filtering
Wide Bandwidth, 10 to 40 GHz	Useful in wideband systems or in in several narrowband systems. Reducing inventory
Wide IF Bandwidth DC-15 GHz	Usable in first and second down converter applications. IF as low as DC enables use in phase detector applications.
3 mm x 3 mm, 12 lead MCLP Package	Low Inductance, repeatable transitions, excellent thermal contact to PCB


MMIC Surface Mount Wideband Double Balanced Mixer

MDB-44H+

Level 15 (LO Power 15dBm) 10-40 GHz

Product Features

- Wide bandwidth 10 to 40 GHz
- High L-R Isolation, 37 dB typ. at 25 GHz
- Useable as Up & Down Converter
- Small Size, 3mm x 3mm x 0.89 mm
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Typical Applications

- Satellite up and down converters
- Defense radar & communication
- VSAT
- Line of sight links
- Federal fixed service
- 5G
- ISM

General Description

MDB-44H+ is an advanced wideband frequency mixer fabricated using InGaP HBT technology with integrated LO and RF Baluns. It has repeatable performance making it suitable for volume production. It is packaged in tiny 3mm x 3mm x 0.89mm MCLP™ package.

simplified schematic and bonding pad description

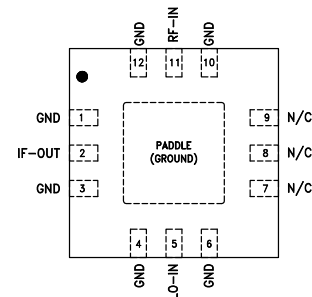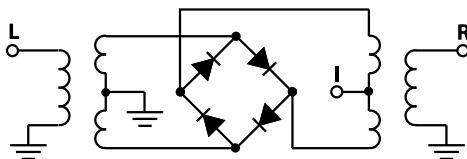

Function	Pad Number	Description
RF-IN	11	RF input
LO-IN	5	LO input
IF-OUT	2	IF output
GND	1,3,4,6,10,12 Paddle	Connect to Ground
NC	7-9	No connection, not used

Electrical Specifications¹ at 25°C, unless noted

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
RF Frequency Range		10		40	GHz
LO Frequency Range		10		40	GHz
IF Frequency Range		DC		15	GHz
LO Power			+15		dBm
Conversion Loss (at IF=30 MHz)	10 - 20	—	8.0	—	dB
	20 - 30	—	8.4	11.0	
	30 - 40	—	8.9	13.4	
LO-RF Isolation	10 - 20	—	39	—	
	20 - 30	25	37	—	
	30 - 40	—	30	—	
LO-IF Isolation	10 - 20	—	33	—	dB
	20 - 30	20	37	—	
	30 - 40	—	27	—	
RF-IF Isolation	10 - 20		24		dB
	20 - 30		16		
	30 - 40		31		
Input at 1dB Compression	10 - 40		10		dBm
Input IP3	10 - 20		20		dBm
Noise Figure	20		8.6		dB
Thermal Resistance (junction-to-ground lead)			105		°C/W

1. Measured on Mini-Circuits Characterization test board TB-973-MDB44HC+. See Characterization Test Circuit Figure 1

Absolute Maximum Ratings²

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
RF Power	21 dBm
LO Power	21 dBm
IF Current	30 mA

2. Permanent damage may occur if any of these limits are exceeded.
Electrical maximum ratings are not intended for continuous normal operation.

Characterization Test Circuit

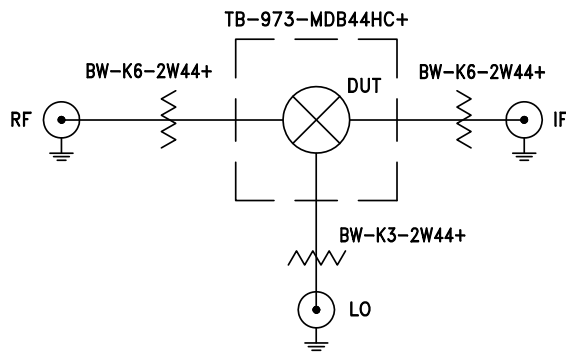


Figure 1A.
Block Diagram of Test Circuit used for characterization of Conversion Loss, Isolations (LO-RF, LO-IF, RF-IF) and Return Loss (LO, RF, IF)

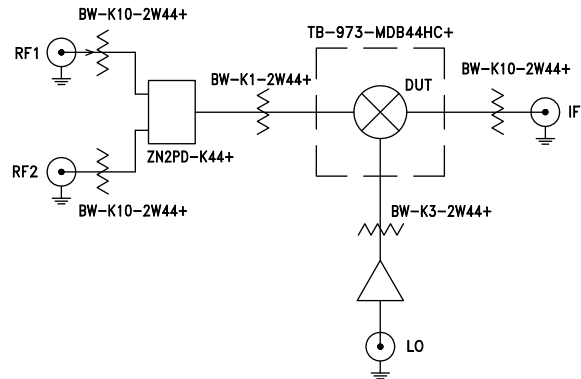


Figure 1B.
Block Diagram of Test Circuit used for characterization of Input IP3

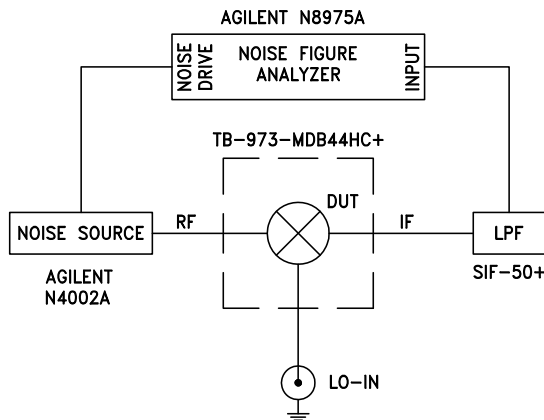



Figure 1C.
Block Diagram of Test Circuit used for characterization of Noise Figure

Figure 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-973-MDB44HC+). Conversion Loss, Isolations L-R, L-I & R-I, Input IP3 are measured using Agilent PSA E4448A spectrum Analyzer and PSG E8257D Signal Generators. NF is measured using Agilent's N8975A NF Analyzer


Conditions (Down Converter):

1. Conversion Loss, Isolations (L-R, L-I & R-I): RF= 0 dBm, LO=+15 dBm, IF=30 MHz
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.
3. Noise Figure: LO=+15 dBm

Application Circuit



Product Marking



Additional Detailed Technical Information	
<i>additional information is available on our dash board. To access this information click here</i>	
Performance Data	Data Table
	Swept Graphs
	S-Parameter (S1P Files) Data Set (.zip file)
Case Style	DQ1225 <i>Plastic package, exposed paddle, lead finish: Matte-Tin</i>
Tape & Reel Standard quantities available on reel	F66 <i>7" reels with 20, 50, 100, 200, 500, 1K and 2K devices</i>
Suggested Layout for PCB Design	PL-540
Evaluation Board	TB-973-MDB44HC+
Environmental Ratings	ENV08T1


ESD Rating

Human Body Model (HBM): Class 1A (250 to <500V) in accordance with ANSI/ESD STM 5.1 - 2001

MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

MSL Test Flow Chart

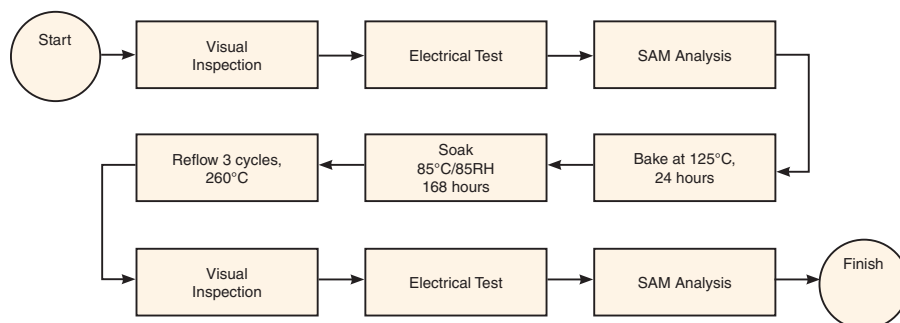

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp