

Coaxial

Low Pass Filter

50Ω DC to 520 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Features

- rugged shielded case
- other NLP models available with wide selection of cut-off frequencies

Applications

- lab use
- test equipment
- video equipment



CASE STYLE: FF57

Connectors	Model	Price	Qty.
N-Type	NLP-550(+)	\$35.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB) (loss > 40 dB)	Passband Typ. Stopband Typ.
DC-520	570	750-920 920-2000	1.7 18


Outline Drawing

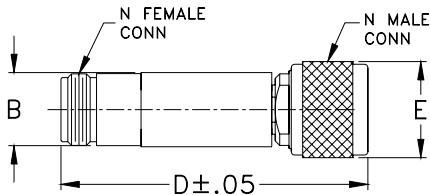


Outline Dimensions (inch/mm)

B	D	E	wt
.67	2.90	.82	grams
17.02	73.66	20.83	90.0

typical frequency response




electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$ σ			
10.00	0.02 0.1	44.6	10.00	1.55
152.50	0.10 0.1	28.0	80.00	1.61
222.50	0.15 0.1	28.8	152.50	1.61
295.00	0.27 0.1	18.0	222.50	1.61
365.00	0.38 0.1	15.3	295.00	1.75
437.50	0.36 0.1	19.6	365.00	1.93
520.00	0.57 0.1	20.4	437.50	2.32
550.00	0.75 0.1	20.8	520.00	2.99
570.00	1.17 0.3	12.7	540.00	3.34
580.00	1.68 0.4	9.2	550.00	3.66
620.00	7.07 1.1	2.3	570.00	4.37
720.00	26.51 1.6	0.2	580.00	4.59
730.00	28.52 1.6	0.3	600.00	4.68
740.00	29.95 1.6	0.3	620.00	3.72
750.00	31.57 1.6	0.4	650.00	2.39
760.00	33.24 1.7	0.4	720.00	2.08
800.00	39.85 1.9	0.3	730.00	0.04
870.00	50.78 2.4	0.2	740.00	0.99
900.00	55.60 2.9	0.2	750.00	0.81
910.00	58.10 4.7	0.2	760.00	0.89
920.00	59.19 4.2	0.2	780.00	1.49
1147.50	68.70 3.0	0.2	800.00	1.71
1290.00	68.19 3.5	0.1	850.00	2.48
1432.50	69.02 4.4	0.1	870.00	2.81
1572.50	75.22 5.7	0.1	900.00	1.61
1715.00	73.18 5.2	0.1	910.00	0.91
1787.50	71.84 3.4	0.1	920.00	0.83
1857.50	71.44 3.7	0.1	1147.50	0.80
1930.00	71.78 6.9	0.1	1217.50	0.73
2000.00	68.82 2.1	0.1	1290.00	0.65

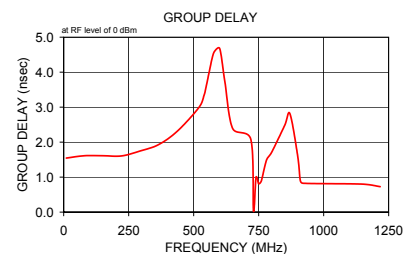

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. A
M98898
NLP-550
070514