


# Plug-In Attenuator/Switch

## PAS-3+

50Ω Bi-Phase 1 to 200 MHz



Generic photo used for illustration purposes only

CASE STYLE: A01

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Control Current	30mA
Permanent damage may occur if any of these limits are exceeded.	

### Pin Connections

INPUT	1
OUTPUT	8
CONTROL	3,4^
GROUND	2,5,6,7
CASE GROUND	2

^ pins must be connected together externally

### Outline Drawing

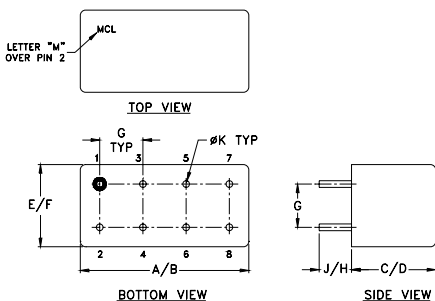

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

### Features

- wideband, 1 to 200 MHz
- hermetic case
- low insertion loss, 1.6 typ.
- excellent amplitude and phase unbalance

### Applications


- military hi-rel applications
- bi-phase modulator
- electronic attenuator

### Attenuator/Switch Electrical Specifications


FREQUENCY (MHz)		INSERTION LOSS (dB) ±20 mA				MAX. INPUT PWR (dBm) ±20 mA		IN-OUT ISOLATION (dB) 0 mA						BI-PHASE X (±20 mA) Typ. ΔAMP (dB) Phase (deg.) deviation from 180°			
IN	CON	Mid-Band m		Total Range		1 dB compr.	no damage	L	M	U		Total Range		Total Range			
f <sub>L</sub> -f <sub>U</sub>	DC-0.05	Typ.	Max.	Typ.	Max.			Typ.	Min.	Typ.	Min.	m		m			
1-200	DC-0.05	1.4	2.0	1.6	2.5	15	29	65	50	50	40	50	35	0.1	0.1	0.5	1.0

L = low range [f<sub>L</sub> to 10 f<sub>L</sub>] M = mid range [10 f<sub>L</sub> to f<sub>U</sub>/2] U = upper range [f<sub>U</sub>/2 to f<sub>U</sub>] m = [ 2 f<sub>L</sub> to f<sub>U</sub>/2]  
Performance specifications apply for input power up to 10 dB below stated 1 dB compression.

### suggested control port biasing configuration






### electrical schematic



### Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control ΔAMP (dB)	20mA ΔPhase (deg.)	Isolation (dB)		Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl			Input VSWR			
				(in-out)	(in-con)			1 MHz	100 MHz	200 MHz	1 MHz	100 MHz	200 MHz	1 MHz	100 MHz	200 MHz	
1.0	1.28	0.002	0.01	180.0	78	52	23.5	0.0000	50.3	47.8	41.7	26.3	69.1	69.7	13.6	11.6	8.1
2.0	1.14	0.002	0.01	180.0	75	45	28.1	0.0004	47.0	47.3	41.2	19.0	65.6	65.4	13.5	11.6	8.1
5.0	1.08	0.002	0.01	180.0	69	38	35.4	0.0013	43.6	45.7	40.5	10.3	50.0	58.2	13.3	11.5	8.0
10.0	1.09	0.002	0.01	180.0	65	32	43.0	0.0032	40.7	43.3	39.0	5.7	36.8	46.4	12.9	11.3	7.9
16.4	1.12	0.002	0.01	179.9	63	28	42.7	0.0085	34.7	38.0	35.6	6.3	20.9	29.7	12.5	10.9	7.7
24.9	1.16	0.002	0.01	179.9	62	24	37.5	0.0162	33.0	33.5	32.0	6.6	12.3	19.1	11.7	10.3	7.4
31.8	1.18	0.002	0.01	179.9	61	22	35.2	0.0336	28.2	27.9	27.0	7.2	7.0	10.3	10.5	9.2	6.8
46.8	1.23	0.001	0.02	179.8	59	19	31.6	0.0567	24.5	23.9	23.1	7.5	4.7	6.0	9.3	8.1	6.1
49.8	1.24	0.001	0.02	179.8	59	19	31.0	0.0807	22.0	21.2	20.5	7.7	3.9	4.3	8.3	7.3	5.6
62.2	1.26	0.002	0.02	179.8	58	17	28.7	0.1215	19.1	18.2	17.5	7.5	3.0	2.9	7.1	6.2	4.9
77.6	1.30	0.001	0.02	179.7	57	15	26.4	0.1860	16.1	15.2	14.6	7.1	2.4	1.8	5.8	5.1	4.2
93.0	1.32	0.001	0.02	179.6	56	14	24.4	0.2459	14.2	13.3	12.8	6.5	2.1	1.4	5.0	4.5	3.7
100.0	1.34	0.001	0.02	179.6	55	13	23.5	0.3285	12.5	11.5	11.1	6.3	1.8	1.1	4.3	3.8	3.2
108.0	1.35	0.001	0.02	179.6	55	13	22.6	0.4365	10.8	9.9	9.6	5.7	1.6	0.9	3.6	3.3	2.8
123.4	1.39	0.001	0.02	179.5	54	12	21.0	0.5714	9.3	8.5	8.2	5.1	1.4	0.7	3.1	2.8	2.5
138.8	1.46	0.001	0.02	179.5	53	12	19.5	1.3114	5.6	5.2	5.1	3.3	0.8	0.3	2.0	1.9	1.7
154.2	1.54	0.001	0.02	179.4	52	11	18.2	2.0989	4.2	3.9	3.9	2.3	0.6	0.3	1.6	1.6	1.5
169.2	1.62	0.001	0.02	179.5	51	11	17.0	3.7220	2.9	2.8	2.9	1.3	0.3	0.1	1.3	1.3	1.3
184.6	1.73	0.001	0.02	179.5	51	11	15.9	7.0357	2.0	2.0	2.2	0.5	0.2	0.0	1.2	1.2	1.2
200.0	1.84	0.002	0.03	179.6	50	11	14.8	15.1415	1.4	1.5	1.8	0.0	0.0	0.0	1.1	1.1	1.1

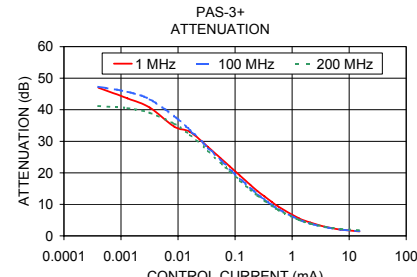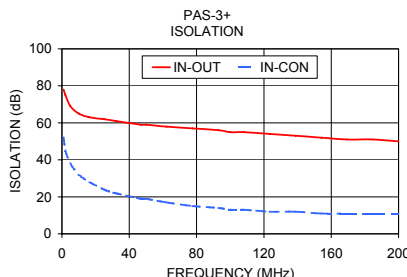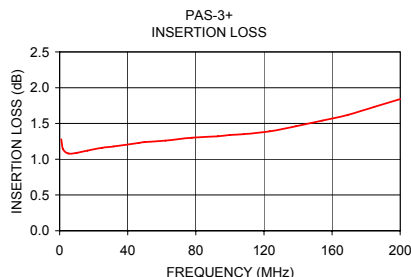

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C  
M151107  
PAS-3  
WP/TD/CP/AM  
150923