


# Plug-In Power Splitter/Combiner

**PSCQ-2-90+**  
**PSCQ-2-90**

2 Way-90° 50Ω 55 to 90 MHz




## Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.

## Pin Connections

SUM PORT	1
PORT 1 (+90°)	2
PORT 2 (0°)	5
GROUND	3,4,7,8
CASE GROUND	3,4,7,8
50 OHM TERM EXTERNAL	6

## Outline Drawing

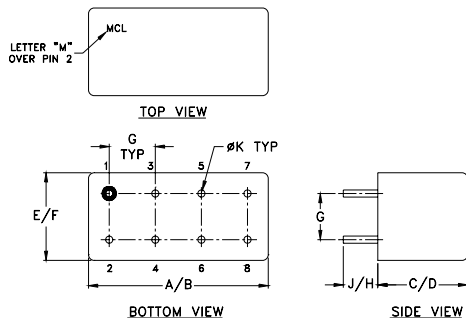

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.770	.800	.385	.400	.370	.400	
19.56	20.32	9.78	10.16	9.40	10.16	
G	H	J	K			wt
.200	.20	.14	.031			grams
5.08	5.08	3.56	0.79			5.2

## Features

- low insertion loss, 0.3 dB typ.
- high isolation, 30 dB typ.
- good VSWR, 1.20:1 typ.
- rugged shielded case

## Applications

- modulators
- balanced amplifiers

CASE STYLE: A01  
PRICE: \$28.20 ea. QTY. (1-9)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**




The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

## Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_L$ - $f_U$	Typ. Min.	Typ. Max.	Max.	Max.
55-90	30 20	0.3 0.7	3	1.2

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
55.00	3.23	3.04	0.19	33.09	89.78	1.07	1.07	1.04
57.50	3.14	3.14	0.00	32.45	89.78	1.07	1.08	1.05
60.00	3.07	3.23	0.17	31.81	89.80	1.08	1.08	1.05
62.50	3.01	3.31	0.30	31.19	89.80	1.09	1.09	1.05
65.00	2.97	3.37	0.40	30.53	89.82	1.10	1.09	1.06
67.50	2.94	3.42	0.48	29.88	89.85	1.10	1.10	1.06
70.00	2.93	3.46	0.53	29.23	89.87	1.11	1.11	1.06
72.50	2.94	3.48	0.54	28.56	89.90	1.12	1.12	1.07
75.00	2.96	3.49	0.53	27.90	89.95	1.13	1.13	1.07
77.50	3.00	3.48	0.48	27.23	89.99	1.14	1.14	1.08
80.00	3.05	3.45	0.40	26.54	90.05	1.15	1.15	1.08
82.50	3.12	3.41	0.29	25.84	90.12	1.17	1.17	1.09
85.00	3.22	3.36	0.14	25.14	90.21	1.18	1.18	1.10
87.50	3.34	3.29	0.06	24.41	90.31	1.20	1.20	1.11
90.00	3.49	3.20	0.29	23.67	90.44	1.22	1.22	1.12

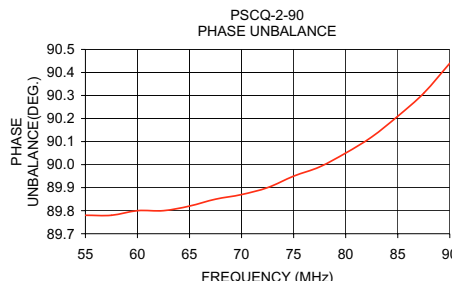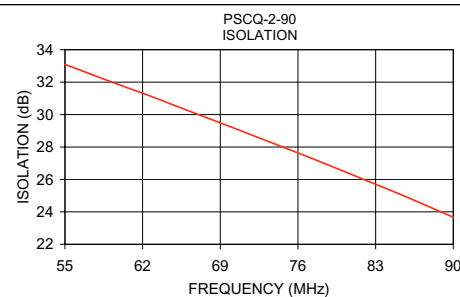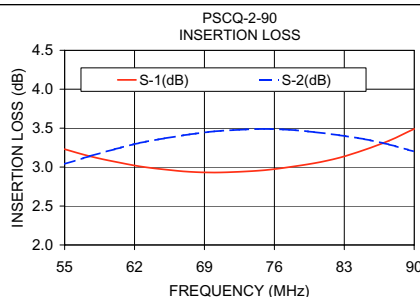

## electrical schematic



**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
**minicircuits.com**

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. A  
M98898  
PSCQ-2-90  
HY/TD/CP/AM  
070425