

X3 Frequency Multiplier

RMK-3-332+

50Ω Output 2100 to 3300 MHz



CASE STYLE: TT1224

The Big Deal

- Wideband, 2100 to 3300 MHz output
- Wide input power range, +10 to +15 dBm
- Low conversion loss, 15 dB typ.
- Excellent harmonic suppression, 40 dBc typ.

Product Overview

Mini-Circuits' RMK-3-332+ is a surface mount frequency multiplier with a multiplication factor of 3, converting input frequencies of 700 to 1100 MHz into output frequencies of 2100 to 3300 MHz. It provides a wide input power range, low conversion loss and excellent suppression of adjacent harmonics. The multiplier comes housed in a miniature surface-mount package (0.25 x 0.31 x 0.16") ideal for dense circuit board layouts.

Feature	Advantages
Wideband, 2100 – 3300 MHz output	With an output frequency range spanning 2100 to 3300 MHz, this multiplier covers a wide range of applications.
Low conversion loss, 15 dB typ.	Low conversion loss results in higher output signal power, reducing the need for amplification at later stages.
Excellent harmonic suppression: <ul style="list-style-type: none">• F2, 40 dBc typ.• F3, 37 dBc typ.	Reduces spurious signals and the need for additional filtering. Helps avoid spectral regrowth in multiple-channel systems.
Wide input power range, +10 to +15 dBm	Wide input power signal range accommodates different input signal levels while still maintaining a low conversion loss.
Low cost	Provides an easy, cost-effective solution for generating high-frequency signals from a lower frequency signal source.
Small size, 0.25 x 0.31 x 0.16"	Saves space in dense circuit board layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X3 Frequency Multiplier

50Ω Output 2100 to 3300 MHz

RMK-3-332+



CASE STYLE: TT1224
PRICE: \$8.95 ea. QTY (10-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6


Outline Drawing

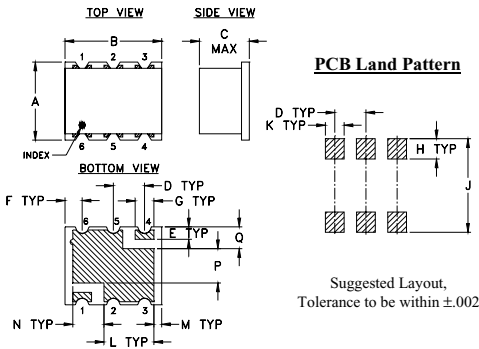

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	
.25	.31	.16	.100	.040	.055	.060	.065	
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65	
J	K	L	M	N	P	Q	wt.	
.300	.060	.160	.025	.100	.110	.070	grams	
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16	

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

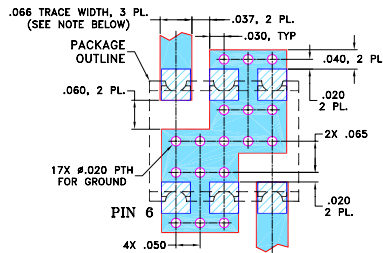

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low input power, +10 dBm
- low conversion loss, 15 dB typ.
- high rejection of adjacent harmonics, 40 dBc typ.
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters

Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Multiplier Factor		3		
Frequency Range, Input (F1)	700		1100	MHz
Frequency Range, Output (F3)	2100		3300	MHz
Input Power	10		15	dBm
Conversion Loss		15.6	20	dB
Harmonic Output*	F1	-3	3	dBc
	F2	25	40	
	F4	24	37	

* Harmonics of input frequency below the power level of F3

Typical Performance Data

Input Frequency (MHz)	INPUT RF= 10 dBm				INPUT RF= 15dBm			
	Conversion Loss (dB)	Harmonic Output Below F3 (dBc)			Conversion Loss (dB)	Harmonic Output Below F3 (dBc)		
	F3	F1	F2	F4	F3	F1	F2	F4
700	15.23	8.29	34.75	30.69	16.80	9.97	37.49	31.86
760	14.26	7.61	37.07	34.81	15.74	9.47	38.29	35.95
780	14.66	6.97	39.19	36.81	15.47	9.26	41.87	41.30
800	14.37	6.68	45.91	42.27	15.41	8.88	48.74	52.41
820	13.82	6.63	50.71	47.51	15.43	8.45	50.06	55.73
840	13.81	6.22	51.23	49.55	15.28	8.03	50.69	48.69
860	14.35	5.48	50.58	50.68	15.35	7.56	54.99	54.91
880	14.10	5.18	50.70	53.46	15.40	7.15	49.07	49.70
900	13.57	5.20	66.29	72.85	15.54	6.64	61.36	63.84
920	13.57	4.77	69.31	80.23	15.48	6.08	66.64	70.85
940	14.14	3.97	73.17	78.32	15.62	5.62	74.28	84.06
960	14.00	3.62	70.78	74.62	15.88	5.10	75.81	83.07
1000	13.50	3.23	69.53	73.79	15.99	3.99	74.14	77.51
1100	14.17	0.94	66.64	75.41	17.03	1.55	69.48	74.88

