

Voltage Controlled Oscillator

ROS-300R+

50Ω 150 to 280 MHz

The Big Deal:

- Good Harmonic Suppression
- High Power Output
- Robust design and construction
- Small size .500" x .500" x .180"



Generic photo used for illustration purposes only

CASE STYLE: CK605

Product Overview:

The ROS-300R+ is a Voltage Controlled Oscillator, designed to operate from 150 to 280 MHz for test equipment applications. The ROS-300R+ is packaged in a metal case (size of .500" x .500" x .180") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Good Harmonic Suppression, -28 dBc typ.	Provides clear signals suitable for systems requiring high spectral purity.
Low Phase Noise: -102 dBc/Hz typ at 10kHz offset	Low phase noise improves system EVM (Error Vector Magnitude).
High Power Output, +9 dBm typ.	Reduces amplification requirements and improves immunity to external noise sources.
Small size, .500" x .500" x .180"	The small size enables the ROS-300R+ to be used in compact designs.

Surface Mount

Voltage Controlled Oscillator

ROS-300R+

Linear Tuning 150 to 280 MHz

Features

- low phase noise, -102 dBc/Hz typ. @ 10kHz offset
- high power output, +9 dBm typ.
- low harmonics, -28 dBc typ.
- aqueous washable

Applications

- wireless communications
- test equipment
- broadcasting



Generic photo used for illustration purposes only

CASE STYLE: CK605

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER					
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)		Typ.	Typ.			Typ.	Typ.	Typ.	Max.	Vcc (volts)	Current (mA)
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Typ.	Max.				
ROS-300R+	150	280	+9	-80	-102	-122	-142	1	16	7 - 17	340	0.1	-90	-28	-18	0.5	0.6	12	20				

Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	13V
Absolute Max. Tuning Voltage (Vtune)	18V
All specifications	50 ohm system


Permanent damage may occur if any of these limits are exceeded.

Tape & Reel: F37


7" Reels with 10, 20, 50, 100 devices
13" Reels with 200, 500 devices

Environmental Ratings: ENV65


Outline Drawing

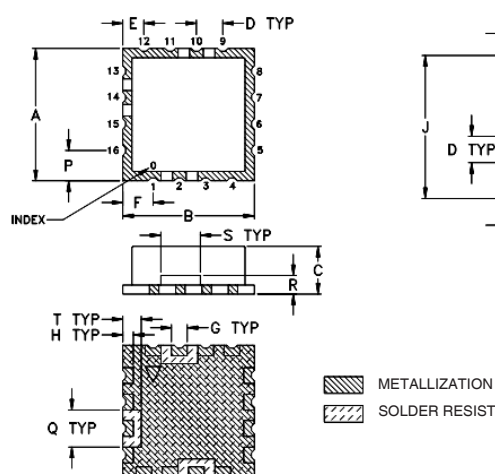

PCB Land Pattern



Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

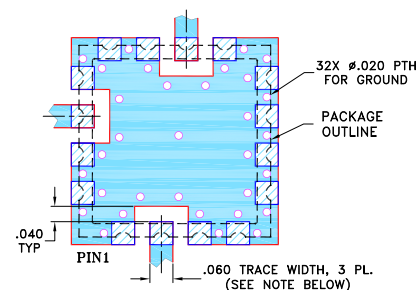

NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0









www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M176959
EDR-11838
ROS-300R+
RAV
200323
Page 2 of 3

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (kHz)	PHASE NOISE at 215 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	10.71	114.0	111.6	109.7	7.74	7.10	6.21	16.57	-21.0	-44.7	-40.9	0.19	0.03	-81.39	-101.7	-122.7	-145.0	1.0	-81.46
1.00	10.98	124.3	122.9	121.9	8.98	9.12	8.81	16.56	-27.4	-47.1	-45.5	0.42	0.02	-85.79	-107.6	-127.5	-148.7	2.0	-87.46
2.00	9.32	135.1	133.6	132.3	9.28	9.48	9.21	16.37	-29.6	-44.6	-46.3	0.20	0.05	-85.41	-108.3	-129.3	-150.6	3.5	-93.09
3.00	9.56	144.8	143.1	141.7	9.49	9.66	9.46	16.21	-27.8	-41.7	-46.3	0.12	0.04	-88.51	-108.8	-129.0	-149.5	6.0	-98.04
4.00	10.40	154.8	152.8	151.3	9.58	9.85	9.65	16.06	-26.8	-41.1	-47.1	0.03	0.13	-84.21	-107.4	-128.5	-149.9	8.5	-101.50
5.00	11.52	165.8	163.7	161.9	9.72	10.01	9.76	15.89	-26.6	-40.6	-46.4	0.03	0.10	-84.14	-106.7	-127.1	-147.8	10.0	-103.13
6.00	13.74	178.2	176.3	174.4	9.70	9.99	9.86	15.72	-26.7	-40.0	-45.3	0.01	0.03	-83.85	-106.4	-125.3	-144.7	20.8	-109.55
7.00	15.81	192.4	190.2	188.5	9.62	10.05	9.93	15.56	-28.0	-39.2	-45.9	0.12	0.04	-83.61	-104.7	-124.5	-144.0	35.5	-114.32
8.00	16.82	208.3	205.7	203.9	9.46	9.93	9.69	15.40	-28.6	-39.0	-46.4	0.22	0.27	-82.84	-103.7	-124.2	-144.9	60.7	-118.85
8.50	17.47	216.5	214.2	212.4	9.18	9.70	9.57	15.32	-28.7	-39.6	-45.2	0.41	0.22	-83.63	-103.1	-123.3	-143.3	86.7	-122.10
9.50	16.38	233.9	231.2	229.0	8.92	9.48	9.44	15.19	-30.6	-39.5	-44.7	0.40	0.41	-81.45	-102.5	-123.7	-143.7	100.0	-123.34
10.00	17.50	241.9	239.4	237.6	8.73	9.32	9.29	15.13	-30.8	-39.9	-46.5	0.67	0.35	-79.27	-102.3	-122.9	-143.6	148.1	-126.80
11.00	15.15	259.3	256.5	254.2	8.42	9.01	9.06	15.03	-30.0	-39.3	-45.8	0.64	0.11	-79.26	-101.4	-122.9	-143.7	177.0	-128.42
11.50	15.47	266.6	264.0	262.1	8.17	8.81	8.83	14.99	-28.4	-40.2	-45.5	0.67	0.08	-81.26	-101.8	-122.8	-144.2	211.6	-129.98
12.50	14.59	282.9	279.7	277.7	7.57	8.23	8.34	14.92	-27.0	-40.0	-51.1	1.05	0.33	-78.41	-101.0	-121.9	-143.5	302.4	-133.13
13.00	12.83	290.5	287.0	284.8	7.42	8.07	8.19	14.90	-26.7	-39.6	-51.2	0.88	0.46	-78.48	-102.1	-122.3	-143.7	361.5	-134.67
14.00	10.08	302.3	299.1	296.9	7.22	7.82	7.91	14.86	-24.8	-40.4	-45.1	0.59	0.56	-78.67	-102.4	-122.8	-143.8	507.5	-137.62
14.50	9.68	306.9	304.1	302.2	7.05	7.66	7.75	14.85	-24.5	-41.2	-43.7	0.65	0.60	-78.46	-102.4	-122.6	-143.7	606.7	-139.12
15.50	8.87	316.0	313.7	312.1	6.70	7.32	7.45	14.82	-24.1	-43.6	-42.6	0.82	0.71	-81.16	-101.7	-121.9	-143.1	851.6	-141.92
16.00	8.18	320.4	318.1	316.5	6.61	7.22	7.36	14.81	-24.0	-44.4	-43.0	0.76	0.73	-80.04	-100.9	-121.6	-142.6	1000.0	-143.17

*at 25°C unless mentioned otherwise

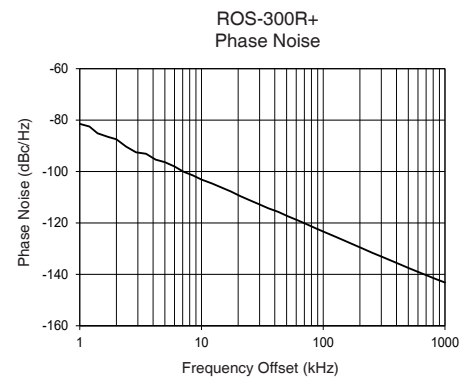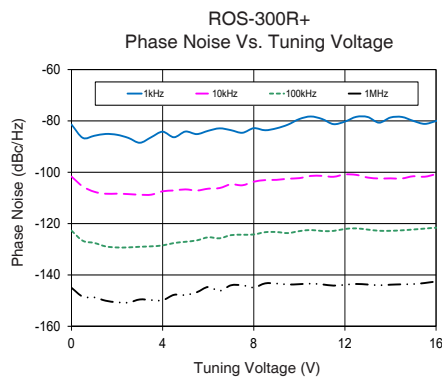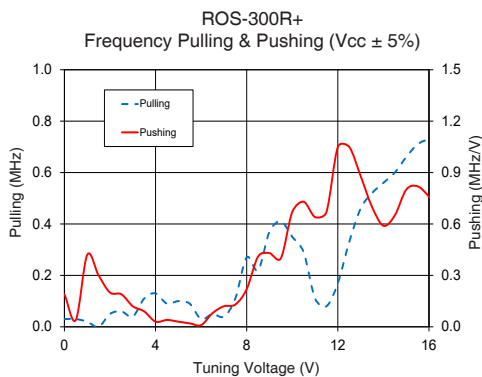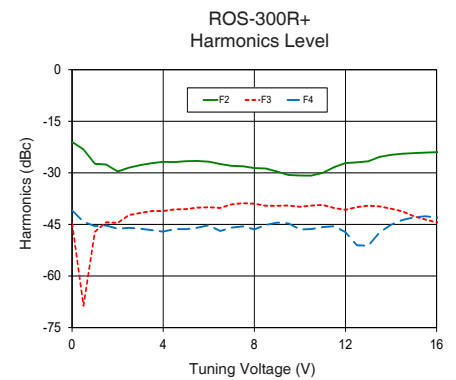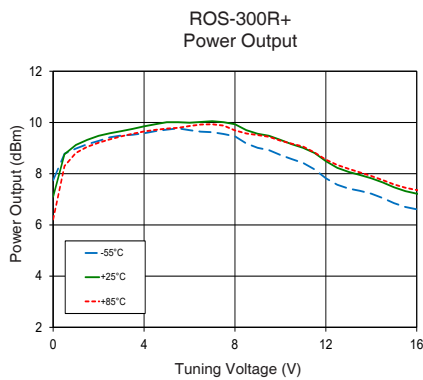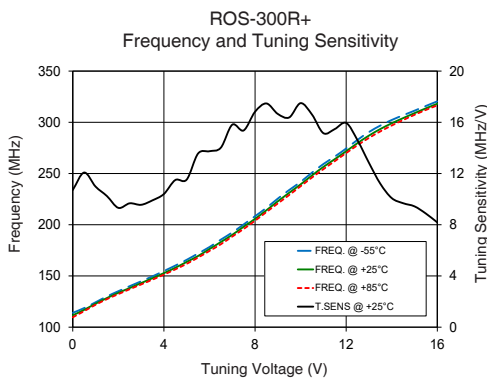

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

