


# Surface Mount High Pass Filter

## SXHP-2+

50Ω      2 to 400 MHz

### The Big Deal

- Low insertion loss
- High rejection
- Miniature shielded package



Generic photo used for illustration purposes only  
CASE STYLE: HF1139

### Product Overview

SXHP-2+ is a 50Ω high pass filter fabricated using SMT technology. This high pass filter covers from 2-400 MHz. This filter is built with high Q capacitors and wire wound inductors for superior performance. It has repeatable performance across lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Low insertion loss	Can be used in high performance applications.
Good rejection	This enables the filter to attenuate spurious signals and reject harmonics for broad frequency band.
Small size, 0.44" x 0.74" x 0.27"	The small surface mount package enables the SXHP-2+ to be used in compact designs.

#### Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount High Pass Filter

50Ω 2 to 400 MHz

## SXHP-2+



Generic photo used for illustration purposes only  
CASE STYLE: HF1139

### Features

- Low Insertion loss
- High Rejection
- Miniature shielded package

### Applications

- Broadcasting
- Maritime mobile
- Radar applications

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Stop Band	Rejection Loss	DC-F1	DC-1.3	20	37	-	dB
	VSWR	DC-F1	DC-1.3	-	20	-	:1
Pass Band	Insertion Loss	F2-F4	2-400	-	0.6	1.5	dB
	VSWR	F2-F3	2-200	-	1.3	1.43	:1
		F3-F4	200-400	-	1.3	-	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5 W max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

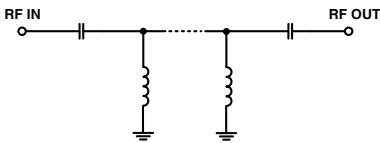





### Typical Frequency Response



### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
0.30	101.47	1546.66
0.92	48.15	211.72
1.20	50.36	98.23
1.30	40.66	71.73
1.36	31.58	57.42
1.37	30.36	55.18
1.47	19.92	33.28
1.58	10.41	13.09
1.70	3.09	3.13
2.00	0.59	1.20
4.00	0.20	1.06
8.00	0.14	1.04
16.00	0.12	1.04
32.00	0.11	1.03
50.00	0.12	1.04
100.00	0.14	1.05
150.00	0.15	1.07
200.00	0.18	1.09
300.00	0.24	1.15
400.00	0.42	1.24

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

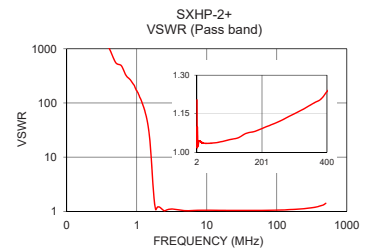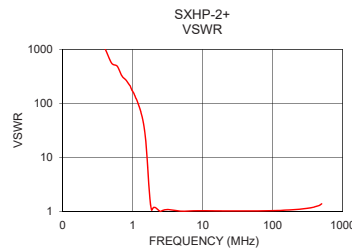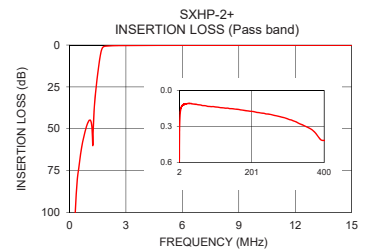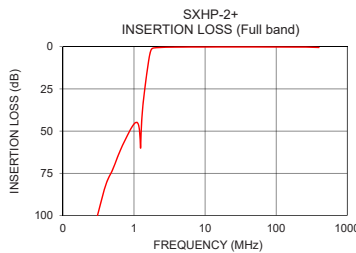

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



