

Balanced to Unbalanced RF Transformer

50 Ω 5 to 1500 MHz

TC1-1T-152X-1+

Features

- suitable for tin/lead and RoHS solder systems
- wideband, 5 to 1500 MHz
- balanced transmission line
- excellent phase unbalance, 1.5° typ
- excellent amplitude unbalance, 0.2 dB typ.
- aqueous washable

Applications

- VHF/UHF transmitters
- cellular
- GPS
- communication

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			1		Ohm
Frequency Range		5		1500	MHz
Insertion Loss*	5 - 870	—	1.0	1.6	dB
	870 - 1000	—	1.2	1.7	
	1000 - 1500	—	1.8	2.5	
Amplitude Unbalance	5 - 870	—	0.1	0.7	dB
	870 - 1000	—	0.3	0.9	
	1000 - 1500	—	0.5	1.8	
Phase Unbalance	5 - 870	—	1.0	6	Degree
	870 - 1000	—	2.0	8	
	1000 - 1500	—	3.0	10	
Common mode rejection	5-1000	22	33	—	dB
	1000-1500	20	28	—	
Input Return Loss	5-870	—	15	—	dB
	870-1000	—	12	—	

* Insertion Loss is referenced to mid-band loss, 0.7 dB typ.



Generic photo used for illustration purposes only

CASE STYLE: AT1521

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

Maximum Ratings


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.5W
DC Current	200mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

Function	Pin Number
PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2


Product Marking




Config. M1

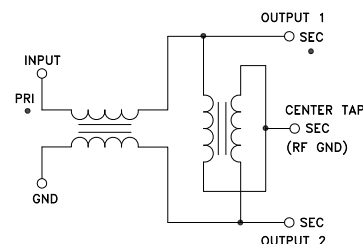

Outline Drawing

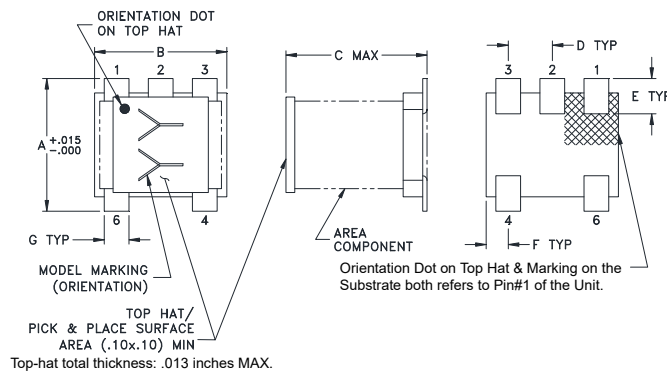

PCB Land Pattern




Suggested Layout,
Tolerance to be within $\pm .002$

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.150	.150	.160	.050	.040	.025	.028	.065	.190
3.81	3.81	4.06	1.27	1.02	0.64	0.71	1.65	4.83

Typical Performance Data

FREQUENCY (MHz)	AVERAGE INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)	CMRR (dB)
5	0.79	21.59	0.00	0.00	77.68
10	0.71	24.37	0.00	0.06	65.55
100	0.73	24.80	0.02	0.64	44.93
200	0.77	21.92	0.05	1.25	38.91
400	0.87	17.73	0.11	1.80	35.39
600	0.98	15.25	0.04	2.27	34.01
800	1.14	13.56	0.05	2.86	32.01
1000	1.32	12.43	0.24	3.05	30.47
1200	1.54	11.48	0.47	3.23	28.19
1400	1.79	10.65	0.70	3.24	26.17
1500	1.92	10.27	0.81	3.16	25.34

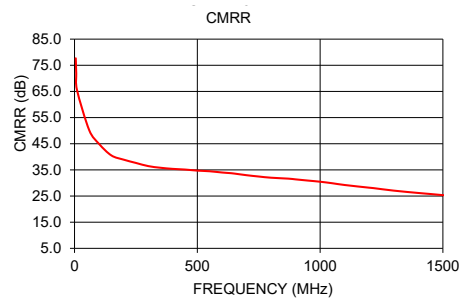

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp