


RF Transformer

TCL1-11G2+

50Ω 600 to 1100 MHz



CASE STYLE: AT224-3

Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25 W
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

Features

- wideband, 600 to 1100 MHz
- balanced transmission line
- excellent amplitude unbalance, 0.6 dB typ.
- excellent phase unbalance, 8 deg typ.
- leadless surface mount
- aqueous washable

Applications

- cellular
- baluns
- impedance matching

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost


Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

Transformer Electrical Specifications


Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*	
		2 dB MHz	1 dB MHz
1	600-1100	600-1100	700-1000

* Insertion Loss is referenced to mid-band loss, 0.4 dB typ.

Outline Drawing AT224-3

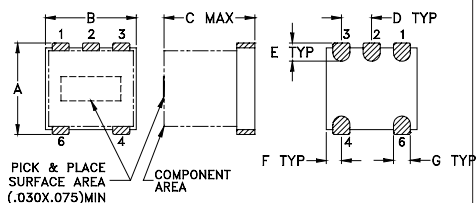

PCB Land Pattern



Suggested Layout
Tolerance to be within ±.002


Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.150	.150	.150	.050	.030	.025	
3.81	3.81	3.81	1.27	0.76	0.64	
G	H	J	K			wt
.028	.065	.190	.030			grams
0.71	1.65	4.83	0.76			0.10


Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
600.00	0.70	11.42
700.00	0.50	13.14
800.00	0.35	16.75
825.00	0.45	18.23
850.00	0.44	19.80
875.00	0.34	22.25
900.00	0.37	25.70
1000.00	0.41	19.94
1100.00	0.71	12.88
1200.00	1.13	9.11


Config. G



TCL1-11G2+
INSERTION LOSS

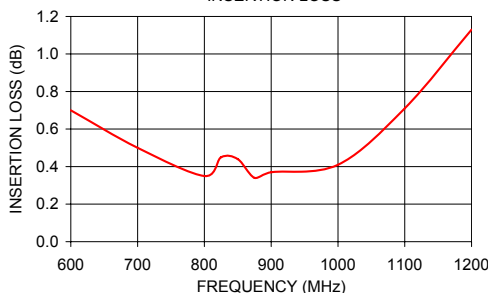

TCL1-11G2+
INPUT RETURN LOSS

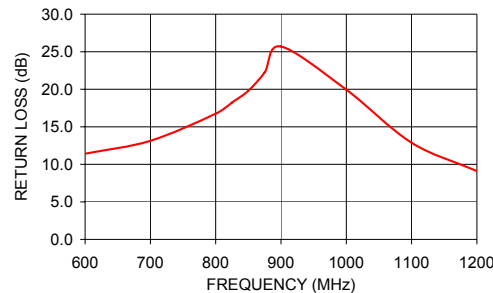

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

