COAXIAL

Termination

TERM-5W-183S+

50Ω DC to 18 GHz SMA-Male

KEY FEATURES

- Wideband Operation, DC to 18 GHz
- Input Power Handling, 5 W
- Excellent VSWR, 1.08:1 Typ.
- Rugged Construction

Generic photo used for illustration purposes only

APPLICATIONS

- Cellular Communications
- Satellite Communications
- Test Set-up
- Defense & Radar

PRODUCT OVERVIEW

Mini-Circuits' TERM-5W-183S+ is a wideband 50Ω high power termination capable of absorbing signals up to 5 W from DC to 18 GHz. It provides excellent return loss across its entire operating frequency range, effectively dissipating signal power with minimal reflections. This model has an SMA-Male connector, allowing connection to an SMA-Female connector. The unit features rugged construction for a long life and comes in a Passivated Stainless-Steel housing.

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range	-	DC	-	18	GHz
VSWR	DC - 10	-	1.05	1.30	:1
	10 - 18	-	1.12	1.33	

ABSOLUTE MAXIMUM RATINGS[1]

Operating Case Temperature	-45° C to +125° C
Storage Temperature	-45° C to +125° C
Input Power[2]	5 W

1. Permanent damage may occur if any of these limits are exceeded.
2. At +25°C derate linearly to 0.5 W at 125°C.

REV. A
ECO-027525
TERM-5W-183S+
MCL NY
250616

TYPICAL PERFORMANCE GRAPHS

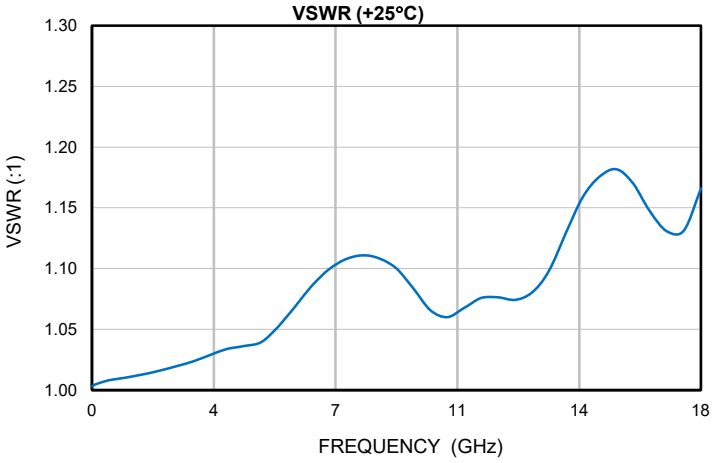

Termination

TERM-5W-183S+

50Ω DC to 18 GHz SMA-Male

CONNECTOR SPECIFICATIONS

Description	Connector
Connector Type	SMA-Male
Orientation	Straight

OUTLINE DRAWING

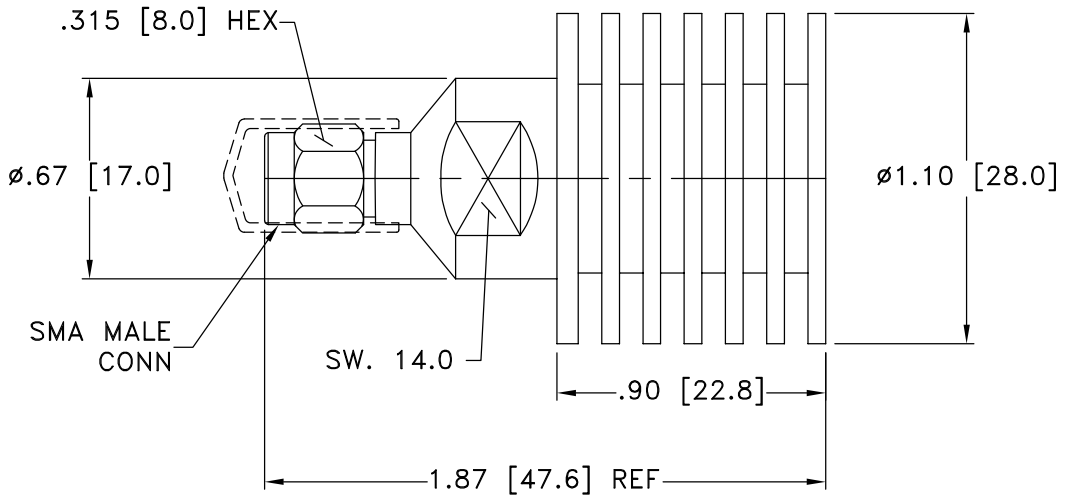

Weight: 51.5 grams MAX
Dimensions are in inches [mm]. Tolerances: 2 Pl.±.03; 3 Pl. ± .015 inches

PRODUCT MARKING*: TERM-5W-183S+

*Marking may contain other features or characters for internal lot control.

Termination

TERM-5W-183S+

50Ω DC to 18 GHz SMA-Male

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD CLICK HERE

Performance Data & Graphs	Data Graphs S-Parameter (S1P Files) Data Set (.zip file)
Case Style	LL3724
RoHS Status	Compliant
Environmental Ratings	ENV151

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html