



USB &amp; DAISY CHAIN

# Solid-State Switch

**USB-4SP2T-852H**

Mini-Circuits

50Ω 10 to 8500 MHz 4 x SPDT SMA Female

## THE BIG DEAL

- 4 x solid-state SPDT absorptive switches
- High-speed switch transition, 5  $\mu$ s
- Very high isolation, 60 dB
- High power handling, +30 dBm max
- Daisy-chain control of up to 35 modules

## APPLICATIONS

- High volume production testing / ATE
- 5G FR1, WiFi 6E, Bluetooth testing
- Design verification testing
- RF signal routing / switch matrices



Generic photo used for illustration purposes only

## PRODUCT OVERVIEW

Mini-Circuits' USB-4SP2T-852H is a low cost, USB controlled, solid state matrix, containing four independent SPDT RF switches. Each fast switching, absorptive switch operates from 10 MHz to 8500 MHz with 5  $\mu$ s typical switch transition speed. High linearity (+50 dBm typ IP3), and high isolation (60 dB typical) allow the model to be used for a wide variety of RF applications.

The USB-4SP2T-852H is housed in a compact, low profile, rugged metal case (8.4" x 2.00" x 0.475") with 12 SMA (F) connectors (COM, 1 & 2 for each switch), a USB Mini-B port for power and control, and two data bus connectors for Master / Slave connections to other modules.

Full software support is provided, including our user-friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments (both 32-bit and 64-bit systems).

## KEY FEATURES

| Feature                           | Advantages  |
|-----------------------------------|---|
| Four RF SPDT absorptive switches  | Wideband (10 to 8500 MHz) with low insertion loss (3 dB typ.), high isolation (60 dB typ), and high power rating (+30 dBm through path).  |
| High Linearity (IP3 +50 dBm typ.) | Excellent intermodulation performance, meeting requirements for digital communications signals.   |
| Internal DC Blocking capacitors   | No need for external DC blocking circuitry  |
| Dynamic daisy-chain control       | Simplify control software and interconnections by cascading up to 35 modules of multiple switch types into a Master / Slave chain with a single USB interface.  |
| Full software support             | User friendly Windows GUI (graphical user interface) allows manual control straight out of the box, while the comprehensive API (application programming interface) with examples and instructions allows easy automation in most programming environments. |

**Trademarks:**

Windows is a registered trademark of Microsoft Corporation in the United States and other countries ; Linux is a registered trademark of Linus Torvalds ; Pentium is a registered trademark of Intel Corporation. Neither Mini-Circuits nor the Mini-Circuits products are affiliated with or endorsed by the owners of the referenced trademarks. Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation.

Rev. A  
ECO-025516  
EDR-11936  
USB-4SP2T-852H  
MCIL  
250512  
PAGE 1 OF 11

**Mini-Circuits**

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com



USB &amp; DAISY CHAIN

# Solid-State Switch

**USB-4SP2T-852H**

Mini-Circuits

50Ω 10 to 8500 MHz 4 x SPDT SMA Female

**ELECTRICAL SPECIFICATIONS AT -10 TO +60°C**

| Parameter       | Ports   | Condition (MHz) | Min. | Typ. | Max. | Unit |
|-----------------|---|-----------------|------|------|------|------|
| Frequency range | -   | -               | 10   | -    | 8500 | MHz  |
| Insertion loss  | COM to any active port                              | 10 - 700        | -    | 1.6  | 2.8  | dB   |
|                 |   | 700 - 2500      | -    | 2.0  | 3.2  |      |
|                 |   | 2500 - 5000     | -    | 2.8  | 4.0  |      |
|                 |   | 5000 - 6000     | -    | 3.0  | 4.2  |      |
|                 |   | 6000 - 7200     | -    | 3.0  | 4.5  |      |
|                 |   | 7200 - 8000     | -    | 3.4  | 4.8  |      |
|                 |   | 8000 - 8500     | -    | 3.6  | 5.0  |      |
| Isolation       | Between ports 1 to 2<br>(of any given switch)       | 10 - 700        | 82   | 100  | -    | dB   |
|                 |   | 700 - 2500      | 67   | 82   | -    |      |
|                 |   | 2500 - 5000     | 55   | 65   | -    |      |
|                 |   | 5000 - 6000     | 50   | 61   | -    |      |
|                 |   | 6000 - 8500     | 45   | 52   | -    |      |
|                 | COM to any terminated port<br>(of any given switch) | 10 - 700        | 85   | 100  | -    | dB   |
|                 |   | 700 - 2500      | 70   | 85   | -    |      |
|                 |   | 2500 - 5000     | 58   | 70   | -    |      |
|                 |   | 5000 - 6000     | 52   | 63   | -    |      |
|                 |   | 6000 - 8500     | 45   | 54   | -    |      |
|                 | Crosstalk between switches                          | 10 - 8500       | 65   | 100  | -    |      |
| Return loss     | COM port  | 10 - 6000       | -    | 19.0 | -    | dB   |
|                 |   | 6000 - 7200     | -    | 18.0 | -    |      |
|                 |   | 7200 - 8000     | -    | 15.0 | -    |      |
|                 |   | 8000 - 8500     | -    | 12.5 | -    |      |
|                 | Any port connected to COM                           | 10 - 6000       | -    | 19.0 | -    | dB   |
|                 |   | 6000 - 7200     | -    | 18.0 | -    |      |
|                 |   | 7200 - 8000     | -    | 15.0 | -    |      |
|                 |   | 8000 - 8500     | -    | 12.5 | -    |      |
|                 | Any terminated port                                 | 10 - 2500       | -    | 23.0 | -    | dB   |
|                 |   | 2500 - 5000     | -    | 21.0 | -    |      |
|                 |   | 5000 - 6000     | -    | 18.0 | -    |      |
|                 |   | 6000 - 7200     | -    | 18.0 | -    |      |
|                 |   | 7200 - 8000     | -    | 17.0 | -    |      |
|                 |   | 8000 - 8500     | -    | 13.0 | -    |      |

**Mini-Circuits®**

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 11



USB &amp; DAISY CHAIN

## Solid-State Switch

USB-4SP2T-852H

Mini-Circuits

50Ω 10 to 8500 MHz 4 x SPDT SMA Female

## ELECTRICAL SPECIFICATIONS AT -10 TO +60°C (CONTINUED)

| Parameter                                     | Ports                                      | Condition (MHz)           |           | Min. | Typ. | Max.   | Unit            |
|---|--|---------------------------|-----------|------|------|--------|-----------------|
| Power input @1 dB compression <sup>1, 2</sup> | COM to any active port                     | 100 - 8500                |           | -    | +38  | -      | dBm             |
| IP3 <sup>2, 3</sup>                           | COM to any active port                     | 100 - 8500                |           | -    | +50  | -      | dBm             |
| Transition time <sup>4</sup>                  | -  | -                         |           | -    | 200  | 300    | ns              |
| Minimum dwell time <sup>5</sup>               | High-speed mode                            | -                         |           | -    | 25   | -      | μs              |
| Switching time (USB) <sup>6</sup>             | -  | -                         |           | -    | 2    | -      | ms              |
| Supply voltage (Vcc)                          | USB port                                   | -                         |           | 4.75 | 5    | 5.25   | V <sub>DC</sub> |
| Supply current (Icc)                          |  | -                         |           | -    | 55   | 85     | mA              |
| Operating RF input power <sup>7</sup>         | Per port (COM & 1 - 2)                     | Hot switching             | 10 - 8500 | -    | -    | +24    | dBm             |
|   | Total on any through path (bi-directional) | Cold switching            | 10 - 40   | -    | -    | Note 1 |                 |
|   |  |                           | 40 - 6000 | -    | -    | +30    |                 |
|   |  |                           | 6000-8500 | -    | -    | +29    |                 |
|   | Per terminated port (1 - 2)                | Into internal termination | 10 - 8500 | -    | -    | +24    |                 |

1. Max power at through path derates linearly from +30 dBm @ 40 MHz to +25 dBm @ 10 MHz.

2. Compression and IP3 may degrade below 100 MHz.

3. IP3 tested with 1 MHz span between signals, +5 dBm per tone.

4. Transition time spec represents the time that the RF signal paths are interrupted during switching and thus is specified without communication delays.

5. Minimum dwell time is the shortest time that can be achieved between 2 switch transitions when programming an automated switch sequence.

6. Switching time(USB) is the time from issuing a single software command via USB to the switch state changing. The most significant factor is the host PC, influenced by CPU load and USB protocol. The time shown is an estimate for a medium CPU load and USB 2.0 connection.

7. The switch can tolerate the max cold switching power on the active path simultaneously with the max internal termination power on every terminated port.

ABSOLUTE MAXIMUM RATINGS <sup>8</sup>

|   |                |
|---|----------------|
| Operating Temperature                           | -10°C to +60°C |
| Storage Temperature                             | -20°C to +85°C |
| DC Supply Voltage max @ USB and pin #6 of D-Sub | 6 V            |
| DC Voltage @ RF Ports                           | 16 V           |

8. Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

 Mini-Circuits®



USB & DAISY CHAIN

# Solid-State Switch

**USB-4SP2T-852H**

50Ω

10 to 8500 MHz


4 x SPDT

SMA Female


Mini-Circuits

## TYPICAL PERFORMANCE GRAPHS


Insertion Loss over Temperature (1 Active)

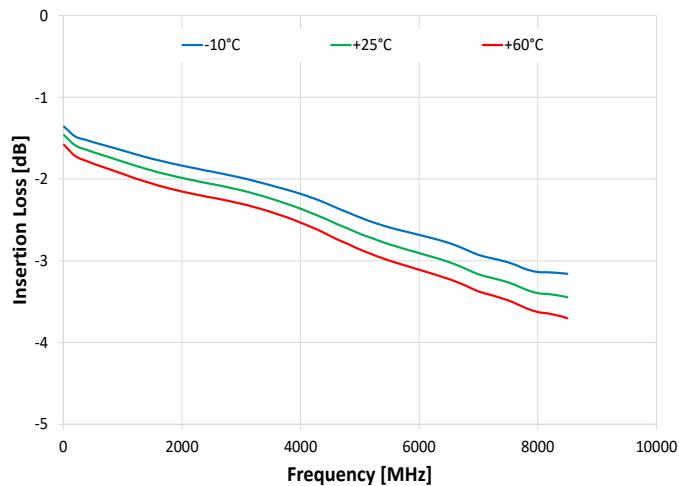


Insertion Loss 1 - 2 Active

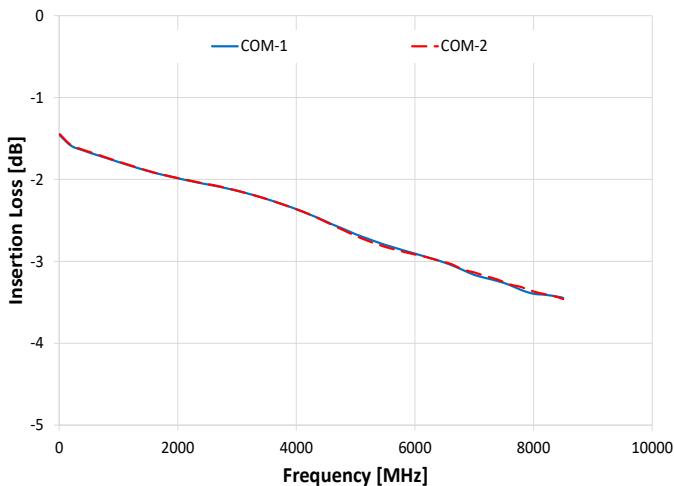


Isolation Com to 1 (2 Active)

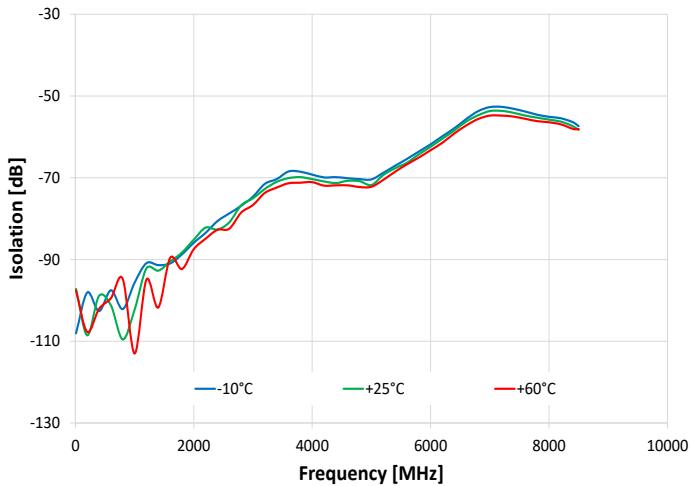


Isolation Com to 2 (1 Active)

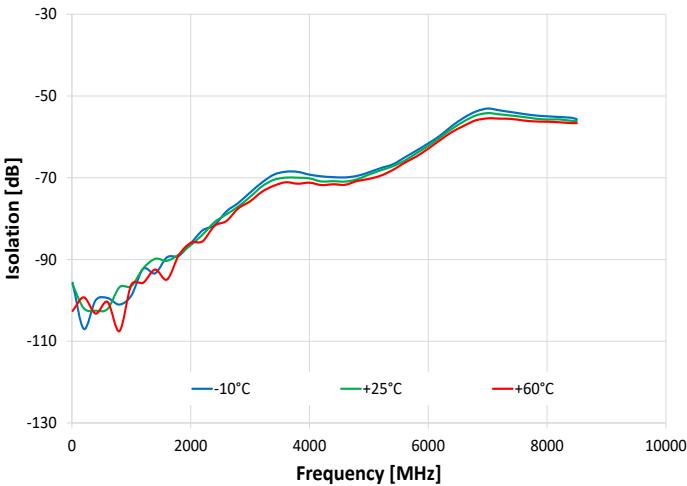

Isolation 1 to 2 (1 Active)

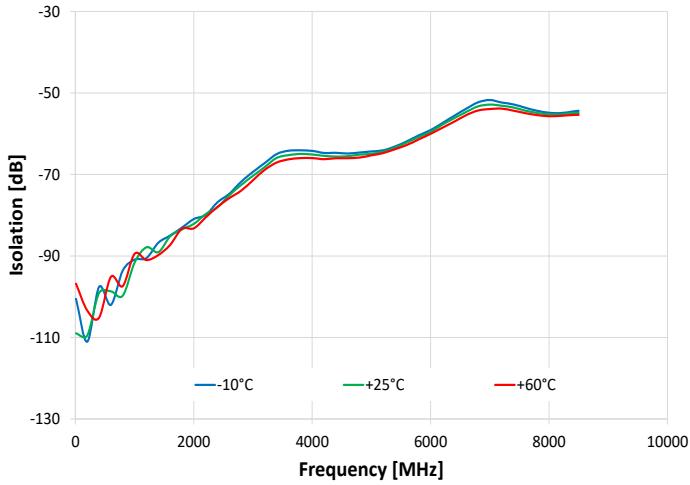

Crossover @ Active states

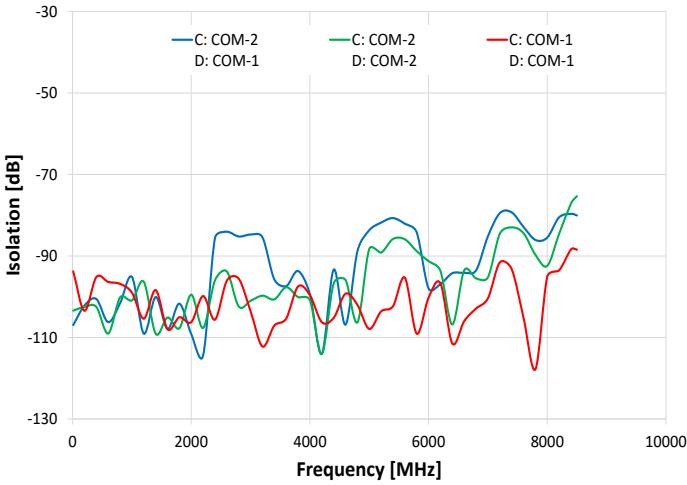

**Mini-Circuits®**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 4 OF 11



USB & DAISY CHAIN

# Solid-State Switch

**USB-4SP2T-852H**

50Ω

10 to 8500 MHz


4 x SPDT

SMA Female


Mini-Circuits

## TYPICAL PERFORMANCE GRAPHS (CONTINUED)


Return Loss @ COM over Temperature (1 Active)

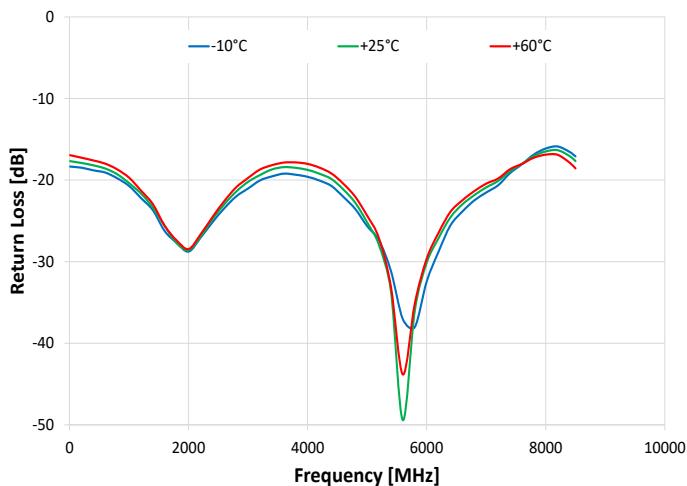


Return Loss @ 1 over Temperature (1 Active)

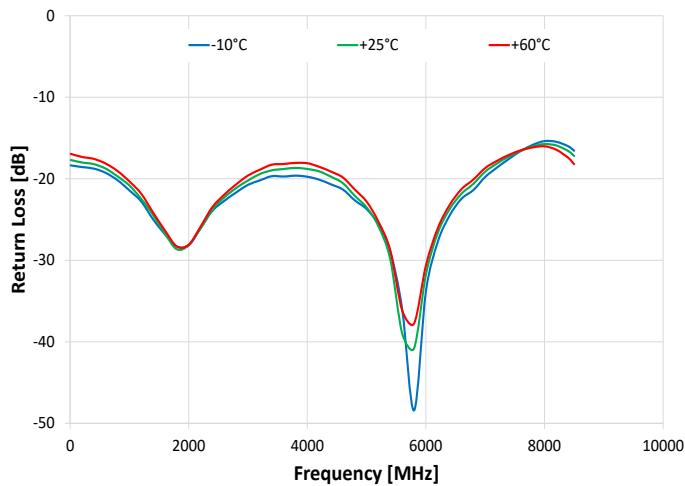


Return Loss @ 1 over Temperature (1 Terminated)

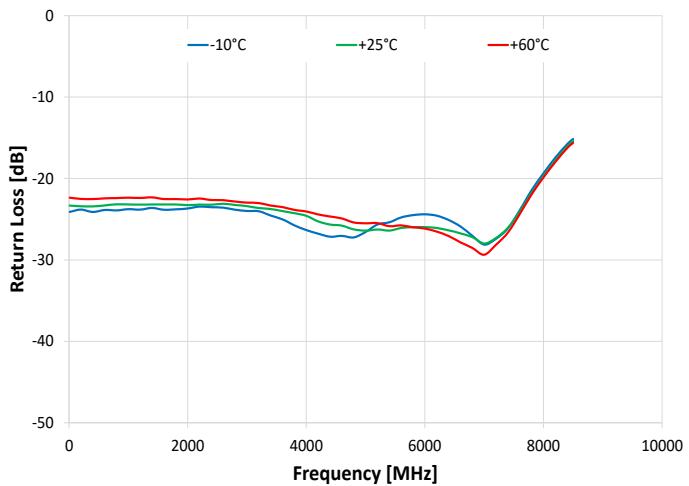

Return Loss @ 2 over Temperature (2 Active)

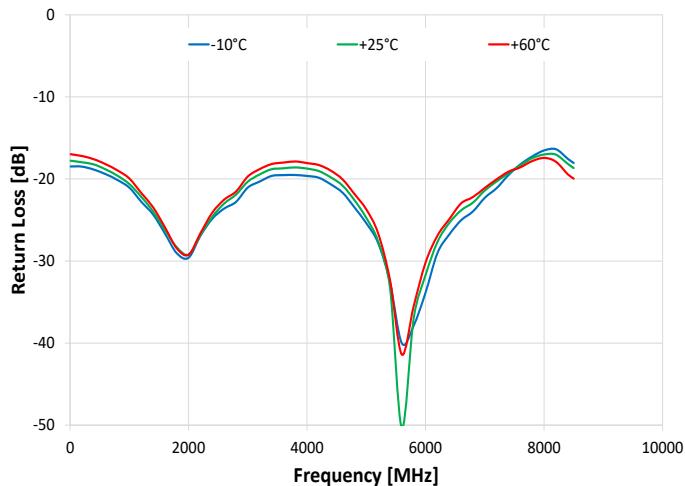

Return Loss @ 2 over Temperature (2 Terminated)

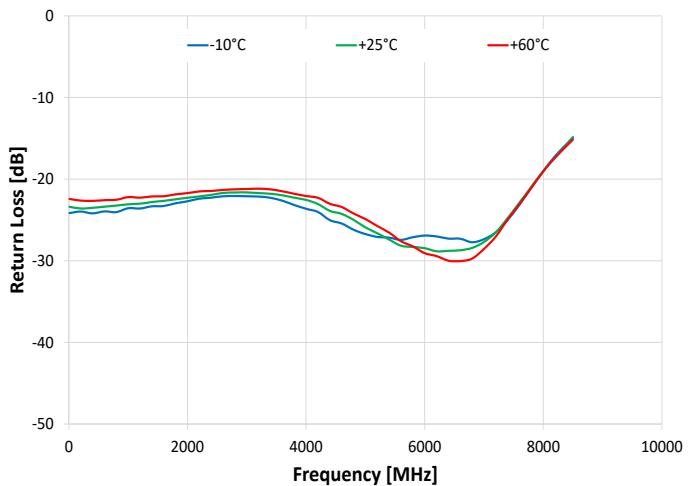

**Mini-Circuits®**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 5 OF 11



USB &amp; DAISY CHAIN

# Solid-State Switch

USB-4SP2T-852H

Mini-Circuits

50Ω 10 to 8500 MHz 4 x SPDT SMA Female

## CONTROL INTERFACES

|             |                                     |   |
|-------------|-------------------------------------|---|
| USB control | Supported protocols                 | HID (Human Interface Device) - Full-speed |
|             | Min communication time <sup>9</sup> | 3 ms typ (full transmit/receive cycle)    |

9. USB min communication time is based on the polling interval of the USB HID protocol (1 ms polling interval, 64 bytes per packet), medium CPU load and no other high speed USB devices using the USB bus.

## SOFTWARE & DOCUMENTATION

Mini-Circuits' full software and support package including user guide, Windows GUI, API, programming manual and examples can be downloaded free of charge (refer to the last page for the download path).

A comprehensive set of software control options is provided:

- GUI for Windows – Simple software interface for control via Ethernet and USB.
- Programming / automation via USB:
  - DLL files provide a full API for Windows with a set of intuitive functions which can be implemented in any programming environment supporting .Net Framework or ActiveX.
  - Direct USB programming is possible in any other environment (not supporting .Net or ActiveX).

Please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com) for support.

## MINIMUM SYSTEM REQUIREMENTS

|                                |   |
|--------------------------------|---|
| GUI                            | Windows 7 or later  |
| USB API DLL                    | Windows 7 or later and programming environment with ActiveX or .NET support |
| USB Direct Programming         | Linux, Windows 7 or later   |
| Daisy-chain dynamic addressing | An additional Mini-Circuits model supporting dynamic addressing             |
| Hardware                       | Intel i3 (or equivalent) or later   |



USB &amp; DAISY CHAIN

# Solid-State Switch


**USB-4SP2T-852H**

Mini-Circuits


50Ω 10 to 8500 MHz 4 x SPDT SMA Female

**GRAPHICAL USER INTERFACE (GUI) FOR WINDOWS - KEY FEATURES**

- Connect via USB
- Run GUI in "demo mode" to evaluate software without a hardware connection

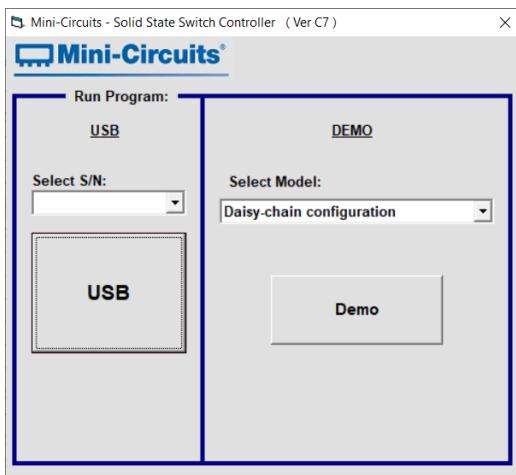

- View and set switch states at the click of a button
- Configure and run timed switching sequences

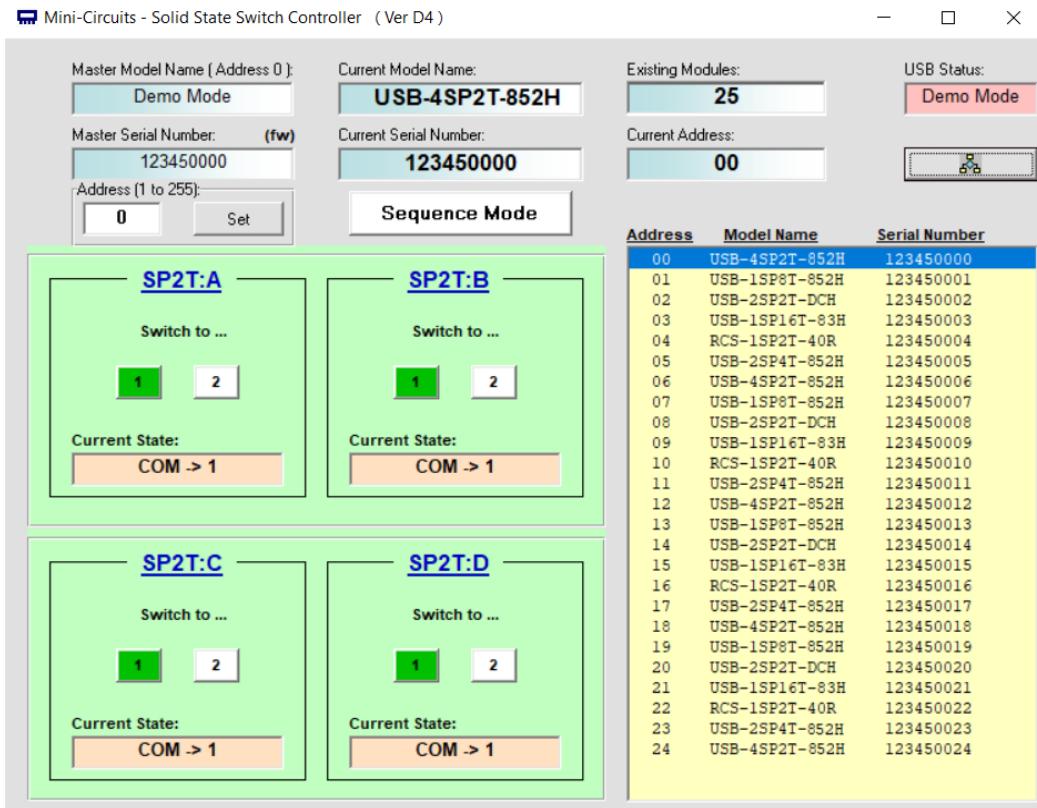**Mini-Circuits®**



USB & DAISY CHAIN

# Solid-State Switch


**USB-4SP2T-852H**

Mini-Circuits

50Ω 10 to 8500 MHz 4 x SPDT SMA Female

## CONNECTING MULTIPLE MODULES (DAISY CHAIN)

The model is designed to connect up to 35 modules in series (daisy chain) using dynamic addressing, meaning there is no need to specifically set the address of the modules. The addresses will be set automatically as part of establishing the communications with the computer. The module connected to the computer's USB port will be assigned address 0 (master), the first module connected to it will get address 1 (slave) and subsequent modules incrementing up to address 34 (slave).

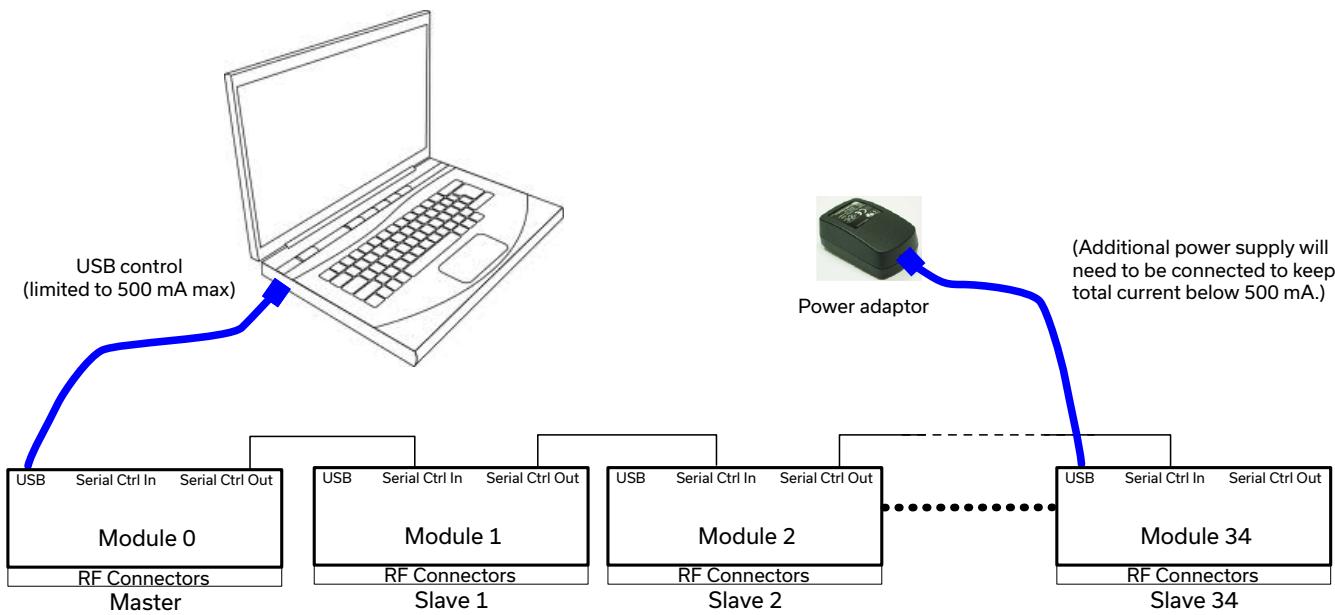

Connections between modules will be made using the serial in/out ports with the module connected to the PC act as a master and all other as slave modules. All control will be through the master module (address 0) which is the only one communicating with the PC. Serial control out port of each module should be connected to the serial control in port of the next module.

Power will be supplied from the PC via the master module up to a maximum of 500 mA. Generally, additional power supply will be needed to keep total current below 500 mA. All power supplies should be connected to the module via the module's USB port. Connecting an additional power supply will automatically cut off power draw from the serial control in port for that module.

The serial master/slave bus allows connecting modules of different types to the same daisy chain as long as all support Mini-Circuits Dynamic addressing setup. To add a new module to the setup, simply connect the module and refresh the address listing, no need to reset any of the existing modules or assign addresses manually.

**Note:** Different module types may have different current consumption which will change the number of units which can be connected before an additional power supply is needed. For example, if connecting units with a current consumption of 100 mA each, additional power supply is recommended every sixth module. If using units with current consumption of 50 mA additional power supply is recommended every eleventh module.



USB &amp; DAISY CHAIN

# Solid-State Switch


**USB-4SP2T-852H**

50Ω

10 to 8500 MHz

4 x SPDT

SMA Female

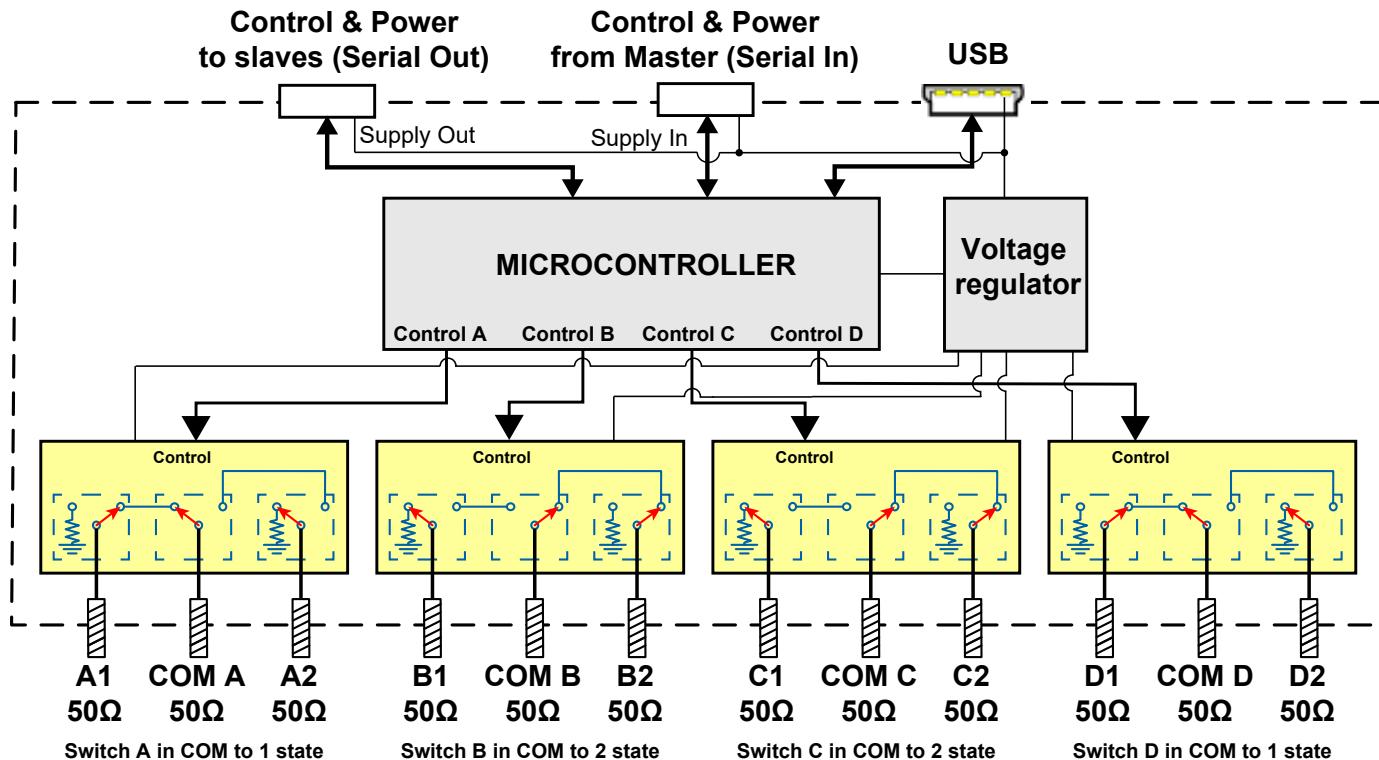**BLOCK DIAGRAM****SWITCH STATE TABLE (EACH SWITCH)**

| State | Switch path |
|-------|-------------|
| 1     | Com to 1    |
| 2     | Com to 2    |

**CONNECTIONS**

| Port name                           | Connector type                           |
|-------------------------------------|--|
| RF ports switch A (COM, 1 & 2)      | SMA female                               |
| RF ports switch B (COM, 1 & 2)      | SMA female                               |
| RF ports switch C (COM, 1 & 2)      | SMA female                               |
| RF ports switch D (COM, 1 & 2)      | SMA female                               |
| USB                                 | USB type Mini-B receptacle               |
| Serial in (digital control 2 port)  | Digital snap fit connector <sup>10</sup> |
| Serial out (digital control 1 port) | Digital snap fit connector <sup>10</sup> |

10. Mating connector is Hirose ST40X-10S-CV(30).



USB &amp; DAISY CHAIN


## Solid-State Switch

USB-4SP2T-852H

Mini-Circuits

50Ω 10 to 8500 MHz 4 x SPDT SMA Female

## CASE STYLE DRAWING (QM2279)

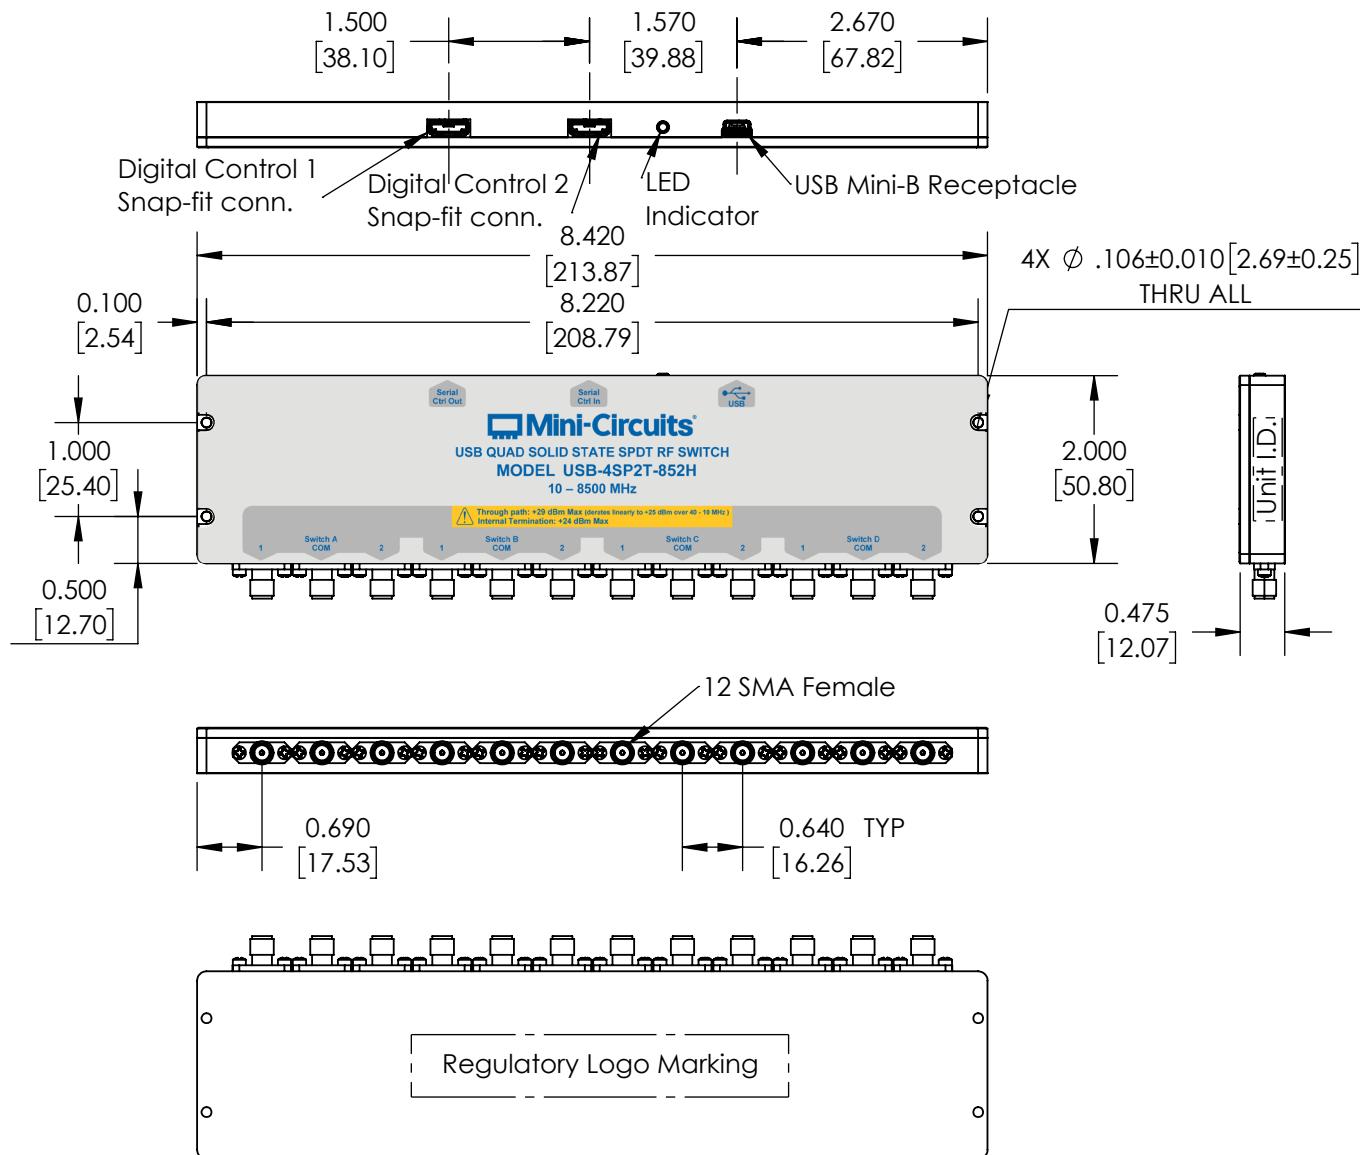

## NOTES:

1. Case material: Aluminum alloy.
2. Case Finish: Nickel Plate.
3. Dimensions: Inches [mm]. Tolerances 2 Pl.  $\pm .03$  inch; 3 Pl.  $\pm .015$  inch.
4. Weight: 450 grams
5. Marking may contain other features or characters for internal lot control.

Mini-Circuits®



USB &amp; DAISY CHAIN

# Solid-State Switch

USB-4SP2T-852H

50Ω 10 to 8500 MHz 4 x SPDT SMA Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE

[CLICK HERE](#)

|                           |   |   |
|---------------------------|---|---|
| Performance Data & Graphs | Data Graphs   |   |
| Case Style                | QM2279  |   |
| Environmental Rating      | ENV55T2   |   |
| User Guide                | <a href="https://www.minicircuits.com/softwaredownload/solidstate.html">https://www.minicircuits.com/softwaredownload/solidstate.html</a> |   |
| Regulatory Compliance     | Refer to user guide for compliance information<br>  | <a href="https://www.minicircuits.com/app/AN49-012.pdf">https://www.minicircuits.com/app/AN49-012.pdf</a> |
| Support                   | <a href="mailto:testsolutions@minicircuits.com">testsolutions@minicircuits.com</a>  |   |

## INCLUDED ACCESSORIES <sup>11</sup>

|  | Part No.    | Description   | Qty. |
|--|-------------|---|------|
|  | MUSB-CBL-3+ | 3.3 ft (1.0 m) USB Cable: USB type A (Male) to USB type Mini-B (Male) | 1    |

11. Additional quantities are available for purchase as optional accessories.

## OPTIONAL ACCESSORIES

|  | Part No.       | Description  |
|--|----------------|--|
|  | MUSB-CBL-7+    | 6.6 ft (2.0 m) USB Cable: USB type A (Male) to USB type Mini-B (Male)                  |
|  | CBL-1.5FT-MMD+ | 1.5 ft (0.45 m) Cable assembly for serial control daisy chain with snap fit connectors |
|  | USB-AC/DC-5+   | AC/DC +5V power adaptor with USB connector <sup>12,13</sup>                            |

12. The power adaptor may be used to provide additional power via USB port when connecting several units in daisy chain control.

13. Includes power plugs for US, UK, EU, IL, AU & China. Plugs for other countries are also available. If you need a power cord for a country not listed, please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com)

### NOTES:

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at <https://www.minicircuits.com/terms/viewterm.html>