

Coaxial Power Splitter/Combiner

ZFSC-8-4-75+

8 Way-0° 75Ω 5 to 1000 MHz



Generic photo used for illustration purposes only
CASE STYLE: R29

Connectors Model
BNC ZFSC-8-4-75+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.62W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S(COM)
PORT 1,2,3,4,5,6,7,8	1,2,3,4,5,6,7,8

Outline Drawing

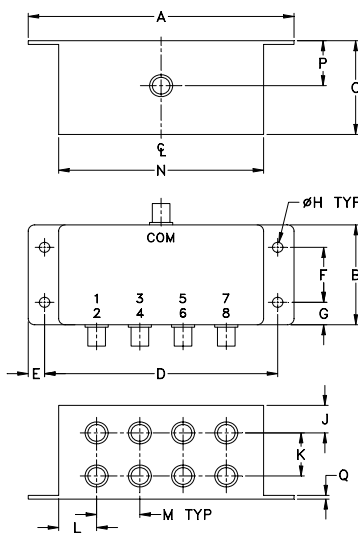

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
4.06	1.60	1.57	3.56	.24	.88	.36	.160
103.12	40.64	39.88	90.42	6.10	22.35	9.14	4.06
J	K	L	M	N	P	Q	wt.
.43	.69	.58	.66	3.13	.79	.13	grams
10.92	17.53	14.73	16.76	79.50	20.07	3.30	200

Features

- wideband, 5 to 1000 MHz
- low insertion loss, 0.6 dB typ.
- good isolation, 25 dB typ.
- rugged shielded case

Applications

- VHF/UHF
- cellular
- CATV
- communication systems

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 9.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
f_L - f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
5-1000	35	20	25	16	20	15	0.4	1.0	0.6	1.6	1.6	2.7	2.0	7.0	13	0.3	0.5	1.2

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]


Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)						Amplitude Unbalance (dB)	Isolation (dB)				VSWR S	VSWR 1	VSWR 8
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	1-7	3-4	5-7			
5.00	9.33	9.33	9.41	9.33	9.33	9.40	0.09	34.01	37.83	49.28	52.87	1.98	1.24	1.24
13.00	9.33	9.33	9.40	9.33	9.33	9.39	0.08	34.62	39.35	52.07	53.37	1.94	1.21	1.22
35.00	9.41	9.40	9.45	9.41	9.41	9.43	0.05	34.58	38.92	48.20	49.83	1.70	1.22	1.22
50.00	9.44	9.42	9.46	9.43	9.44	9.44	0.04	34.34	38.52	45.84	47.34	1.57	1.22	1.22
140.00	9.53	9.53	9.53	9.54	9.54	9.51	0.03	32.07	37.60	38.67	39.66	1.23	1.21	1.22
230.00	9.60	9.60	9.59	9.60	9.61	9.57	0.03	29.78	37.19	35.69	36.64	1.13	1.19	1.20
320.00	9.62	9.63	9.62	9.64	9.64	9.61	0.05	27.89	36.88	34.40	35.34	1.09	1.17	1.18
410.00	9.65	9.66	9.65	9.68	9.69	9.66	0.07	26.35	36.40	34.04	34.98	1.10	1.15	1.17
500.00	9.73	9.75	9.73	9.77	9.79	9.75	0.11	25.17	35.55	34.72	35.43	1.16	1.15	1.17
640.00	9.89	9.94	9.91	9.97	10.00	9.95	0.19	24.02	33.55	38.85	39.00	1.24	1.18	1.21
780.00	10.08	10.15	10.11	10.21	10.25	10.16	0.28	23.49	31.29	36.88	39.95	1.29	1.23	1.25
880.00	10.25	10.35	10.29	10.42	10.49	10.37	0.37	22.89	30.19	31.35	34.36	1.26	1.24	1.27
940.00	10.37	10.48	10.41	10.55	10.63	10.52	0.42	22.21	29.74	29.21	32.21	1.23	1.24	1.28
970.00	10.42	10.54	10.45	10.61	10.71	10.60	0.44	21.78	29.54	28.36	31.31	1.22	1.24	1.28
1000.00	10.51	10.63	10.55	10.71	10.83	10.71	0.49	21.33	29.44	27.66	30.65	1.23	1.24	1.28


ZFSC-8-4-75+ 1. Total Loss = Insertion Loss + 9dB splitter loss.

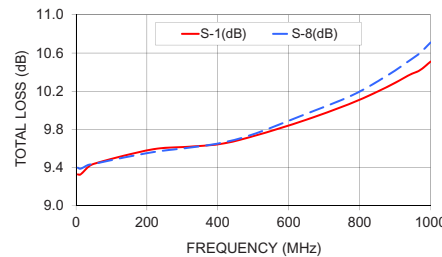


ZFSC-8-4-75+ ISOLATION

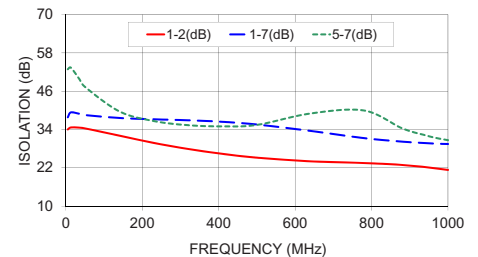

ZFSC-8-4-75+ VSWR

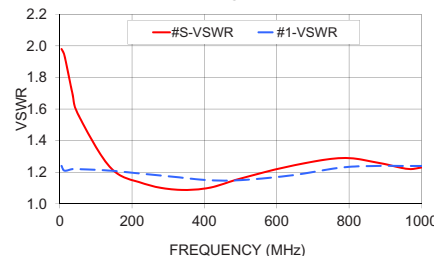

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

