

Coaxial Directional Coupler

50Ω 5 to 1000 MHz

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Coaxial Connections

INPUT	1
OUTPUT	2
COUPLED	3

Features

- very flat coupling
- very broad, multi-octave
- all welded construction
- protected by U.S. Patents 6,140,887 & 6,784,521 & 6,790,049

Applications

- VHF/UHF
- communications receivers & transmitters
- cellular
- instrumentation

ZX30-12-4+
ZX30-12-4



CASE STYLE: FL905

Connectors	Model	Price	Qty.
SMA	ZX30-12-4-S(+)	\$29.95 ea.	(1-24)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Directional Coupler Electrical Specifications ($T_{AMB} = 25^{\circ}\text{C}$)

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
	f _i -f _u	Nom.	Typ. Flatness	L		M		U		L		M		U		L	MU
			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.
5-1000	12.0±0.5	±0.3	0.7	1.0	0.85	1.0	0.9	1.2	35	28	25	20	20	13	1.15	0.5	1.0

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

1. Mainline loss includes theoretical power loss at coupled port.

Outline Drawing



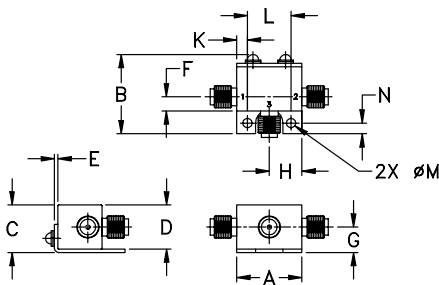


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37
H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	0.71	11.86	35.40	22.64	33.41	20.06
8.00	0.69	11.83	36.14	23.06	36.92	20.62
10.00	0.68	11.82	36.32	23.20	38.67	20.80
50.00	0.69	11.83	36.87	23.58	54.57	21.25
100.00	0.69	11.85	37.20	23.75	54.41	21.28
200.00	0.71	11.88	36.97	24.03	42.79	21.20
400.00	0.74	11.94	29.96	24.56	33.53	20.33
600.00	0.80	12.02	23.72	24.68	28.55	18.76
800.00	0.89	12.15	19.26	24.44	24.79	16.99
1000.00	1.02	12.37	16.05	23.85	22.08	15.31

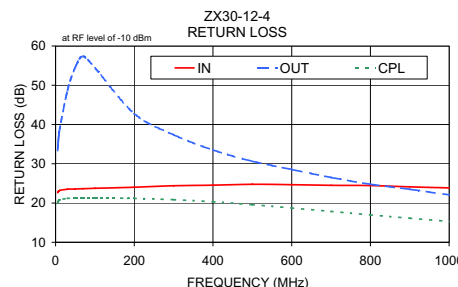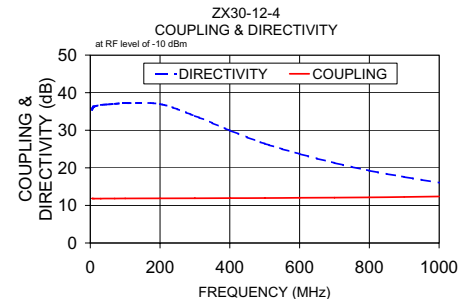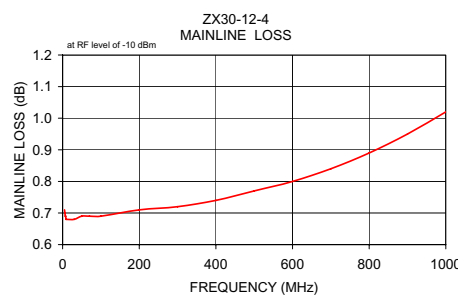

electrical schematic

