



MMIC SURFACE MOUNT

Wideband Amplifier

AVA-183MP+

50Ω 0.05 to 18 GHz High Dynamic Range Low Noise

THE BIG DEAL

- Ultra wideband, 0.05-18 GHz
- High Dynamic Range
 - P1dB, Typ. +24 dBm
 - Gain, Typ. 16 dB
 - Low Noise Figure, Typ. 1.8 dB
- High OIP3, Typ. +31 dBm
- 4x4mm 20-Lead QFN-Style Package

APPLICATIONS


- 5G MIMO and Back Haul Radio Systems
- Satellite Communications
- Test and Measurement Equipment
- Radar, EW, and ECM Defense Systems

PRODUCT OVERVIEW

AVA-183MP+ is a GaAs pHEMT MMIC wideband distributed amplifier operating from 0.05 to 18 GHz. The amplifier provides 16.5 dB of Gain, +24 dBm P1dB, and +31 dBm OIP3, and 1.8 dB Noise Figure typical performance while operating from an +8V supply with 160mA current consumption. The AVA-183MP+ offers a leading combination of wide bandwidth, low noise figure, high linearity, and output power resulting in a 50Ω matched high dynamic range amplifier. The AVA-183MP+ performance characteristics are ideal for use in wideband Defense Systems and Test and Measurement Equipment. The amplifier is housed in an industry standard 4x4mm QFN-style package.


KEY FEATURES

Features	Advantages
Wideband: 0.05 to 18 GHz • Gain, Typ. 16 dB	Ideal for use in wideband Electronic Warfare and Test and Measurement transmit signal chains.
High Dynamic Range • P1dB, Typ. +24 dBm • OIP3, Typ. +31 dBm • NF, Typ. 1.8 dB	Suitable as a driver amplifier for wideband power amplifier signal chains.
Good Input and Output Return Loss	Internally matched to 50Ω, this eliminates the need for external matching components making the device easy to integrate.
4x4mm 20-Lead QFN-style package	Small footprint saves space in dense layouts while providing low inductance, repeatable transitions, and excellent thermal contact to the PCB.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

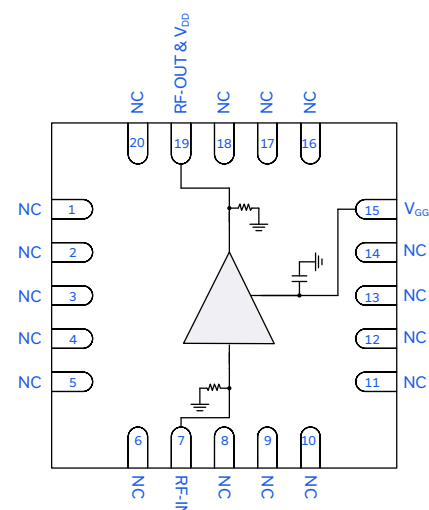



MMIC SURFACE MOUNT

Wideband Amplifier

AVA-183MP+

Mini-Circuits

50Ω 0.05 to 18 GHz High Dynamic Range Low Noise

ELECTRICAL SPECIFICATIONS¹ AT +25°C, $V_{DD} = +8V$, $I_{DD} = 160mA$, UNLESS NOTED OTHERWISE

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.05		18	GHz
Gain	0.05	20.0	20.6		dB
	5	15.7	16.2		
	10	15.9	16.5		
	15	15.5	16.3		
	18	15.2	16.3		
Input Return Loss	0.05		11.4		dB
	5		20.0		
	10		13.6		
	15		11.2		
	18		15.9		
Output Return Loss	0.05		14.3		dB
	5		20.0		
	10		20.0		
	15		20.0		
	18		19.3		
Isolation	0.05-18		43.0		dB
Output Power at 1 dB Compression (P1dB)	0.05		+25.8		dBm
	5		+24.2		
	10		+23.8		
	15		+24.4		
	18		+24.4		
Output Third-Order Intercept Point ($P_{OUT} = 0dBm/Tone$)	0.05		+32.7		dBm
	5		+32.2		
	10		+31.1		
	15		+29.3		
	18		+27.4		
Noise Figure	0.05		7.0		dB
	5		1.5		
	10		1.8		
	15		2.8		
	18		3.6		
Device Operating Voltage (V_{DD})		+7.75	+8	+8.25	V
Device Operating Current (I_{DD}) ²			160		mA
Gate Voltage (V_{GG}) ³			-1.3		V
Gate Current (I_{GG})			-0.5		μA
Device Current Variation Vs. Temperature ⁴			5.4		μA/°C
Device Current Variation Vs. Voltage ⁵			0.208		mA/mV







1. Tested in Mini-Circuits Characterization Test/Evaluation Board TB-AVA-183MPC+. See Figure 2. De-embedded to the device reference plane.

2. Current at $P_{IN} = -25$ dBm. Increases to 190 mA at P1dB.3. Typical Gate Voltage for when $I_{DD} = 160$ mA. V_{GG} must be adjusted so that $I_{DD} = 160$ mA.4. $((\text{Current at } T_{max}^{\circ}C - \text{Current at } T_{min}^{\circ}C)) / (T_{max}^{\circ}C - T_{min}^{\circ}C)$ 5. $(\text{Current at Nominal } V + \Delta V \text{ in mA}) - (\text{Current at Nominal } V - \Delta V \text{ in mA}) / (2\Delta V \text{ mV})$ 



TYPICAL PERFORMANCE GRAPHS





All data taken was at nominal conditions $V_{DD} = +8V$ and $I_{DD} = 160$ mA unless noted otherwise. For over temperature data, I_{DD} is adjusted to 160 mA at each temperature specified. For over current data, V_{DD} is set to +8V and V_{GG} is adjusted until each specified current level is achieved.

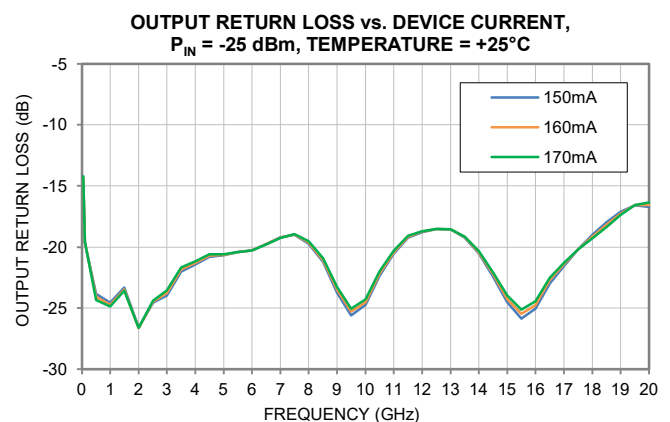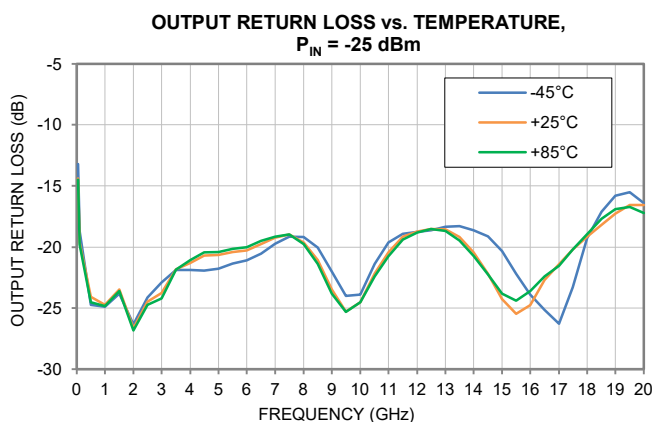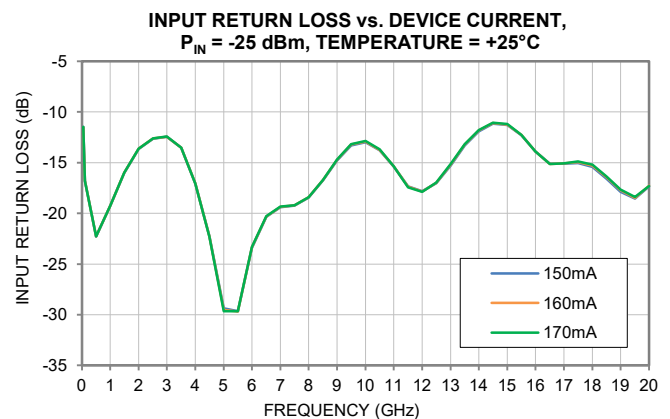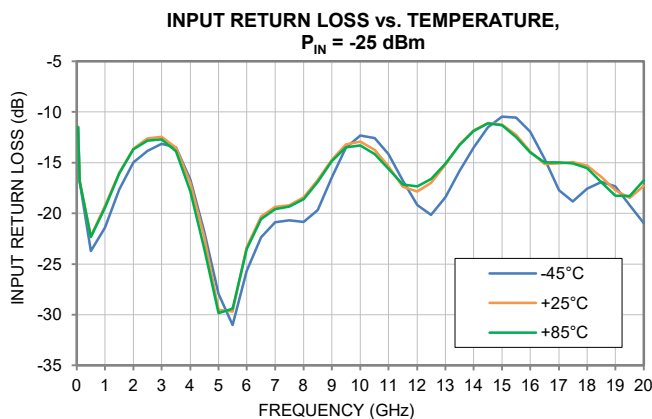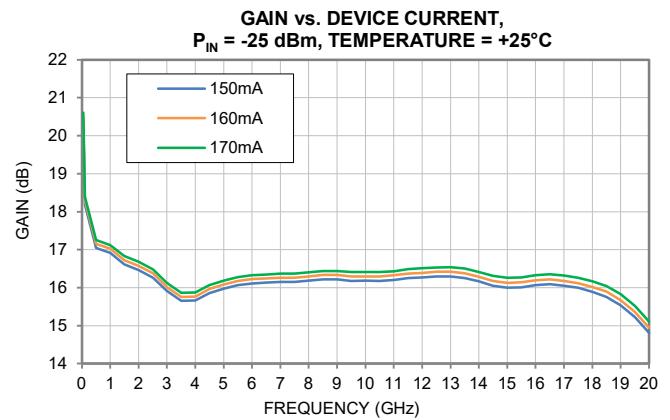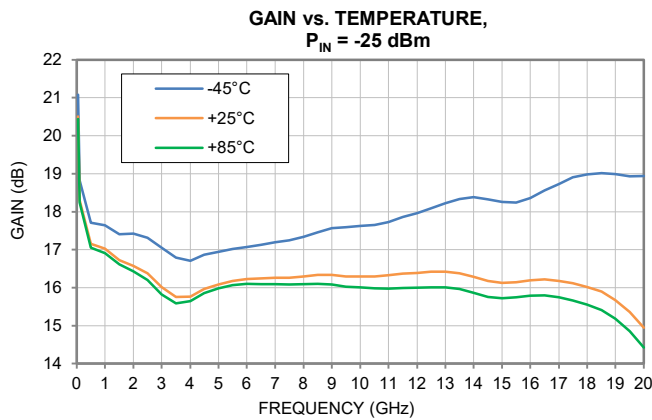





TYPICAL PERFORMANCE GRAPHS

All data taken was at nominal conditions $V_{DD} = +8V$ and $I_{DD} = 160$ mA unless noted otherwise. For over temperature data, I_{DD} is adjusted to 160 mA at each temperature specified. For over current data, V_{DD} is set to +8V and V_{GG} is adjusted until each specified current level is achieved.

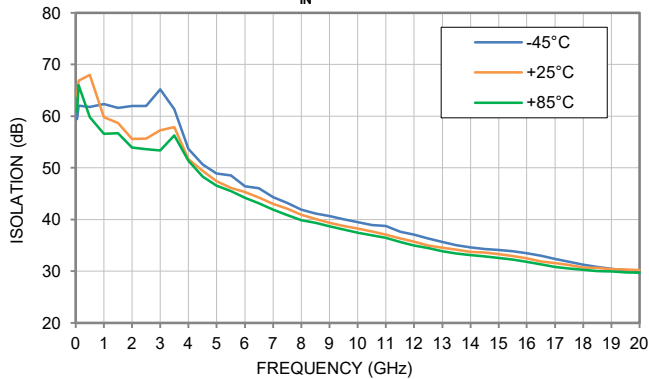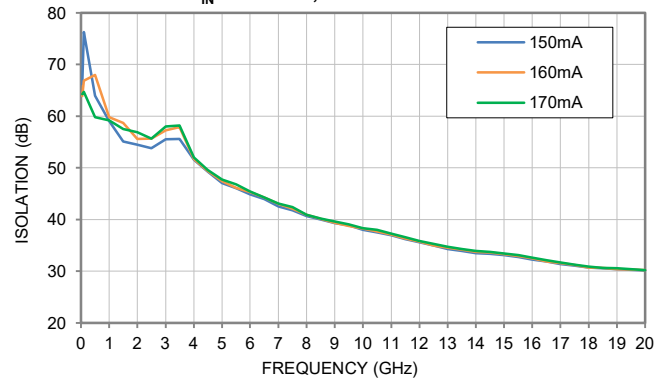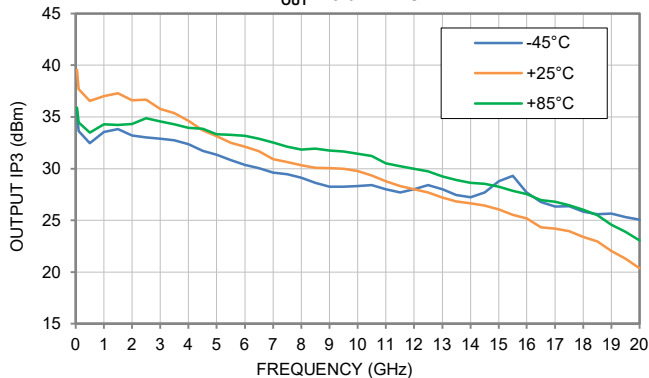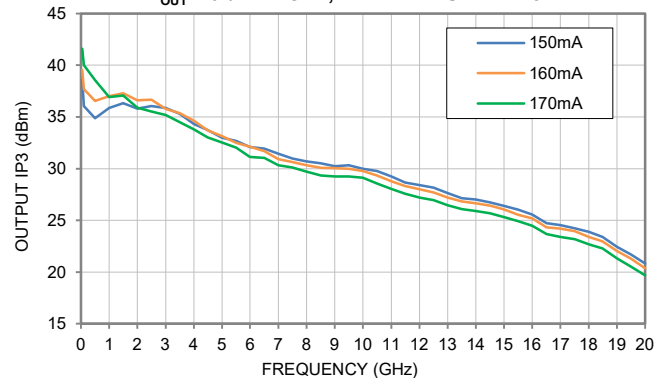ISOLATION vs. TEMPERATURE,
 $P_{IN} = -25$ dBmISOLATION vs. DEVICE CURRENT,
 $P_{IN} = -25$ dBm, TEMPERATURE = +25°COUTPUT IP3 vs. TEMPERATURE,
 $P_{OUT} = 0$ dBm/TONEOUTPUT IP3 vs. DEVICE CURRENT,
 $P_{OUT} = 0$ dBm/TONE, TEMPERATURE = +25°C




P1dB vs. TEMPERATURE

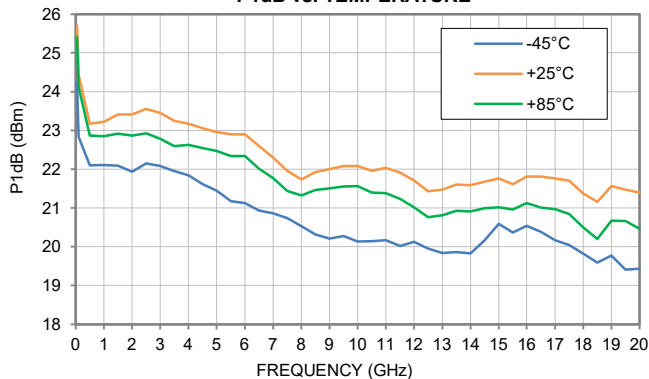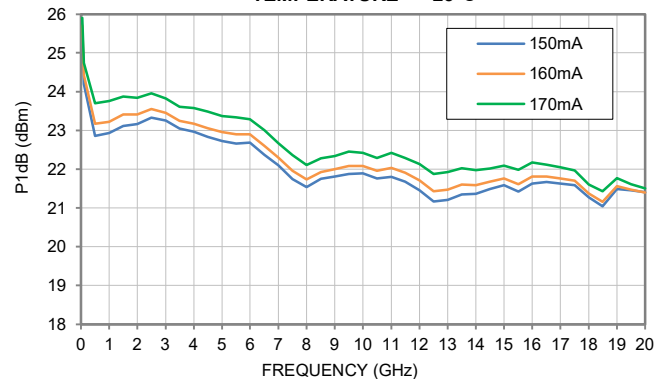P1dB vs. DEVICE CURRENT,
TEMPERATURE = +25°C



TYPICAL PERFORMANCE GRAPHS

All data taken was at nominal conditions $V_{DD} = +8V$ and $I_{DD} = 160$ mA unless noted otherwise. For over temperature data, I_{DD} is adjusted to 160 mA at each temperature specified. For over current data, V_{DD} is set to +8V and V_{GG} is adjusted until each specified current level is achieved.

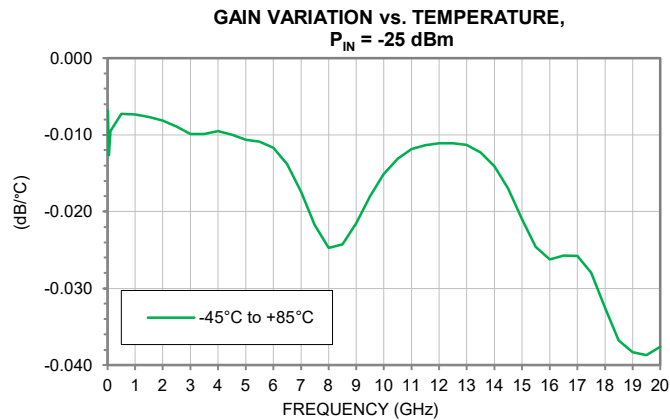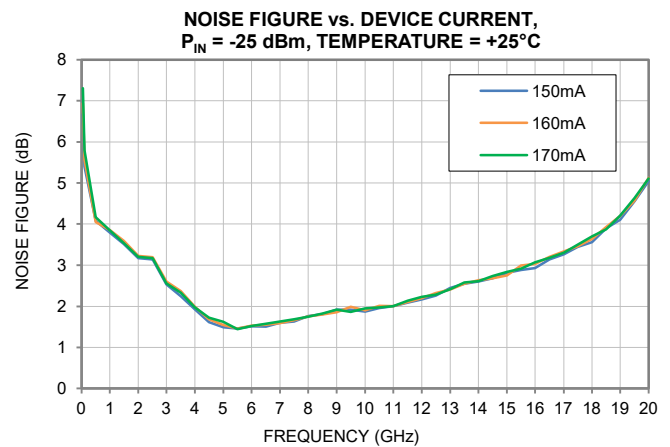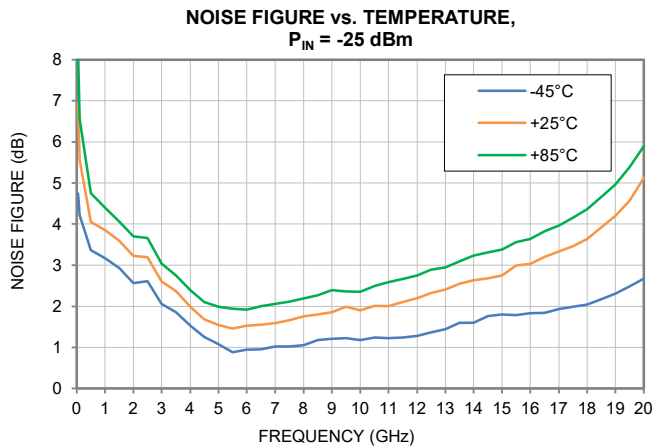



MMIC SURFACE MOUNT

Wideband Amplifier

AVA-183MP+

Mini-Circuits

50Ω 0.05 to 18 GHz High Dynamic Range Low Noise

ABSOLUTE MAXIMUM RATINGS⁶

Parameter	Ratings
Operating Temperature	-45°C to +85°C
Storage Temperature	-65°C to +150°C
Total Power Dissipation	2.8W
Junction Temperature ⁷	+175°C
Input Power (CW), $V_{DD} = +8V$, $I_{DD} = 160mA$	+21 dBm (Continuous)
DC Voltage on RF-OUT & V_{DD}	+10V
DC Voltage on RF-IN	+10V
DC Voltage on V_{GG}	-0.5V to -2V
Current I_{DD}	350mA
Current I_{GG}	-1.5mA to 0mA

6. Permanent damage may occur if any of these limits are exceeded. Maximum ratings are not intended for continuous normal operation.

7. Peak temperature on top of Die.

THERMAL RESISTANCE

Parameter	Ratings
Thermal Resistance (Θ_{jc}) ⁸	17.3 °C/W

8. Θ_{jc} = (Hot Spot Temperature on Die - Temperature at Ground Lead)/Dissipated Power

ESD RATING

	Class	Voltage Range	Reference Standard
Human Body Model (HBM)	1B	500V to <1000V	ANSI/ESDA/JEDEC JS-001-2017
Charged Device Model (CDM)	C3	1000V	JESD22-C101F



ESD HANDLING PRECAUTION: This device is designed to be Class 1B for HBM. Static charges may easily produce potentials higher than this with improper handling and can discharge into DUT and damage it. As a preventive measure Industry standard ESD handling precautions should be used at all times to protect the device from ESD damage.

MSL RATING

Moisture Sensitivity: MSL3 in accordance with IPC/JEDEC J-STD-020E/JEDEC J-STD-033C





MMIC SURFACE MOUNT

Wideband Amplifier

AVA-183MP+

Mini-Circuits

50Ω 0.05 to 18 GHz High Dynamic Range Low Noise

FUNCTIONAL DIAGRAM

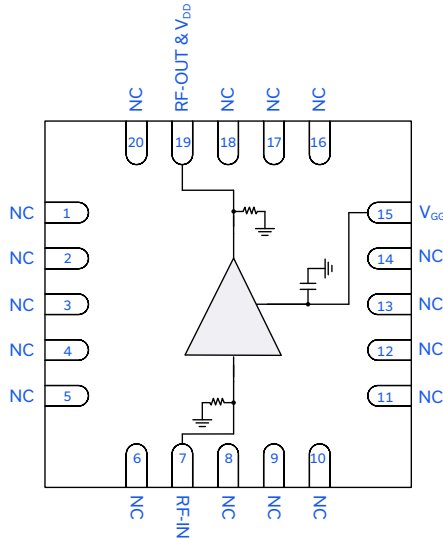


Figure 1. AVA-183MP+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF-IN	7	RF-IN Pad connects to RF-Input port. DUT includes an integrated shunt resistor for ESD protection.
RF-OUT & V _{DD}	19	RF-OUT & V _{DD} Pad connects to RF-Output and the voltage input, V _{DD} , port. DUT includes an integrated shunt resistor for ESD protection.
V _{GG}	15	Gate DC Input Pad connects to the voltage input port V _{GG} .
GND	Paddle	Connects to ground.
NC	1-6, 8-14, 16-18, & 20	Not used internally. Connected to ground on test board.

CHARACTERIZATION TEST BOARD

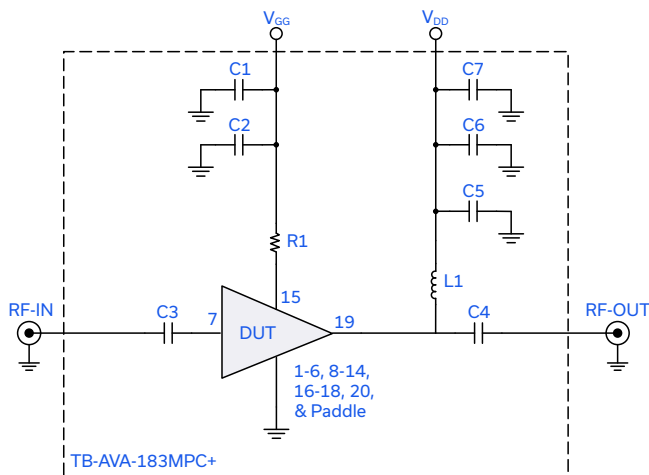


Figure 2. DUT soldered on Mini-Circuits Characterization Test Board: TB-AVA-183MPC+

Gain, Return Loss, Output Power at 1dB Compression (P_{1dB}), Output IP₃ (OIP₃) and Noise Figure measured using PNA-X N5247B Microwave Network Analyzer:

Conditions

1. Gain and Return Loss: P_{IN} = -25 dBm
2. Output IP₃ (OIP₃): Two tones, spaced 1 MHz apart, 0 dBm/line at output.
3. V_{DD} = +8V, I_{DD} = 160 mA

Caution: Permanent damage to the device will occur if the Power ON and Power OFF Sequences are not followed.

Power ON Sequence:

- 1) Set V_{GG} = -2V. Apply V_{GG}.
- 2) Set V_{DD} = +8V. Apply V_{DD}.
- 3) Increase V_{GG} to obtain desired I_{DD} as shown in specification table.
- 4) Apply RF Signal.

Power OFF Sequence:

- 1) Turn off RF Signal.
- 2) Adjust V_{GG} down to -2V.
- 3) Turn off V_{DD}.
- 4) Turn off V_{GG}.

Component	Vendor	Vendor P/N	Value	Size
C1, C7	Samsung	CL31B106KBHNNNE	10μF	1206
C2, C6	AVX	06035C104KAT2A	0.1μF	0603
C5	Murata	GRM1885C1H101GA01D	100pF	0603
C3, C4	AVX	550L104KTT	0.1μF	0402
R1	KOA	RK73H1ETTP1001F	1kΩ	0402
L1	PICONICS	CC36T44K240G5-C	0.6μH	2.5mmx3.8mm

Mini-Circuits



MMIC SURFACE MOUNT


Wideband Amplifier

AVA-183MP+

Mini-Circuits

50Ω 0.05 to 18 GHz High Dynamic Range Low Noise


CASE STYLE DRAWING

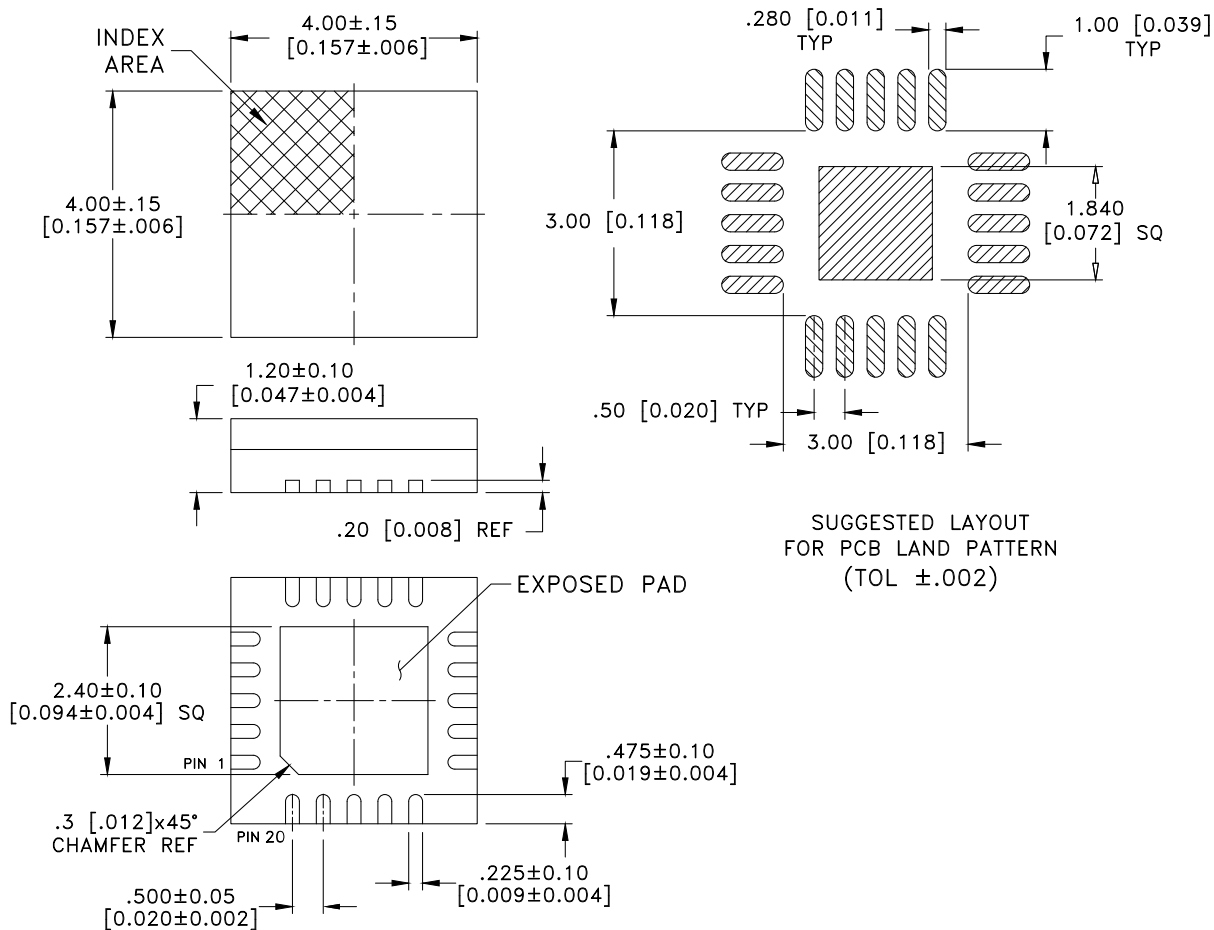

Weight: 0.1 grams
Dimensions are in inches [mm].

Figure 3. DG1847-1 Case Style Drawing

PRODUCT MARKING

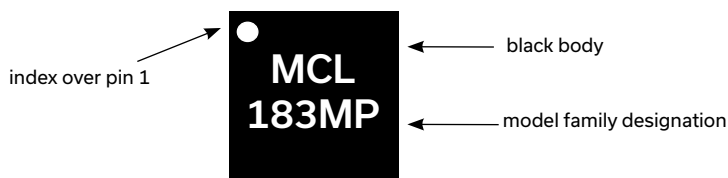

Marking may contain other features or characters for internal lot control

Figure 4. AVA-183MP+ Product Marking



Mini-Circuits

MMIC SURFACE MOUNT

Wideband Amplifier

AVA-183MP+

50Ω 0.05 to 18 GHz High Dynamic Range Low Noise

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD

[CLICK HERE](#)

Performance Data	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DG1847-1. QFN-style package, exposed paddle, Lead Finish: PPF
RoHs Status	Compliant
Tape & Reel Standard quantities available on reel	F66 7" reels with 20, 50, 100, 200, 500, or 1000 devices
Suggested Layout for PCB Design	PL-750
Evaluation Board	TB-AVA-183MPC+
	Gerber File
Environmental Ratings	ENV08T10
Product Handling	The use of no-clean solder is recommended. This package cannot be subjected to aqueous wash.

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Typical Performance Data

Definitions:

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)

TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 160mA$ @ Temperature = +25°C

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	20.50	63.94	-11.49	-14.39	66.51	1.03	39.54	25.70	6.94
0.10	18.29	66.84	-16.79	-19.62	129.75	1.01	37.68	24.43	5.56
0.50	17.15	68.00	-22.29	-24.09	174.72	1.00	36.56	23.18	4.05
1.00	17.02	59.84	-19.27	-24.72	69.41	1.01	36.99	23.22	3.86
1.50	16.73	58.71	-15.99	-23.51	62.51	1.02	37.29	23.41	3.59
2.00	16.57	55.58	-13.62	-26.64	44.13	1.04	36.60	23.41	3.23
2.50	16.38	55.65	-12.63	-24.49	45.49	1.05	36.67	23.55	3.20
3.00	16.02	57.29	-12.43	-23.79	58.01	1.05	35.75	23.45	2.61
3.50	15.76	57.93	-13.51	-21.84	66.05	1.04	35.36	23.25	2.37
4.00	15.77	51.69	-17.05	-21.29	33.29	1.01	34.63	23.18	1.99
4.50	15.97	49.37	-22.26	-20.71	25.33	1.00	33.71	23.06	1.69
5.00	16.09	47.43	-29.55	-20.64	20.09	0.99	33.13	22.96	1.54
5.50	16.17	46.16	-29.70	-20.41	17.19	0.99	32.49	22.90	1.46
6.00	16.23	45.32	-23.35	-20.28	15.48	0.99	32.12	22.90	1.53
6.50	16.24	44.25	-20.31	-19.77	13.61	1.00	31.68	22.60	1.55
7.00	16.26	43.05	-19.37	-19.24	11.82	1.00	30.92	22.30	1.60
7.50	16.26	42.15	-19.21	-18.99	10.67	1.00	30.62	21.96	1.66
8.00	16.30	40.94	-18.43	-19.64	9.30	1.00	30.33	21.74	1.76
8.50	16.33	40.16	-16.71	-21.07	8.49	1.01	30.08	21.93	1.80
9.00	16.33	39.45	-14.71	-23.49	7.82	1.03	30.05	22.00	1.85
9.50	16.30	38.84	-13.23	-25.29	7.29	1.04	29.98	22.08	1.99
10.00	16.30	38.32	-12.92	-24.51	6.87	1.04	29.77	22.08	1.91
10.50	16.30	37.75	-13.72	-22.18	6.51	1.03	29.35	21.96	2.01
11.00	16.32	37.14	-15.36	-20.43	6.15	1.01	28.78	22.04	2.01
11.50	16.37	36.39	-17.38	-19.15	5.70	1.00	28.33	21.91	2.10
12.00	16.39	35.74	-17.86	-18.76	5.32	0.99	28.01	21.72	2.20
12.50	16.42	35.01	-16.99	-18.53	4.88	0.99	27.67	21.44	2.32
13.00	16.42	34.56	-15.20	-18.56	4.60	1.00	27.20	21.48	2.41
13.50	16.38	34.21	-13.23	-19.19	4.40	1.02	26.82	21.61	2.55
14.00	16.29	33.80	-11.82	-20.43	4.19	1.05	26.64	21.59	2.64
14.50	16.18	33.61	-11.09	-22.20	4.13	1.06	26.45	21.68	2.69
15.00	16.13	33.36	-11.23	-24.25	4.07	1.06	26.04	21.76	2.75
15.50	16.14	32.96	-12.28	-25.47	3.97	1.04	25.53	21.62	3.00
16.00	16.20	32.52	-13.90	-24.76	3.85	1.02	25.18	21.81	3.03
16.50	16.22	31.96	-15.14	-22.72	3.66	1.00	24.33	21.81	3.20
17.00	16.18	31.57	-15.07	-21.42	3.53	1.00	24.18	21.76	3.34
17.50	16.12	31.19	-14.93	-20.20	3.41	1.00	23.97	21.70	3.47
18.00	16.02	30.75	-15.30	-19.16	3.29	1.00	23.39	21.37	3.64
18.50	15.89	30.62	-16.44	-18.19	3.32	0.99	22.95	21.16	3.92
19.00	15.67	30.43	-17.74	-17.26	3.35	0.98	22.02	21.57	4.20
19.50	15.36	30.37	-18.48	-16.56	3.47	0.97	21.29	21.48	4.58
20.00	14.95	30.23	-17.29	-16.55	3.59	0.97	20.35	21.40	5.13

*Typical Performance Data***Definitions:**

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)

TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 150mA$ @ Temperature = +25°C

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	20.38	66.18	-11.47	-14.59	87.40	1.03	38.61	25.55	6.67
0.10	18.19	76.31	-16.78	-19.65	390.86	1.01	36.05	24.20	5.40
0.50	17.05	63.99	-22.30	-23.86	111.47	1.00	34.89	22.86	4.08
1.00	16.91	59.11	-19.26	-24.57	64.64	1.01	35.88	22.94	3.80
1.50	16.62	55.16	-16.00	-23.32	42.03	1.02	36.33	23.12	3.51
2.00	16.46	54.53	-13.64	-26.61	39.59	1.04	35.78	23.17	3.17
2.50	16.27	53.86	-12.65	-24.58	37.50	1.05	36.03	23.33	3.14
3.00	15.91	55.56	-12.44	-23.98	48.17	1.05	35.88	23.25	2.53
3.50	15.65	55.60	-13.52	-22.01	51.18	1.04	35.31	23.05	2.25
4.00	15.66	51.62	-17.06	-21.44	33.44	1.01	34.32	22.97	1.93
4.50	15.86	49.29	-22.24	-20.79	25.39	1.00	33.72	22.83	1.61
5.00	15.98	47.07	-29.38	-20.69	19.51	0.99	32.96	22.73	1.49
5.50	16.06	46.10	-29.68	-20.41	17.30	0.99	32.70	22.66	1.46
6.00	16.12	44.88	-23.41	-20.29	14.92	0.99	32.09	22.69	1.51
6.50	16.13	43.97	-20.36	-19.75	13.35	1.00	31.92	22.38	1.51
7.00	16.15	42.59	-19.39	-19.21	11.36	1.00	31.41	22.11	1.60
7.50	16.15	41.80	-19.22	-19.00	10.38	1.00	30.96	21.74	1.63
8.00	16.19	40.74	-18.45	-19.73	9.21	1.00	30.69	21.54	1.76
8.50	16.22	40.05	-16.74	-21.20	8.49	1.01	30.53	21.75	1.80
9.00	16.22	39.34	-14.77	-23.76	7.83	1.03	30.24	21.81	1.92
9.50	16.18	38.92	-13.31	-25.62	7.46	1.04	30.34	21.88	1.92
10.00	16.19	38.00	-13.00	-24.74	6.72	1.04	29.99	21.90	1.87
10.50	16.18	37.55	-13.77	-22.34	6.45	1.03	29.76	21.76	1.95
11.00	16.21	36.99	-15.36	-20.54	6.13	1.01	29.21	21.80	2.01
11.50	16.25	36.22	-17.32	-19.23	5.66	1.00	28.67	21.68	2.09
12.00	16.27	35.62	-17.82	-18.79	5.31	0.99	28.40	21.46	2.17
12.50	16.30	34.97	-17.03	-18.53	4.92	0.99	28.15	21.17	2.26
13.00	16.30	34.32	-15.28	-18.56	4.55	1.00	27.62	21.21	2.45
13.50	16.25	33.96	-13.31	-19.24	4.34	1.02	27.15	21.35	2.55
14.00	16.16	33.54	-11.88	-20.51	4.14	1.05	27.00	21.37	2.60
14.50	16.05	33.37	-11.14	-22.39	4.09	1.06	26.74	21.49	2.69
15.00	16.00	33.20	-11.27	-24.55	4.06	1.06	26.39	21.58	2.81
15.50	16.01	32.80	-12.30	-25.85	3.96	1.04	26.01	21.42	2.88
16.00	16.06	32.29	-13.90	-25.08	3.81	1.02	25.56	21.63	2.93
16.50	16.09	31.94	-15.12	-22.99	3.71	1.01	24.71	21.68	3.14
17.00	16.05	31.40	-15.10	-21.56	3.52	1.00	24.52	21.63	3.27
17.50	15.99	31.11	-15.03	-20.20	3.43	1.00	24.25	21.60	3.44
18.00	15.89	30.74	-15.42	-19.01	3.34	1.00	23.87	21.28	3.56
18.50	15.76	30.60	-16.58	-17.98	3.36	0.99	23.40	21.05	3.90
19.00	15.54	30.44	-17.89	-17.12	3.41	0.98	22.44	21.49	4.11
19.50	15.22	30.31	-18.52	-16.57	3.50	0.97	21.69	21.46	4.56
20.00	14.81	30.18	-17.32	-16.71	3.62	0.97	20.82	21.41	5.05

Typical Performance Data

Definitions:

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)

TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 170mA$ @ Temperature = +25°C

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	20.61	64.26	-11.48	-14.20	68.05	1.03	41.59	25.91	7.30
0.10	18.40	64.70	-16.83	-19.58	100.15	1.01	40.03	24.74	5.79
0.50	17.26	59.85	-22.28	-24.36	67.57	1.00	38.54	23.70	4.17
1.00	17.12	59.19	-19.24	-24.87	63.71	1.01	36.92	23.76	3.85
1.50	16.83	57.53	-15.98	-23.60	53.91	1.02	37.04	23.87	3.54
2.00	16.68	56.94	-13.62	-26.62	50.94	1.04	35.90	23.84	3.20
2.50	16.48	55.70	-12.63	-24.41	45.22	1.05	35.52	23.96	3.17
3.00	16.12	57.99	-12.42	-23.57	62.15	1.05	35.19	23.83	2.56
3.50	15.86	58.20	-13.51	-21.69	67.35	1.04	34.48	23.62	2.33
4.00	15.87	52.03	-17.06	-21.18	34.21	1.01	33.78	23.58	1.97
4.50	16.07	49.65	-22.31	-20.60	25.84	1.00	33.00	23.48	1.72
5.00	16.19	47.79	-29.66	-20.60	20.68	0.99	32.51	23.38	1.62
5.50	16.28	46.80	-29.68	-20.41	18.28	0.99	32.00	23.34	1.44
6.00	16.33	45.45	-23.32	-20.30	15.53	0.99	31.13	23.29	1.52
6.50	16.35	44.27	-20.28	-19.79	13.48	1.00	31.02	23.01	1.58
7.00	16.37	43.11	-19.33	-19.27	11.75	1.00	30.32	22.66	1.63
7.50	16.37	42.40	-19.19	-18.94	10.84	1.00	30.10	22.37	1.69
8.00	16.41	40.96	-18.41	-19.52	9.21	1.00	29.71	22.12	1.75
8.50	16.44	40.23	-16.71	-20.92	8.45	1.01	29.35	22.29	1.82
9.00	16.44	39.67	-14.69	-23.28	7.92	1.03	29.23	22.34	1.92
9.50	16.41	39.08	-13.17	-25.07	7.39	1.04	29.27	22.46	1.86
10.00	16.41	38.38	-12.85	-24.32	6.83	1.04	29.13	22.42	1.94
10.50	16.41	38.01	-13.66	-22.00	6.61	1.03	28.56	22.30	1.98
11.00	16.44	37.26	-15.36	-20.32	6.15	1.01	28.06	22.43	2.01
11.50	16.49	36.62	-17.43	-19.09	5.77	1.00	27.57	22.29	2.14
12.00	16.51	35.88	-17.88	-18.73	5.33	0.99	27.20	22.14	2.23
12.50	16.54	35.34	-16.97	-18.53	5.00	0.99	26.94	21.88	2.28
13.00	16.54	34.77	-15.13	-18.56	4.65	1.00	26.47	21.93	2.42
13.50	16.50	34.29	-13.17	-19.15	4.37	1.02	26.08	22.03	2.58
14.00	16.41	33.95	-11.77	-20.34	4.20	1.05	25.89	21.98	2.61
14.50	16.31	33.80	-11.05	-22.07	4.16	1.06	25.69	22.02	2.74
15.00	16.26	33.44	-11.18	-23.98	4.05	1.06	25.30	22.10	2.84
15.50	16.27	33.11	-12.26	-25.14	3.98	1.04	24.90	21.98	2.92
16.00	16.33	32.66	-13.90	-24.45	3.85	1.02	24.46	22.18	3.06
16.50	16.35	32.14	-15.15	-22.51	3.68	1.00	23.67	22.12	3.18
17.00	16.32	31.70	-15.06	-21.31	3.53	1.00	23.39	22.05	3.30
17.50	16.26	31.29	-14.87	-20.19	3.39	1.00	23.16	21.97	3.50
18.00	16.16	30.92	-15.20	-19.30	3.30	1.00	22.68	21.61	3.70
18.50	16.04	30.71	-16.35	-18.36	3.30	0.99	22.27	21.43	3.87
19.00	15.83	30.61	-17.66	-17.36	3.36	0.98	21.31	21.77	4.21
19.50	15.52	30.41	-18.39	-16.55	3.42	0.97	20.54	21.62	4.63
20.00	15.11	30.27	-17.31	-16.37	3.53	0.97	19.67	21.51	5.11

Typical Performance Data

Definitions:

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)

TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 160mA$ @ Temperature = $-45^{\circ}C$

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	21.08	59.47	-11.46	-13.22	36.73	1.02	35.50	24.21	4.75
0.10	18.82	62.05	-16.85	-18.72	70.15	1.01	33.65	22.84	4.22
0.50	17.71	61.78	-23.72	-24.74	80.29	1.00	32.46	22.11	3.36
1.00	17.65	62.35	-21.40	-24.91	86.64	1.00	33.53	22.11	3.17
1.50	17.41	61.63	-17.61	-23.82	81.60	1.01	33.81	22.09	2.93
2.00	17.43	62.01	-14.97	-26.34	84.76	1.03	33.20	21.94	2.56
2.50	17.32	62.01	-13.85	-24.13	86.02	1.04	33.03	22.15	2.61
3.00	17.06	65.19	-13.14	-22.90	128.98	1.04	32.89	22.08	2.06
3.50	16.79	61.37	-13.48	-21.87	87.14	1.04	32.75	21.95	1.85
4.00	16.71	53.66	-16.66	-21.86	37.41	1.02	32.37	21.84	1.53
4.50	16.87	50.66	-21.74	-21.94	26.48	1.00	31.71	21.62	1.26
5.00	16.94	48.93	-27.97	-21.78	21.66	0.99	31.34	21.45	1.07
5.50	17.02	48.57	-31.01	-21.38	20.63	0.99	30.80	21.18	0.88
6.00	17.07	46.44	-25.70	-21.09	16.04	0.99	30.35	21.13	0.94
6.50	17.13	46.05	-22.36	-20.53	15.19	1.00	30.03	20.94	0.96
7.00	17.19	44.36	-20.90	-19.73	12.40	1.00	29.61	20.87	1.02
7.50	17.24	43.24	-20.68	-19.16	10.86	1.00	29.46	20.73	1.02
8.00	17.34	41.99	-20.87	-19.18	9.35	0.99	29.10	20.53	1.05
8.50	17.46	41.18	-19.70	-20.05	8.46	1.00	28.65	20.31	1.17
9.00	17.56	40.72	-16.46	-22.02	7.93	1.01	28.25	20.21	1.21
9.50	17.59	40.11	-13.55	-23.99	7.29	1.04	28.25	20.28	1.23
10.00	17.63	39.55	-12.33	-23.90	6.73	1.05	28.31	20.14	1.18
10.50	17.65	38.98	-12.58	-21.39	6.31	1.04	28.41	20.14	1.24
11.00	17.73	38.78	-14.13	-19.63	6.23	1.02	28.00	20.17	1.23
11.50	17.86	37.68	-16.80	-18.91	5.53	1.00	27.66	20.02	1.24
12.00	17.96	37.12	-19.16	-18.77	5.22	0.99	28.03	20.13	1.28
12.50	18.09	36.39	-20.15	-18.64	4.77	0.98	28.41	19.96	1.37
13.00	18.22	35.67	-18.43	-18.34	4.33	0.99	28.02	19.84	1.44
13.50	18.34	35.07	-15.84	-18.28	3.96	1.00	27.44	19.87	1.60
14.00	18.38	34.66	-13.49	-18.63	3.72	1.02	27.21	19.83	1.60
14.50	18.33	34.33	-11.50	-19.12	3.52	1.04	27.71	20.17	1.77
15.00	18.26	34.15	-10.45	-20.34	3.43	1.07	28.79	20.59	1.80
15.50	18.25	33.91	-10.56	-22.21	3.37	1.07	29.31	20.37	1.79
16.00	18.36	33.49	-11.95	-23.89	3.28	1.04	27.67	20.54	1.84
16.50	18.55	33.02	-14.64	-25.18	3.16	1.01	26.76	20.39	1.84
17.00	18.74	32.39	-17.72	-26.30	2.97	0.98	26.32	20.17	1.93
17.50	18.90	31.82	-18.82	-23.31	2.76	0.97	26.36	20.05	1.99
18.00	18.98	31.27	-17.56	-19.28	2.57	0.97	25.86	19.82	2.04
18.50	19.01	30.88	-16.89	-17.09	2.43	0.96	25.59	19.59	2.18
19.00	18.99	30.46	-17.36	-15.79	2.32	0.95	25.65	19.78	2.31
19.50	18.93	30.22	-19.21	-15.52	2.30	0.94	25.31	19.41	2.49
20.00	18.94	30.04	-20.98	-16.42	2.29	0.94	25.05	19.44	2.67

Typical Performance Data

Definitions:

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)

TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 150mA$ @ Temperature = $-45^{\circ}C$

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	20.84	69.35	-11.49	-13.25	118.09	1.02	39.69	24.55	4.53
0.10	18.58	63.99	-16.83	-18.73	90.16	1.01	37.77	23.23	4.04
0.50	17.46	63.03	-23.55	-24.70	95.41	1.00	36.01	22.47	3.29
1.00	17.39	61.56	-21.12	-24.88	81.46	1.00	36.32	22.48	3.08
1.50	17.14	60.79	-17.35	-23.78	76.26	1.01	38.37	22.48	2.78
2.00	17.15	62.08	-14.76	-26.26	88.09	1.03	37.30	22.38	2.56
2.50	17.04	60.82	-13.65	-24.11	77.36	1.04	37.38	22.56	2.64
3.00	16.77	63.75	-12.99	-22.87	112.68	1.04	36.75	22.50	2.05
3.50	16.51	59.82	-13.38	-21.85	75.18	1.04	36.23	22.35	1.86
4.00	16.43	53.94	-16.59	-21.82	39.88	1.02	35.99	22.27	1.54
4.50	16.60	51.14	-21.69	-21.89	28.91	1.00	34.47	22.04	1.17
5.00	16.66	49.01	-28.22	-21.73	22.56	0.99	33.96	21.89	1.04
5.50	16.74	47.80	-31.27	-21.36	19.50	0.99	32.85	21.66	0.98
6.00	16.80	46.52	-25.59	-21.09	16.71	0.99	31.90	21.66	0.86
6.50	16.86	45.72	-22.15	-20.57	15.10	1.00	31.10	21.47	0.92
7.00	16.92	44.49	-20.60	-19.82	12.99	1.00	30.60	21.29	0.97
7.50	16.96	43.36	-20.36	-19.23	11.36	1.00	30.22	21.10	0.99
8.00	17.06	42.11	-20.39	-19.27	9.79	1.00	29.57	20.85	1.11
8.50	17.17	41.20	-19.12	-20.14	8.76	1.00	28.96	20.78	1.04
9.00	17.27	40.53	-16.03	-22.11	8.01	1.02	28.37	20.80	1.17
9.50	17.29	40.11	-13.34	-24.21	7.53	1.04	28.26	20.87	1.22
10.00	17.32	39.23	-12.24	-24.02	6.71	1.05	28.08	20.85	1.14
10.50	17.35	39.01	-12.56	-21.43	6.55	1.05	28.07	20.81	1.21
11.00	17.43	38.61	-14.16	-19.59	6.32	1.02	27.51	20.86	1.20
11.50	17.56	37.72	-16.84	-18.73	5.76	1.00	27.17	20.75	1.20
12.00	17.65	37.10	-19.05	-18.56	5.39	0.99	27.35	20.82	1.28
12.50	17.78	36.25	-19.69	-18.51	4.86	0.98	27.63	20.57	1.34
13.00	17.90	35.57	-17.85	-18.39	4.43	0.99	27.20	20.44	1.43
13.50	17.99	35.04	-15.32	-18.53	4.10	1.00	26.54	20.49	1.52
14.00	18.02	34.70	-13.10	-19.04	3.88	1.02	26.25	20.46	1.59
14.50	17.95	34.23	-11.25	-19.71	3.62	1.05	26.44	20.76	1.71
15.00	17.87	34.23	-10.35	-21.07	3.60	1.07	27.18	21.05	1.74
15.50	17.87	34.03	-10.59	-23.01	3.57	1.07	27.81	20.82	1.79
16.00	17.99	33.49	-12.14	-24.36	3.43	1.04	26.46	20.94	1.88
16.50	18.16	33.05	-14.94	-24.95	3.32	1.01	25.31	20.80	1.87
17.00	18.32	32.34	-17.78	-25.03	3.09	0.99	25.00	20.65	1.92
17.50	18.45	31.89	-18.26	-22.46	2.92	0.98	24.96	20.58	2.04
18.00	18.49	31.33	-16.91	-19.38	2.72	0.97	24.51	20.39	2.10
18.50	18.49	30.95	-16.37	-17.58	2.59	0.97	24.11	20.09	2.22
19.00	18.44	30.68	-17.09	-16.35	2.52	0.97	24.02	20.23	2.36
19.50	18.35	30.51	-19.12	-15.88	2.53	0.95	23.81	20.14	2.63
20.00	18.31	30.22	-21.30	-16.39	2.49	0.95	23.52	20.14	2.77

Typical Performance Data

Definitions:

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)

TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 170mA$ @ Temperature = $-45^{\circ}C$

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	21.29	62.42	-11.48	-13.21	50.47	1.02	32.56	24.11	5.00
0.10	19.04	61.28	-16.85	-18.71	62.64	1.01	31.40	22.74	4.36
0.50	17.93	71.30	-23.97	-24.79	234.28	1.00	30.54	22.05	3.35
1.00	17.87	63.66	-21.60	-24.96	98.33	1.00	31.23	22.07	3.16
1.50	17.63	60.79	-17.80	-23.86	72.25	1.01	31.13	22.04	2.93
2.00	17.65	61.06	-15.14	-26.36	74.16	1.03	30.85	21.88	2.65
2.50	17.55	61.64	-14.01	-24.12	80.35	1.04	30.89	22.03	2.68
3.00	17.29	67.90	-13.28	-22.94	171.69	1.04	30.71	21.95	2.06
3.50	17.03	60.40	-13.58	-21.90	75.97	1.04	30.56	21.81	1.89
4.00	16.94	53.62	-16.73	-21.88	36.31	1.01	30.32	21.71	1.58
4.50	17.10	50.77	-21.78	-21.96	26.16	1.00	30.04	21.53	1.34
5.00	17.17	49.36	-27.78	-21.83	22.18	0.99	29.69	21.41	1.15
5.50	17.24	48.14	-30.68	-21.42	19.13	0.99	29.45	21.14	0.96
6.00	17.30	46.45	-25.85	-21.13	15.64	0.99	29.16	21.09	0.98
6.50	17.36	45.60	-22.53	-20.49	14.05	1.00	28.81	20.90	1.01
7.00	17.42	44.35	-21.11	-19.66	12.08	1.00	28.57	20.75	1.01
7.50	17.47	43.33	-20.98	-19.07	10.68	0.99	28.55	20.61	1.03
8.00	17.57	41.98	-21.27	-19.07	9.10	0.99	28.24	20.45	1.09
8.50	17.69	41.23	-20.18	-19.94	8.30	1.00	27.96	20.17	1.16
9.00	17.80	40.51	-16.81	-21.87	7.55	1.01	27.60	19.98	1.24
9.50	17.83	40.28	-13.75	-23.91	7.25	1.04	27.63	20.00	1.21
10.00	17.87	39.35	-12.44	-23.79	6.42	1.05	27.78	19.85	1.16
10.50	17.89	38.92	-12.61	-21.35	6.11	1.04	27.92	19.85	1.22
11.00	17.97	38.65	-14.12	-19.65	5.98	1.02	27.46	19.82	1.29
11.50	18.11	37.80	-16.76	-19.06	5.46	1.00	27.36	19.68	1.26
12.00	18.20	37.22	-19.22	-18.97	5.14	0.99	27.69	19.76	1.29
12.50	18.34	36.46	-20.50	-18.78	4.68	0.98	27.92	19.68	1.40
13.00	18.48	35.72	-18.93	-18.33	4.23	0.98	27.67	19.67	1.48
13.50	18.60	35.02	-16.29	-18.10	3.83	0.99	27.35	19.58	1.56
14.00	18.67	34.70	-13.86	-18.31	3.63	1.01	27.20	19.45	1.63
14.50	18.62	34.31	-11.72	-18.68	3.41	1.04	27.75	19.87	1.69
15.00	18.55	34.18	-10.57	-19.78	3.33	1.06	28.85	20.42	1.83
15.50	18.54	33.89	-10.55	-21.55	3.25	1.07	29.08	20.26	1.80
16.00	18.65	33.60	-11.83	-23.32	3.20	1.04	27.67	20.42	1.81
16.50	18.85	33.01	-14.41	-25.16	3.05	1.01	26.85	20.26	1.87
17.00	19.05	32.46	-17.55	-27.36	2.89	0.98	26.48	20.04	1.87
17.50	19.23	31.95	-19.11	-24.09	2.71	0.97	26.52	19.88	2.00
18.00	19.34	31.38	-18.12	-19.27	2.51	0.96	26.02	19.61	2.09
18.50	19.41	30.86	-17.39	-16.73	2.33	0.96	25.98	19.35	2.25
19.00	19.41	30.45	-17.72	-15.31	2.22	0.95	26.01	19.60	2.26
19.50	19.37	30.19	-19.39	-15.12	2.18	0.94	25.60	19.12	2.47
20.00	19.41	29.85	-20.82	-16.32	2.13	0.93	25.36	19.14	2.59

Typical Performance Data

Definitions:

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)

TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 160mA$ @ Temperature = $+85^{\circ}C$

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	20.44	60.85	-11.50	-14.50	47.01	1.03	35.90	25.40	8.19
0.10	18.24	66.04	-16.88	-19.81	119.15	1.01	34.47	24.12	6.56
0.50	17.06	59.81	-22.32	-24.53	68.88	1.00	33.49	22.87	4.75
1.00	16.91	56.64	-19.46	-24.84	48.66	1.01	34.30	22.85	4.40
1.50	16.62	56.72	-16.07	-23.61	50.34	1.02	34.22	22.91	4.06
2.00	16.43	53.97	-13.68	-26.85	37.29	1.04	34.32	22.87	3.70
2.50	16.20	53.61	-12.81	-24.73	36.78	1.05	34.89	22.92	3.66
3.00	15.82	53.42	-12.69	-24.21	38.19	1.05	34.58	22.79	3.04
3.50	15.59	56.34	-13.88	-21.85	56.35	1.03	34.30	22.60	2.75
4.00	15.65	51.40	-17.84	-21.06	32.75	1.01	33.94	22.63	2.39
4.50	15.86	48.33	-23.46	-20.44	22.75	1.00	33.85	22.55	2.10
5.00	15.98	46.61	-29.86	-20.41	18.48	0.99	33.32	22.47	1.99
5.50	16.06	45.52	-29.41	-20.16	16.17	0.99	33.27	22.34	1.94
6.00	16.10	44.24	-23.54	-20.04	13.86	0.99	33.18	22.34	1.92
6.50	16.10	43.13	-20.57	-19.48	12.17	1.00	32.88	22.02	2.00
7.00	16.10	41.98	-19.60	-19.14	10.66	1.00	32.54	21.77	2.06
7.50	16.08	40.91	-19.35	-18.96	9.46	1.00	32.14	21.44	2.11
8.00	16.10	39.89	-18.58	-19.78	8.45	1.00	31.86	21.32	2.19
8.50	16.11	39.40	-16.90	-21.40	8.00	1.01	31.92	21.46	2.27
9.00	16.08	38.67	-14.85	-23.82	7.38	1.03	31.74	21.51	2.40
9.50	16.03	38.09	-13.47	-25.31	6.92	1.04	31.64	21.55	2.36
10.00	16.00	37.48	-13.30	-24.55	6.49	1.04	31.46	21.56	2.35
10.50	15.98	37.03	-14.15	-22.40	6.25	1.03	31.24	21.40	2.49
11.00	15.97	36.51	-15.60	-20.75	5.98	1.01	30.52	21.38	2.59
11.50	15.99	35.68	-17.16	-19.39	5.48	1.00	30.23	21.23	2.66
12.00	16.00	35.00	-17.34	-18.81	5.10	0.99	29.98	21.02	2.76
12.50	16.02	34.51	-16.60	-18.54	4.82	1.00	29.72	20.76	2.89
13.00	16.02	33.91	-15.10	-18.67	4.48	1.00	29.22	20.81	2.95
13.50	15.97	33.47	-13.28	-19.45	4.25	1.02	28.90	20.93	3.09
14.00	15.87	33.13	-11.86	-20.72	4.08	1.05	28.60	20.91	3.24
14.50	15.76	32.88	-11.13	-22.26	3.99	1.06	28.52	20.99	3.31
15.00	15.72	32.62	-11.33	-23.83	3.93	1.06	28.23	21.03	3.38
15.50	15.74	32.25	-12.48	-24.40	3.85	1.04	27.84	20.96	3.56
16.00	15.79	31.83	-13.98	-23.62	3.73	1.02	27.53	21.13	3.64
16.50	15.79	31.38	-14.97	-22.41	3.60	1.00	26.94	21.01	3.82
17.00	15.74	30.87	-14.98	-21.54	3.43	1.00	26.79	20.97	3.97
17.50	15.67	30.53	-15.06	-20.21	3.33	1.00	26.46	20.85	4.15
18.00	15.56	30.28	-15.55	-18.93	3.29	1.00	26.01	20.50	4.36
18.50	15.41	30.03	-16.94	-17.69	3.28	0.99	25.48	20.20	4.67
19.00	15.18	29.95	-18.25	-16.90	3.36	0.98	24.57	20.68	4.97
19.50	14.85	29.80	-18.30	-16.73	3.45	0.97	23.88	20.66	5.39
20.00	14.42	29.72	-16.74	-17.21	3.59	0.98	23.05	20.47	5.89

*Typical Performance Data***Definitions:**

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)

TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 150mA$ @ Temperature = $+85^{\circ}C$

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	20.32	63.31	-11.49	-14.66	63.40	1.03	35.26	25.14	8.01
0.10	18.11	67.58	-16.85	-19.84	144.27	1.01	33.83	23.69	6.38
0.50	16.94	61.84	-22.32	-24.26	88.15	1.00	32.87	22.37	4.68
1.00	16.79	56.40	-19.46	-24.71	48.03	1.01	33.66	22.34	4.37
1.50	16.50	55.25	-16.07	-23.48	43.12	1.02	33.67	22.41	4.02
2.00	16.30	52.07	-13.68	-26.78	30.42	1.04	33.74	22.38	3.69
2.50	16.08	52.91	-12.83	-24.82	34.46	1.05	34.14	22.44	3.66
3.00	15.70	54.23	-12.73	-24.47	42.57	1.05	34.14	22.31	3.03
3.50	15.46	53.66	-13.91	-22.02	42.02	1.03	33.75	22.10	2.74
4.00	15.53	51.03	-17.89	-21.20	31.81	1.01	33.57	22.13	2.34
4.50	15.74	47.50	-23.52	-20.47	20.98	1.00	33.27	22.05	2.06
5.00	15.86	46.17	-29.77	-20.45	17.83	0.99	33.05	21.96	1.93
5.50	15.94	44.94	-29.18	-20.12	15.35	0.99	32.97	21.84	1.91
6.00	15.97	43.55	-23.46	-20.00	13.00	0.99	32.65	21.84	1.90
6.50	15.97	42.88	-20.51	-19.42	11.99	1.00	32.58	21.52	2.03
7.00	15.96	41.85	-19.55	-19.10	10.66	1.00	32.13	21.28	2.01
7.50	15.95	40.86	-19.32	-18.96	9.54	1.00	31.83	20.97	2.13
8.00	15.97	39.73	-18.59	-19.86	8.42	1.00	31.91	20.88	2.13
8.50	15.97	39.13	-16.90	-21.57	7.88	1.01	31.75	21.04	2.29
9.00	15.94	38.42	-14.88	-24.07	7.29	1.03	31.67	21.10	2.31
9.50	15.89	38.00	-13.56	-25.48	6.97	1.04	31.76	21.12	2.44
10.00	15.87	37.26	-13.42	-24.63	6.43	1.04	31.64	21.14	2.39
10.50	15.84	36.80	-14.27	-22.45	6.19	1.03	31.38	20.97	2.49
11.00	15.84	36.26	-15.65	-20.80	5.90	1.01	30.80	20.91	2.52
11.50	15.86	35.56	-17.15	-19.46	5.50	1.00	30.25	20.75	2.61
12.00	15.86	34.90	-17.32	-18.87	5.13	0.99	30.09	20.52	2.78
12.50	15.87	34.24	-16.62	-18.58	4.75	0.99	29.78	20.24	2.85
13.00	15.87	33.68	-15.16	-18.70	4.43	1.00	29.34	20.29	2.99
13.50	15.82	33.28	-13.36	-19.46	4.22	1.02	28.96	20.41	3.12
14.00	15.72	33.04	-11.96	-20.73	4.12	1.04	28.85	20.42	3.21
14.50	15.62	32.71	-11.23	-22.37	3.99	1.06	28.65	20.54	3.38
15.00	15.57	32.40	-11.42	-24.02	3.91	1.06	28.38	20.58	3.40
15.50	15.59	32.14	-12.54	-24.63	3.87	1.04	28.26	20.50	3.56
16.00	15.64	31.62	-14.02	-23.81	3.71	1.02	27.79	20.68	3.64
16.50	15.64	31.22	-15.01	-22.52	3.59	1.00	27.24	20.59	3.81
17.00	15.59	30.76	-15.06	-21.58	3.45	1.00	27.03	20.56	4.03
17.50	15.51	30.48	-15.17	-20.14	3.37	1.00	26.83	20.45	4.15
18.00	15.39	30.10	-15.73	-18.80	3.28	0.99	26.28	20.14	4.34
18.50	15.25	29.91	-17.13	-17.57	3.30	0.98	25.84	19.82	4.64
19.00	15.02	29.82	-18.42	-16.83	3.37	0.98	24.98	20.34	4.94
19.50	14.69	29.74	-18.44	-16.76	3.49	0.97	24.24	20.42	5.42
20.00	14.25	29.65	-16.83	-17.41	3.64	0.98	23.40	20.28	5.89

*Typical Performance Data***Definitions:**

Input Return Loss = S11 (dB)

Gain(Power Gain) = S21 (dB)

Isolation = -S12 (dB)

Output Return Loss = S22 (dB)


TEST CONDITIONS: $V_{DD} = +8.00V$, $I_{DD} = 170mA$ @ Temperature = +85°C

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(GHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
0.05	20.55	72.62	-11.48	-14.36	179.80	1.03	37.05	25.58	8.43
0.10	18.33	62.61	-16.87	-19.79	79.43	1.01	34.90	24.42	6.76
0.50	17.16	65.49	-22.36	-24.78	130.85	1.00	34.10	23.28	4.74
1.00	17.01	58.99	-19.46	-25.01	63.06	1.01	34.70	23.27	4.43
1.50	16.72	56.21	-16.06	-23.72	46.98	1.02	34.95	23.31	4.11
2.00	16.53	54.30	-13.67	-26.85	38.30	1.04	34.90	23.27	3.75
2.50	16.31	53.77	-12.81	-24.59	37.03	1.05	35.28	23.34	3.69
3.00	15.92	55.00	-12.68	-23.98	45.24	1.05	35.41	23.18	3.11
3.50	15.69	56.35	-13.86	-21.69	55.74	1.03	34.69	23.00	2.82
4.00	15.74	50.77	-17.78	-20.93	30.09	1.01	34.49	23.02	2.41
4.50	15.96	48.34	-23.41	-20.39	22.52	1.00	33.81	22.96	2.12
5.00	16.09	46.84	-29.75	-20.41	18.76	0.99	33.92	22.88	2.04
5.50	16.16	45.56	-29.59	-20.17	16.06	0.99	33.61	22.78	1.93
6.00	16.21	44.31	-23.64	-20.08	13.82	0.99	33.01	22.74	1.98
6.50	16.20	43.27	-20.65	-19.52	12.22	1.00	32.74	22.44	2.00
7.00	16.20	42.43	-19.66	-19.16	11.09	1.00	32.17	22.16	2.10
7.50	16.19	41.22	-19.39	-18.93	9.68	1.00	32.09	21.84	2.05
8.00	16.20	40.33	-18.64	-19.67	8.77	1.00	31.80	21.69	2.24
8.50	16.21	39.57	-16.92	-21.18	8.05	1.01	31.73	21.82	2.30
9.00	16.19	38.88	-14.82	-23.51	7.45	1.03	31.24	21.85	2.42
9.50	16.13	38.08	-13.40	-25.05	6.83	1.04	31.24	21.91	2.36
10.00	16.11	37.76	-13.21	-24.47	6.61	1.04	30.90	21.90	2.48
10.50	16.09	37.11	-14.07	-22.33	6.22	1.03	30.90	21.74	2.51
11.00	16.08	36.67	-15.55	-20.67	6.00	1.01	30.24	21.76	2.61
11.50	16.10	35.89	-17.15	-19.31	5.55	1.00	29.81	21.63	2.66
12.00	16.11	35.16	-17.34	-18.76	5.13	0.99	29.61	21.44	2.76
12.50	16.13	34.59	-16.59	-18.50	4.80	0.99	29.23	21.18	2.89
13.00	16.13	34.04	-15.07	-18.63	4.48	1.00	28.67	21.24	2.98
13.50	16.08	33.54	-13.22	-19.41	4.22	1.02	28.52	21.36	3.19
14.00	15.99	33.36	-11.78	-20.70	4.13	1.05	28.28	21.29	3.29
14.50	15.88	33.13	-11.04	-22.16	4.05	1.06	27.95	21.35	3.44
15.00	15.84	32.74	-11.24	-23.64	3.92	1.06	27.69	21.37	3.47
15.50	15.86	32.40	-12.41	-24.16	3.85	1.04	27.39	21.34	3.60
16.00	15.91	31.85	-13.92	-23.41	3.69	1.02	27.10	21.49	3.68
16.50	15.92	31.41	-14.91	-22.23	3.56	1.00	26.39	21.35	3.86
17.00	15.86	31.00	-14.89	-21.45	3.43	1.00	26.17	21.29	4.03
17.50	15.80	30.71	-14.92	-20.22	3.35	1.00	25.96	21.19	4.22
18.00	15.68	30.33	-15.40	-19.11	3.26	1.00	25.42	20.80	4.41
18.50	15.55	30.10	-16.79	-17.85	3.26	0.99	24.77	20.53	4.70
19.00	15.32	30.04	-18.08	-16.96	3.34	0.98	24.04	20.96	4.97
19.50	14.99	29.82	-18.11	-16.67	3.40	0.97	23.29	20.87	5.44
20.00	14.57	29.75	-16.66	-17.03	3.54	0.98	22.44	20.64	5.96


Typical Performance Curves

Note: All data taken was at nominal conditions $V_{DD} = +8V$, $I_{DD} = 160\text{ mA}$, and $V_{GG} = -1.3V$ unless noted otherwise. For over temperature data, I_{DD} is adjusted to 160 mA at each temperature specified. For over temperature data, I_{DD} is adjusted to 160 mA at each voltage specified.


GAIN vs. TEMPERATURE,
 $P_{IN} = -25\text{ dBm}$

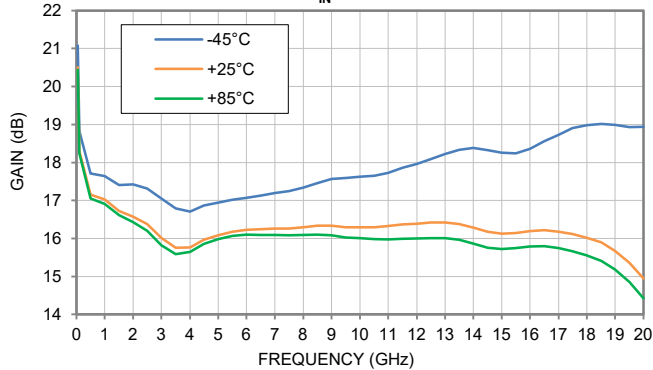


GAIN vs. DEVICE CURRENT,
 $P_{IN} = -25\text{ dBm}$, TEMPERATURE = +25°C

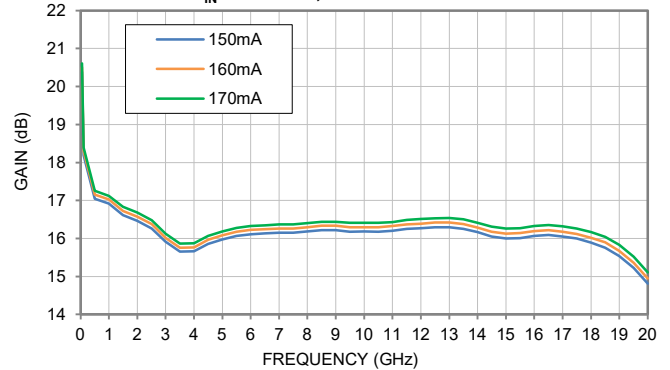


INPUT RETURN LOSS vs. TEMPERATURE,
 $P_{IN} = -25\text{ dBm}$

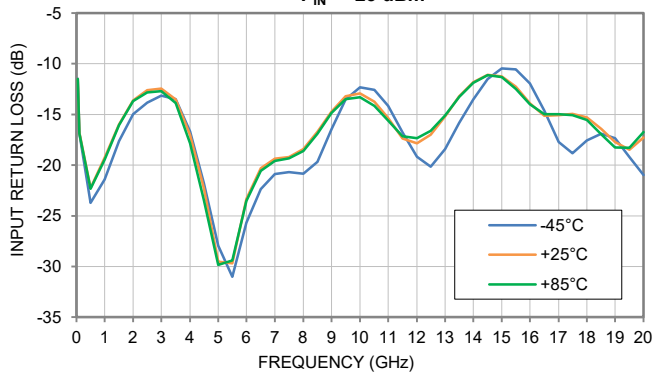


INPUT RETURN LOSS vs. DEVICE CURRENT,
 $P_{IN} = -25\text{ dBm}$, TEMPERATURE = +25°C

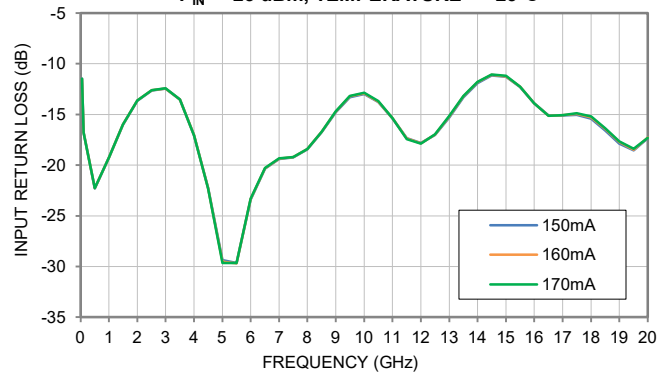

OUTPUT RETURN LOSS vs. TEMPERATURE,
 $P_{IN} = -25\text{ dBm}$

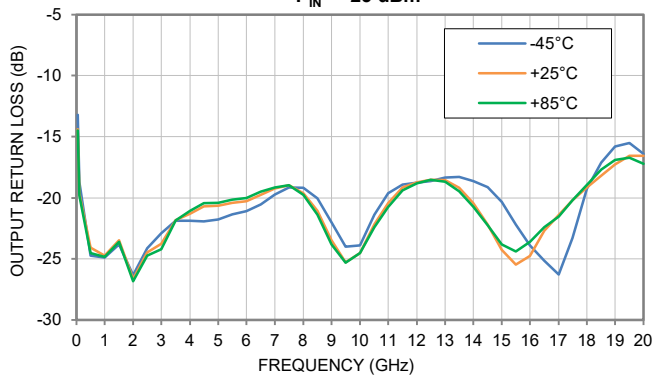


OUTPUT RETURN LOSS vs. DEVICE CURRENT,
 $P_{IN} = -25\text{ dBm}$, TEMPERATURE = +25°C

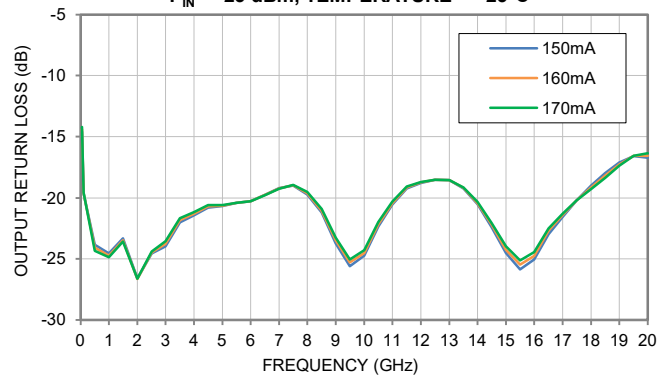


Typical Performance Curves

Note: All data taken was at nominal conditions $V_{DD} = +8V$, $I_{DD} = 160\text{ mA}$, and $V_{GG} = -1.3V$ unless noted otherwise. For over temperature data, I_{DD} is adjusted to 160 mA at each temperature specified. For over temperature data, I_{DD} is adjusted to 160 mA at each voltage specified.


ISOLATION vs. TEMPERATURE,
 $P_{IN} = -25\text{ dBm}$

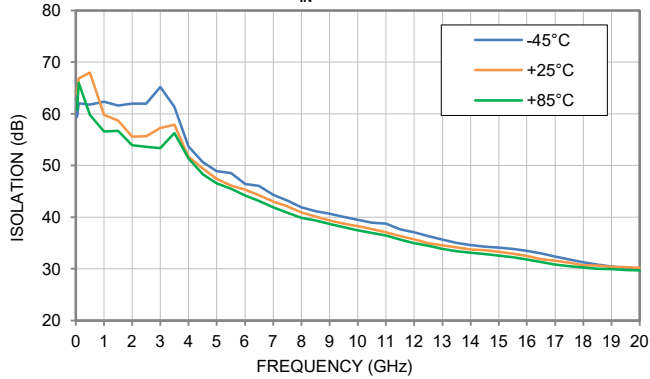


ISOLATION vs. DEVICE CURRENT,
 $P_{IN} = -25\text{ dBm}$, TEMPERATURE = +25°C

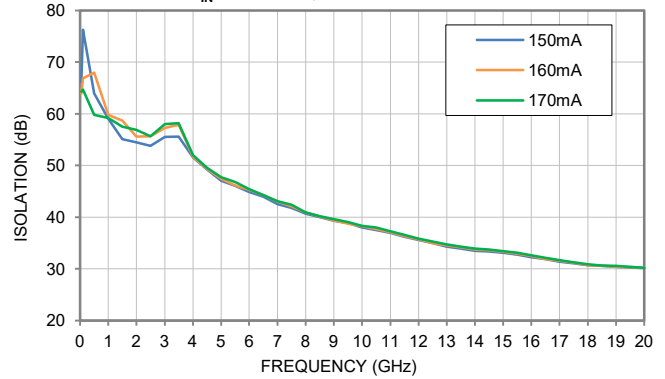


OUTPUT IP3 vs. TEMPERATURE,
 $P_{OUT} = 0\text{ dBm/TONE}$

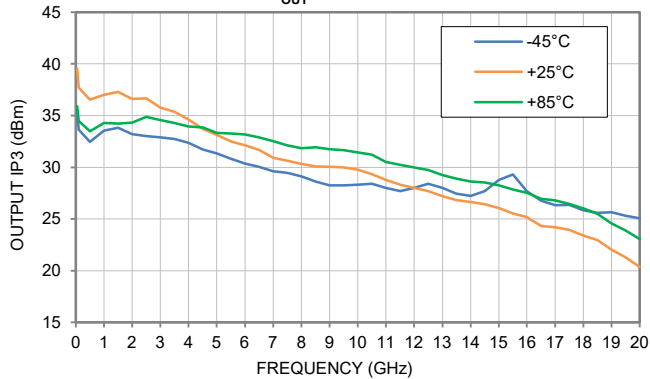


OUTPUT IP3 vs. DEVICE CURRENT,
 $P_{OUT} = 0\text{ dBm/TONE}$, TEMPERATURE = +25°C

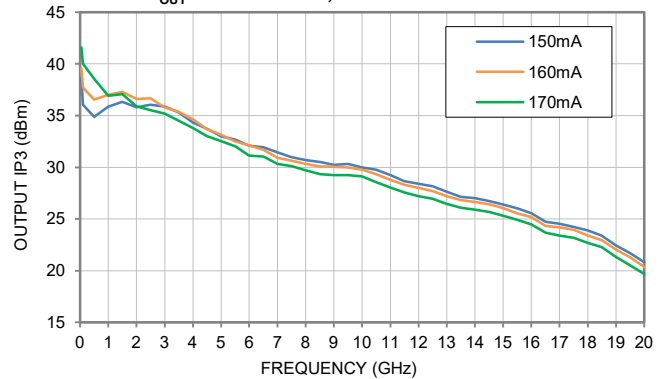

P1dB vs. TEMPERATURE



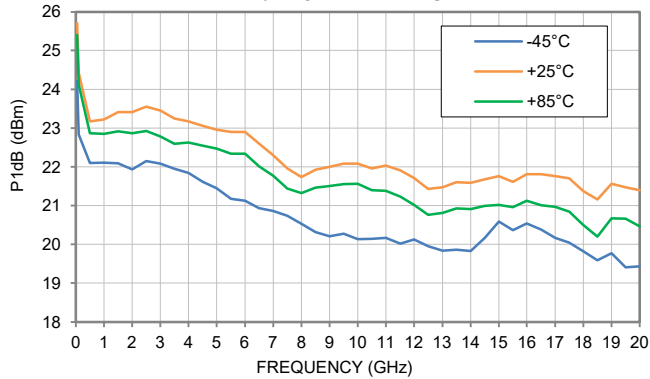


P1dB vs. DEVICE CURRENT,
TEMPERATURE = +25°C

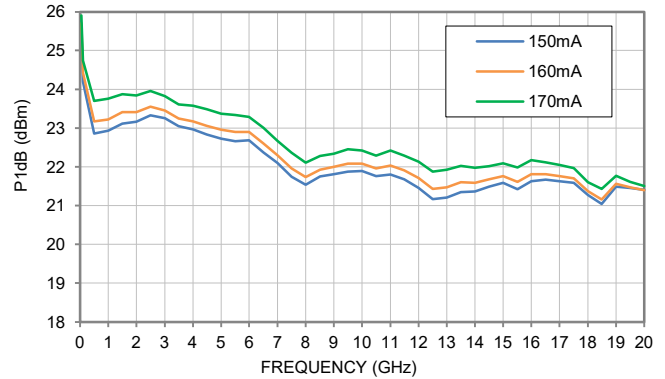


Typical Performance Curves

Note: All data taken was at nominal conditions $V_{DD} = +8V$, $I_{DD} = 160\text{ mA}$, and $V_{GG} = -1.3V$ unless noted otherwise. For over temperature data, I_{DD} is adjusted to 160 mA at each temperature specified. For over temperature data, I_{DD} is adjusted to 160 mA at each voltage specified.

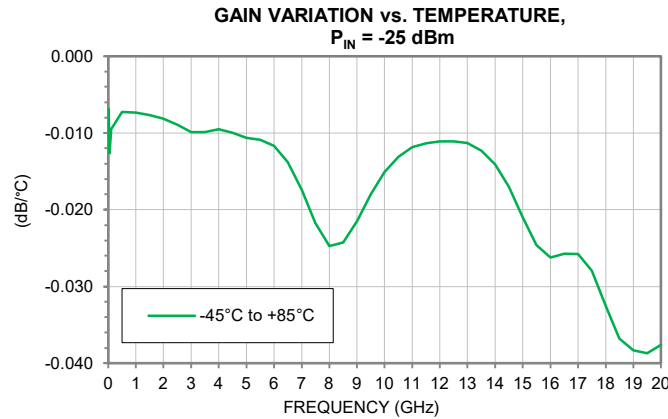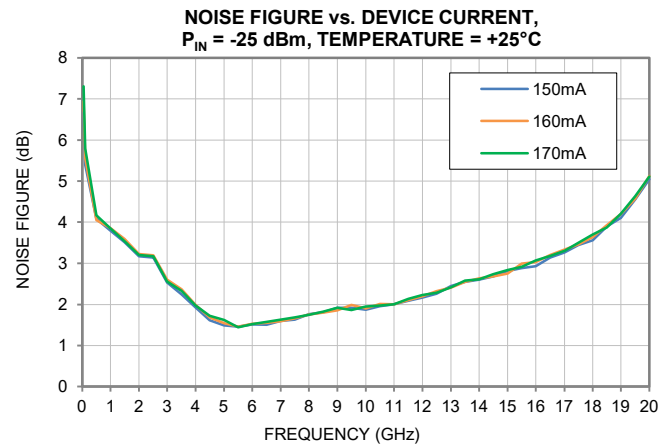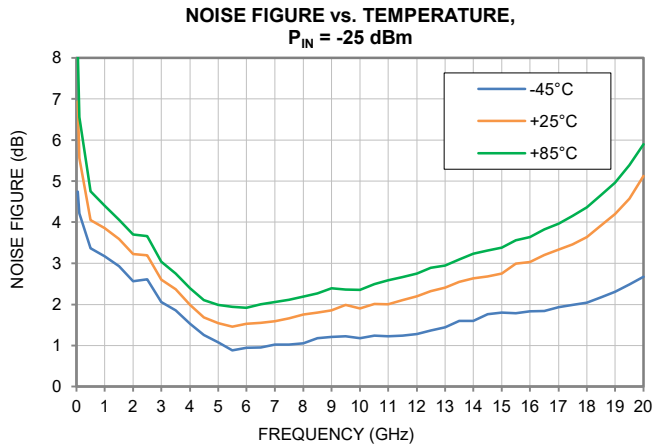

Outline Dimensions

DG1847-1

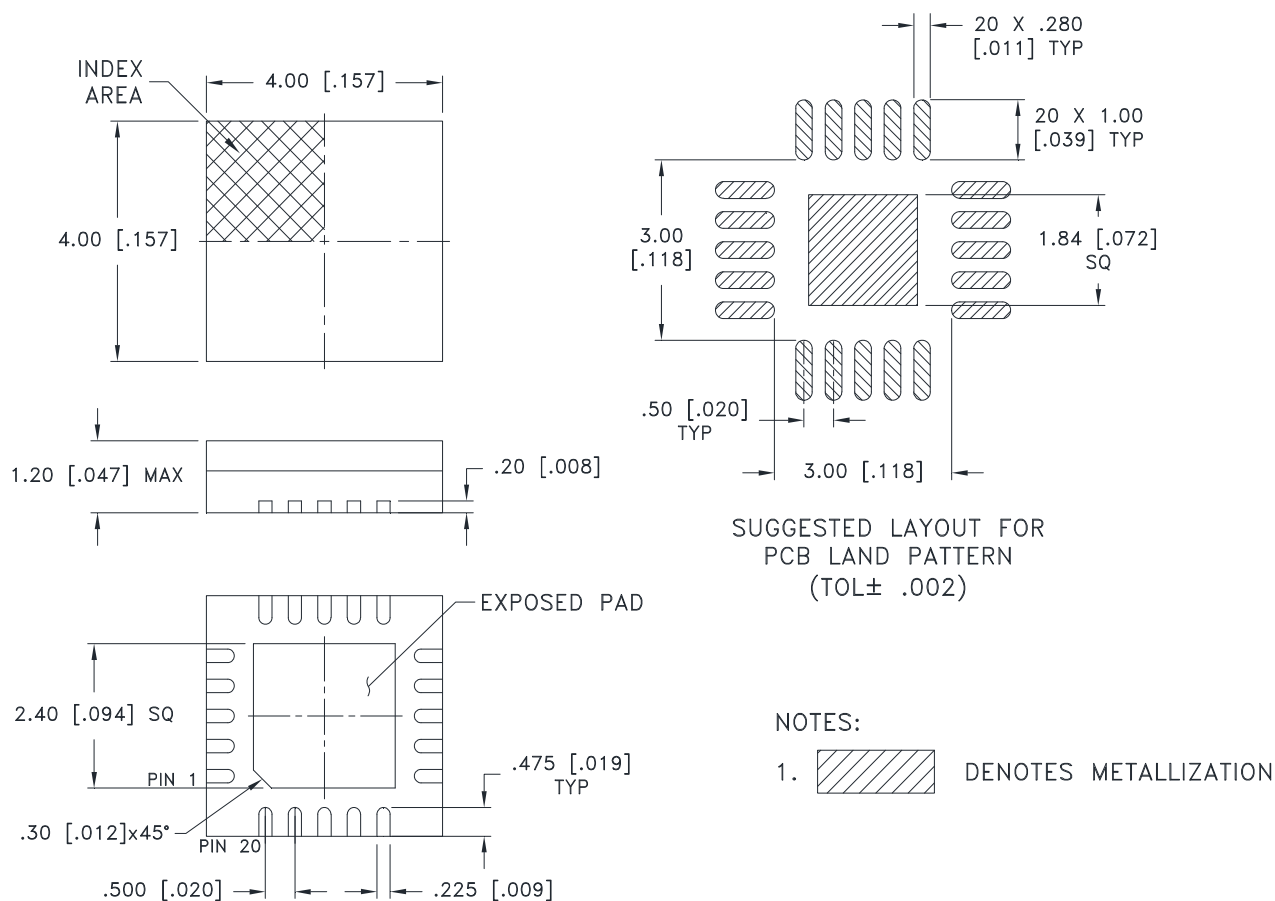

Weight: 0.1 Grams

Dimensions are in mm(ounces). Tolerances: 2 Pl. ±.25(.01); 3 Pl. ± .127(.005)

Notes:

1. Case material : Plastic
2. Termination finish: PPF (NiPdAu Plating 0.5 μm/0.02μm/0.05μm)




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F66

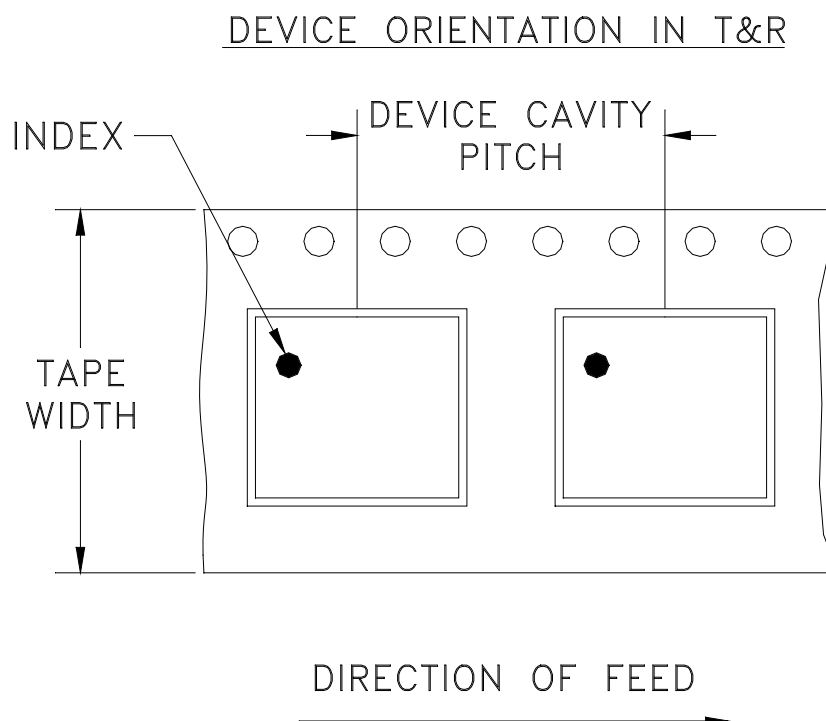

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
8	4	7	Small quantity standard	20
				50
				100
				200
				500
		7	Standard	1000, 2000, 3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf





INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION		REVISIONS				
		REV	ECN No.	DESCRIPTION	DATE	DR
		OR	ECO-016724	NEW RELEASE	02/07/23	ITG


SUGGESTED MOUNTING CONFIGURATION FOR
DG1847-1 CASE STYLE

92X ϕ .012 PTH, PLUGGED
FROM TOP SIDE &
CAPPED WITH COPPER

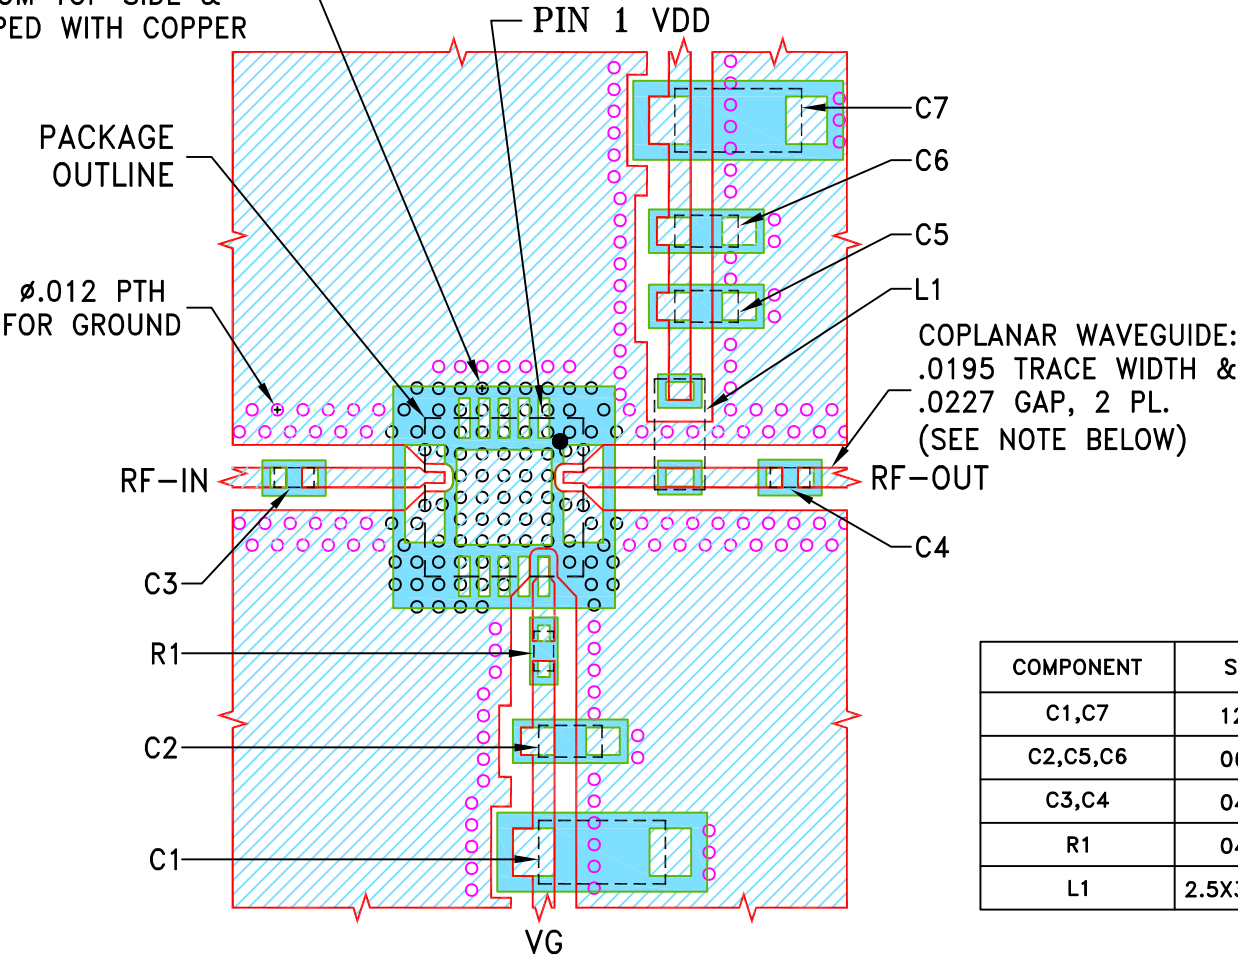

NOTES:

- TRACE WIDTH AND GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- UNIT FOOT PRINT IS OPTIMIZED FOR PERFORMANCE AND IS DIFFERENT FROM CASE STYLE DG1847-1 RECOMMENDATIONS.
- CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-AVA-183MP+ OR TB-AVA-183MPC+.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.


UNLESS OTHERWISE SPECIFIED		INITIALS		DATE	
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ± 	DRAWN	ITG	02/06/23		
	CHECKED	GF	02/06/23		
	APPROVED	IL	02/06/23		
Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235			
PL, DG1847-1, TB-AVA-183MP(C)+			
SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-750	REV: OR
FILE: 98PL750		SCALE: 5:1	SHEET: 1 OF 1


Evaluation Board and Circuit

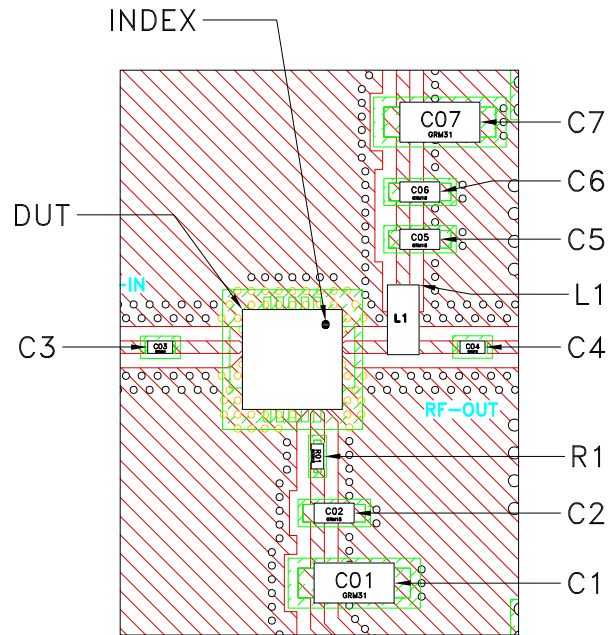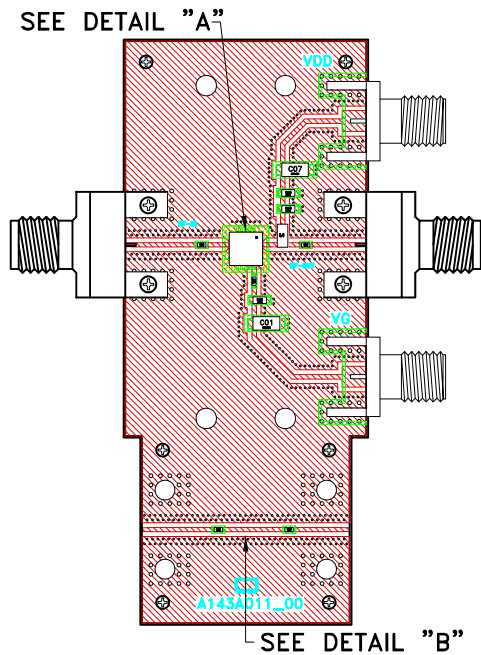

DETAIL "A"
LOCATION OF UNITS COMPONENTS
(SCALE 3:1)

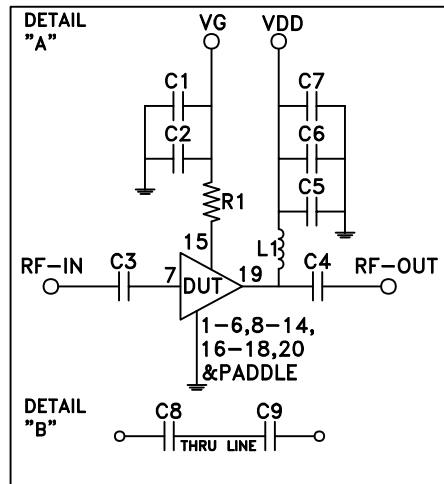

SCHEMATIC DIAGRAM

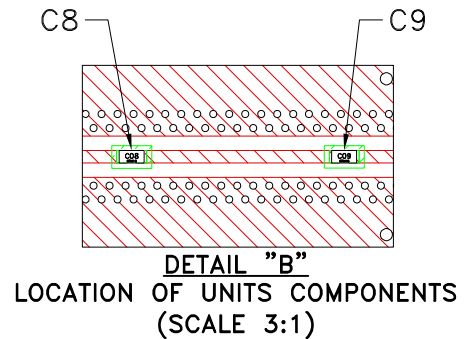

DETAIL "B"
LOCATION OF UNITS COMPONENTS
(SCALE 3:1)

Component	Size	Value	Part Number	Manufacturer
C1,C7	1206	10uF	B55-109-106K+	Samsung
C2,C6	0603	0.1uF	B55-18-104+	AVX
C5	0603	100pF	B55-19-101G+	Murata
C3,C4,C8,C9	0402	0.1uF	B55-66A-104K+	AVX
R1	0402	1kohm	B50-3A-1001+	KOA
L1	2.5mmx 3.8mm	0.6uH	B65-600-06	Piconics

Notes:

- 2.4mm Female Connectors.
- PCB Material: Roger R04350B or equivalent,
Dielectric constant=3.5, Thickness=0.010 inch

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to +85° C	Individual Model Data Sheet
Storage Temperature	-65° to 150°C	Individual Model Data Sheet
Moisture Sensitivity: Level 3	Bake at 125°C for 24 hours. Soak at 30°C/60%RH for 192 hours, Reflow 3 cycles at 260°C peak	J-STD-020D
Unbiased HAST	Temperature: 130°C, RH: 85%, Pressure: 33.3 psia Duration: 96 hours	JESD22-A118A, Test Condition A
Temperature Cycling	-65°C to +150°C, Dwell Time: 15 mins 500 cycles	JESD22-A104E, Condition C
HTSL	Temperature: 150°C Duration: 1000 hours	JESD22-A103E, Test Condition B
HTOL	1000 Hours at 125°C	JESD22-A108
ESD HBM	Refer datasheet for classification	JS-001
Vibration (Variable Frequency)	Sinusoidal vibration, 20 - 2000 Hz, 4 min sweeps, 16 min along each of 3 axis, amplitude limits of 20g and 0.06 in	MIL-STD-883, Method 2007, Condition A
Drop Test	1m drops onto concrete in final packed box in 6 orientations	--
Bend Test	1mm deflection for 5 seconds. Board thickness: 0.024", Span: 2.75"	--
Solderability	10x magnification	J-STD-002 Method B, B1



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Resistance to Soldering Heat	Sn-Pb Eutectic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020