



Mini-Circuits

MMIC SURFACE MOUNT

X3 Frequency Multiplier

CY3-223+

50Ω Output 10 to 22 GHz

THE BIG DEAL

- Ultra-wideband, output from 10 to 22 GHz
- Wide input power range, +12 to +18 dBm
- Low Conversion Loss, 17 dB Typ.
- Good Fundamental and Harmonic Suppression:
F1 > +34 dBc; F2 > +45 dBc; F4 > +50 dBc
- Tiny size, 4 x 4mm 24L



Generic photo used for illustration purposes only

CASE STYLE: DG1847

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- 5G MIMO and Back Haul Radio Systems
- Satellite Communications
- Test and Measurement Equipment
- Radar, EW, and ECM Defense Systems

PRODUCT OVERVIEW

Mini-Circuits' CY3-223+ is an ultra-wideband MMIC Frequency Tripler, converting input frequencies from 3.33 to 7.33 GHz into output frequencies from 10 to 22 GHz. Its wide output range makes this model suitable for broadband systems as well as a wide variety of narrow-band applications. Utilizing GaAs HBT technology, the multiplier comes housed in a tiny 4x4mm 24L MCLP package and offers excellent repeatability, low inductance, and good thermal efficiency.

KEY FEATURES

Feature	Advantages
Broadband, 10 to 22 GHz output	With an output frequency range spanning 10 to 22 GHz, this multiplier supports broadband applications such as defense and instrumentation as well as a wide range of narrowband system requirements including 5G.
Excellent fundamental and harmonic suppression: • F1 +34 dBc • F2 +45 dBc • F4 +50 dBc	Reduces spurious signals and the need for additional filtering.
Wide input power range, +12 to +18 dBm	Wide input power signal range accommodates different input signal levels while still maintaining a low Conversion Loss.





MMIC SURFACE MOUNT

X3 Frequency Multiplier

CY3-223+

50Ω Output 10 to 22 GHz

ELECTRICAL SPECIFICATIONS¹ AT 25°C AND Z₀ = 50Ω, UNLESS NOTED OTHERWISE

Parameter		Input Frequency (GHz)	RF Input = +12 dBm			Unit
			Min.	Typ.	Max.	
Multiplication Factor				3		
Frequency Range, Input (F1)			3.33	-	7.33	GHz
Frequency Range, Output (F3)			10	-	22	GHz
Input Power			+12	-	+18	dBm
Conversion Loss		3.33	-	22.0	26.2	dB
		4	-	18.0	22.1	
		5	-	16.4	20.4	
		6	-	18.2	23.0	
		7.33	-	22.1	27.5	
Harmonic Output ²	F1	3.33	-	45.8	-	dBc
		4	-	49.8	-	
		5	-	46.6	-	
		6	-	44.9	-	
		7.33	-	22.1	-	
	F2	3.3	-	86.1	-	dBc
		4	-	71.9	-	
		5	-	55.1	-	
		6	-	45.0	-	
		7.33	-	39.9	-	
	F4	3.33	-	47.9	-	dBc
		4	-	48.9	-	
		5	-	56.2	-	
		6	-	51.7	-	
		7.33	-	40.9	-	

1. Measured on Mini-Circuits Characterization Test Board TB-CY3-223C+.

2. Harmonics of input frequency below the power level of F3.

MAXIMUM RATINGS³

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Input RF Power	+22 dBm (5 minute max) +19 dBm (Continuous)

3. Permanent damage may occur if any of these limits are exceeded.





Mini-Circuits



MMIC SURFACE MOUNT

X3 Frequency Multiplier

CY3-223+

50Ω Output 10 to 22 GHz

SIMPLIFIED SCHEMATIC AND PAD DESCRIPTION

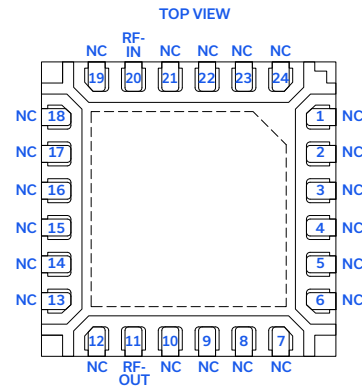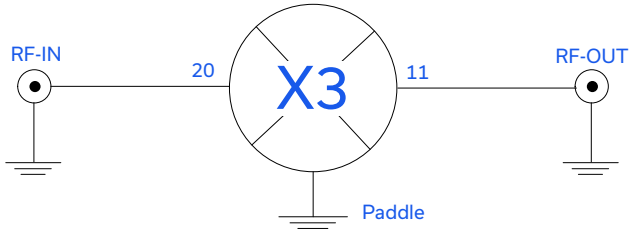

Function	Pad Number	Description
RF-IN	20	RF-Input Pad.
RF-OUT	11	RF-Output Pad.
Ground	Paddle	Connects to ground
No Connections	1-10, 12-19, 21-24	Not used internally. Connected to ground on test board.

APPLICATION AND CHARACTERIZATION CIRCUIT


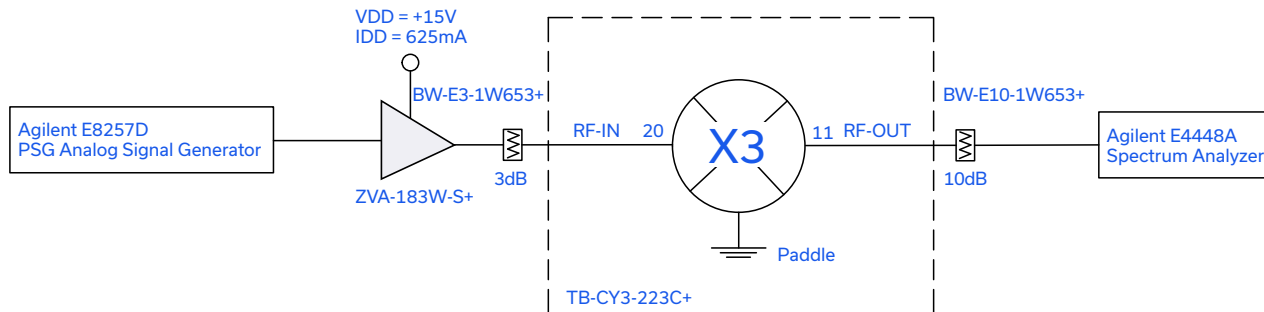


Fig 1. Application and Characterization Circuit

Note: This block diagram is used for characterization. (DUT is soldered and measured on Mini-Circuits Characterization Test Board TB-CY3-223C+) Conversion Loss and Harmonic Output are measured using Agilent E4448A PSA Spectrum Analyzer.

PRODUCT MARKING

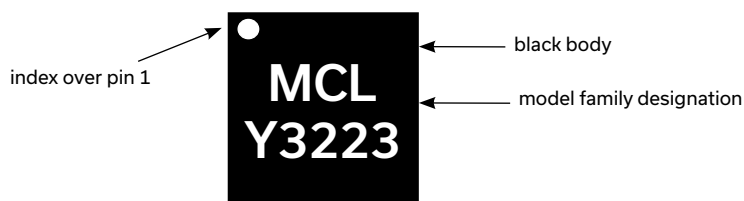

Marking may contain other features or characters for internal lot control





MMIC SURFACE MOUNT

X3 Frequency Multiplier


CY3-223+

Mini-Circuits


50Ω Output 10 to 22 GHz

TYPICAL PERFORMANCE CURVES


Conversion Loss X3 Output
Temperature = +25°C

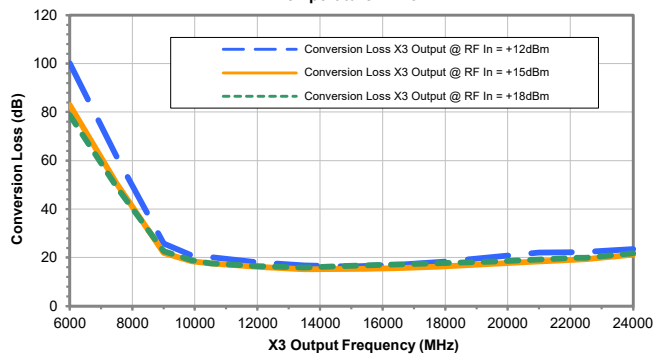


Harmonic X1 Output
Temperature = +25°C

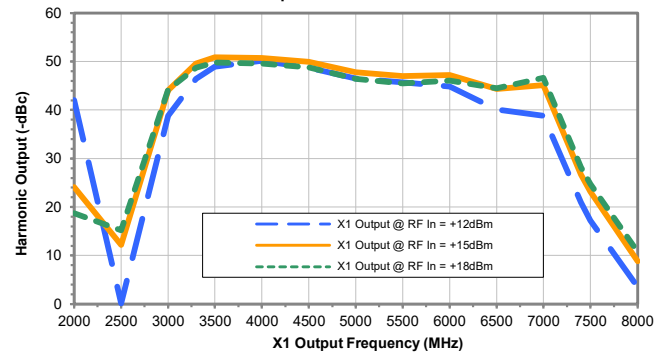

Harmonic X2 Output
Temperature = +25°C

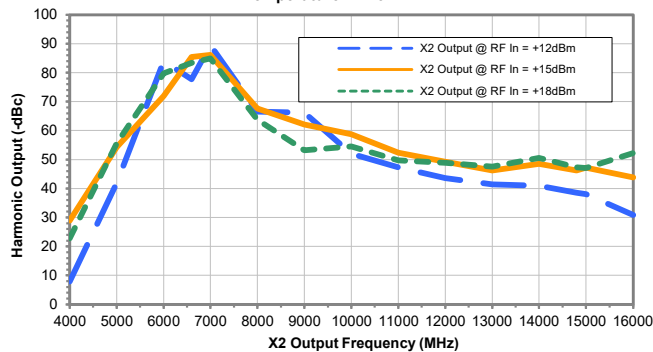

Harmonic X4 Output
Temperature = +25°C

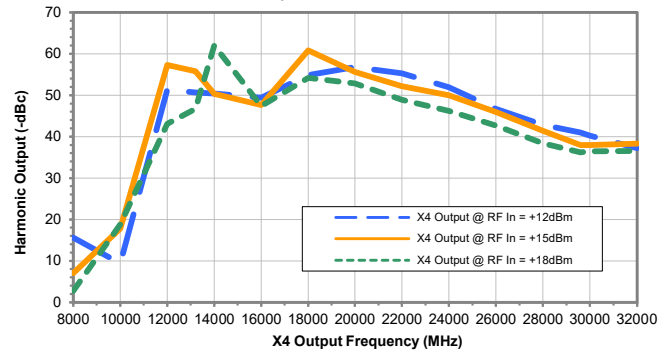



MMIC SURFACE MOUNT


X3 Frequency Multiplier

CY3-223+


50Ω Output 10 to 22 GHz

TYPICAL PERFORMANCE CURVES


Conversion Loss X3 Output
RF In = +12dBm

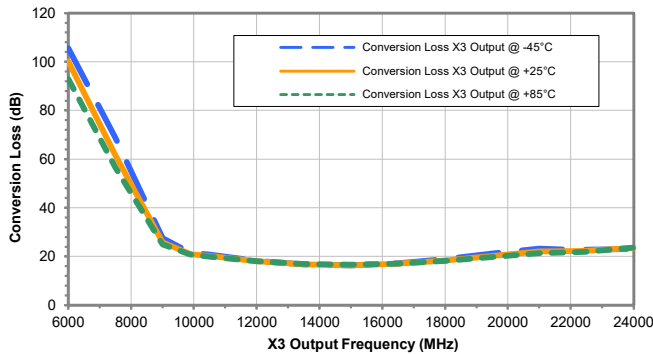


Harmonic X1 Output
RF In = +12dBm

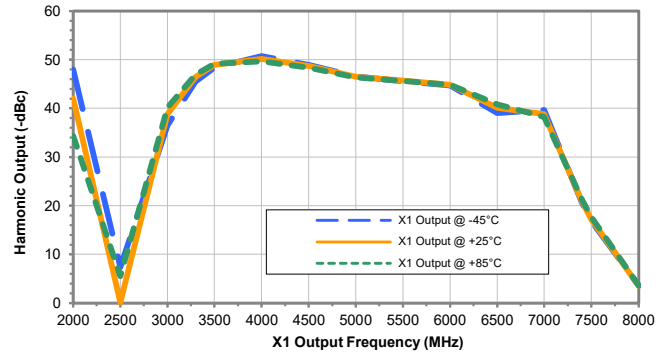

Harmonic X2 Output
RF In = +12dBm

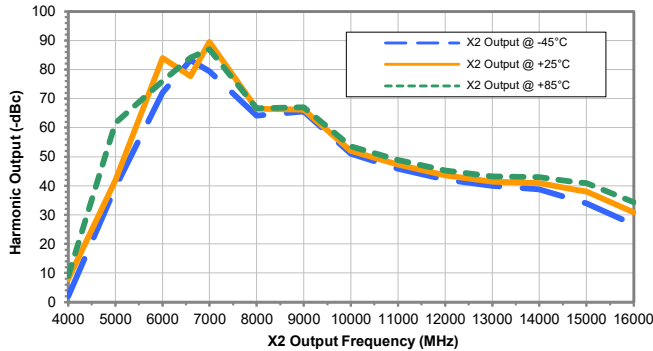

Harmonic X4 Output
RF In = +12dBm

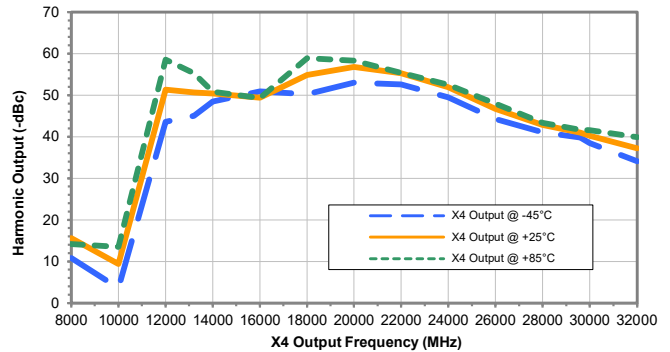



MMIC SURFACE MOUNT

X3 Frequency Multiplier


CY3-223+

Mini-Circuits


50Ω Output 10 to 22 GHz

TYPICAL PERFORMANCE CURVES


Conversion Loss X3 Output
RF In = +15dBm

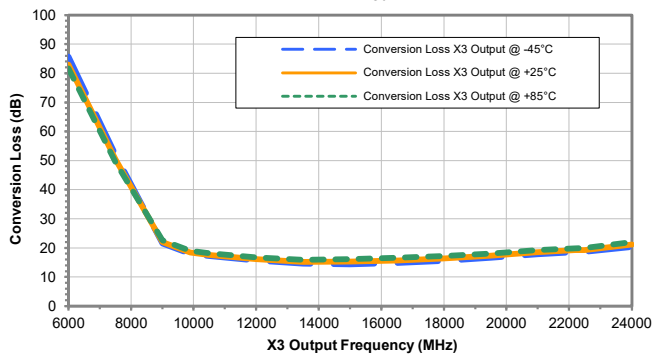


Harmonic X1 Output
RF In = +15dBm

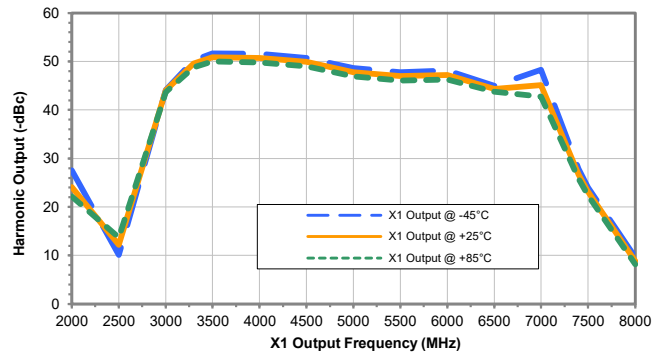

Harmonic X2 Output
RF In = +15dBm

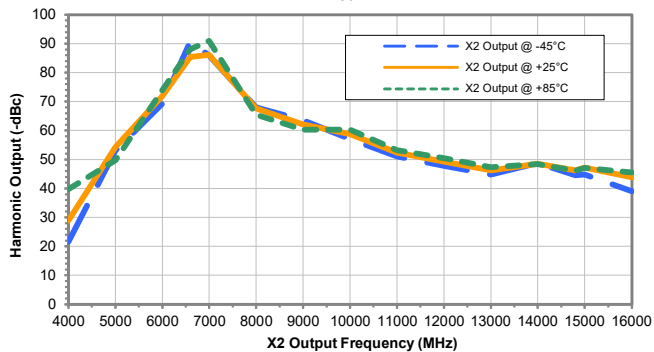

Harmonic X4 Output
RF In = +15dBm

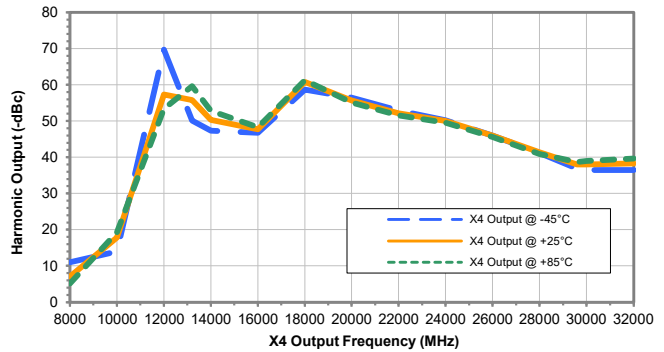



MMIC SURFACE MOUNT

X3 Frequency Multiplier


CY3-223+

Mini-Circuits


50 Ω Output 10 to 22 GHz

TYPICAL PERFORMANCE CURVES


Conversion Loss X3 Output
RF In = +18dBm

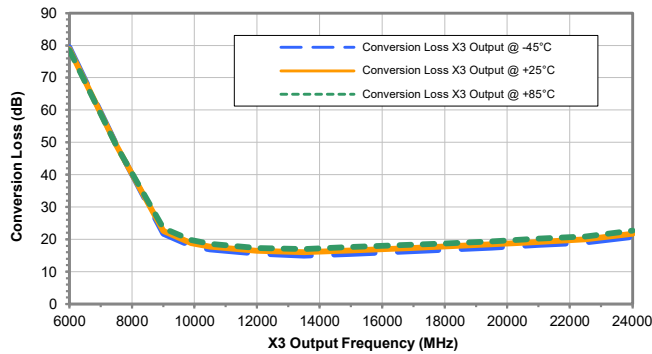


Harmonic X1 Output
RF In = +18dBm

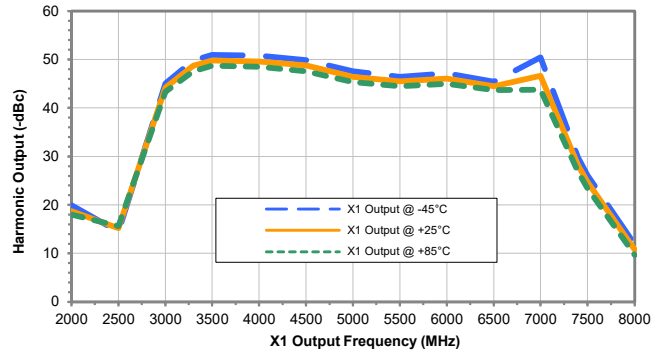

Harmonic X2 Output
RF In = +18dBm

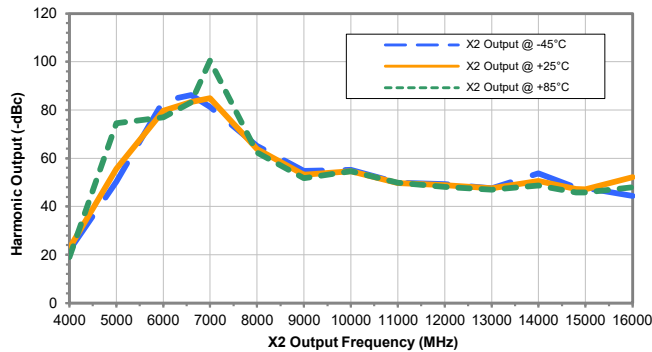

Harmonic X4 Output
RF In = +18dBm

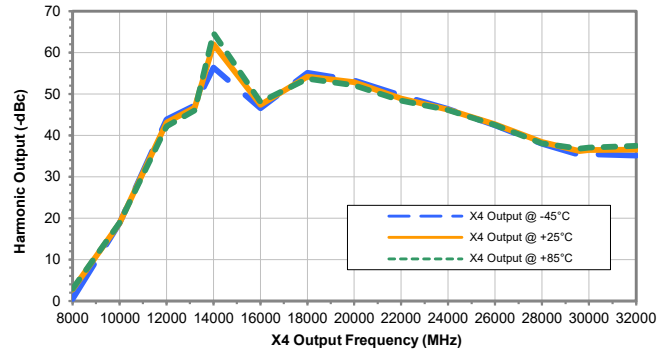



Mini-Circuits

MMIC SURFACE MOUNT

X3 Frequency Multiplier

CY3-223+

50Ω Output 10 to 22 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS [CLICK HERE](#)

Performance Data	Data Table
	Swept Graphs
Case Style	DG1847 Plastic package, exposed paddle, lead finish: Matte-Tin
Tape & Reel	F68
Standard quantities available on reel	7" reels with 20, 50, 100, 200, 500 or 1K and 2k devices
Suggested Layout for PCB Design	PL-732
Evaluation Board	TB-CY3-223C+
Environmental Ratings	ENV08T1

ESD RATING


Human body model (HBM): Class 1B (500V to < 1000V) in accordance with ANSI/ESD 5.1-2001

Charged Device Model (CDM): Class 1B (500V to < 1000V) in accordance with ANSI/ESD 5.2-2001

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

MSL TEST FLOW CHART

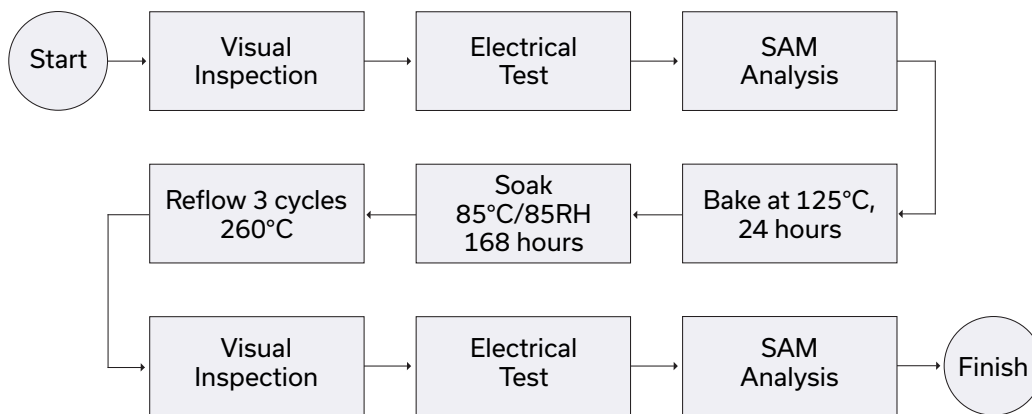

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained there in. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp
- Mini-Circuits does not warrant the accuracy or completeness of the information, text, graphics and other items contained within this document and same are provided as an accommodation and on an As is basis, with all faults.
- Purchasers of this part are solely responsible for proper storing, handling, assembly and processing of Known Good Dice (including, without limitation, proper ESD preventative measures, die preparation, die attach, wire bonding and related assembly and test activities), and Mini-Circuits assumes no responsibility therefor or for environmental effects on Known Good Dice.
- Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation by any such third-party of Mini-Circuits or its products.



Typical Performance Data

TEST CONDITION: RF In = +12dBm

Frequency (MHz)				Temperature = -45°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	105.68	47.98	2.04	10.80
2500	5000	7500	10000	68.79	7.41	39.47	3.64
3000	6000	9000	12000	27.48	36.51	72.08	43.55
3300	6600	9900	13200	21.57	45.47	83.28	45.05
3500	7000	10500	14000	20.72	48.32	79.44	48.50
4000	8000	12000	16000	18.18	50.78	64.14	50.86
4500	9000	13500	18000	16.75	48.96	65.55	50.21
5000	10000	15000	20000	16.45	46.56	51.06	53.06
5500	11000	16500	22000	17.15	45.57	45.84	52.58
6000	12000	18000	24000	18.92	44.67	42.14	49.44
6500	13000	19500	26000	21.20	39.02	39.95	44.29
7000	14000	21000	28000	23.18	39.69	38.77	41.03
7400	14800	22200	29600	22.60	20.65	34.95	39.80
7500	15000	22500	30000	22.75	16.84	33.95	38.50
8000	16000	24000	32000	23.04	3.61	26.62	34.09

* Harmonic Output below power level of X3 Output

Frequency (MHz)				Temperature = +25°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	100.27	42.05	7.99	15.63
2500	5000	7500	10000	61.52	0.18	41.88	9.42
3000	6000	9000	12000	25.79	38.77	84.02	51.33
3300	6600	9900	13200	21.00	46.41	77.74	50.62
3500	7000	10500	14000	20.19	48.92	89.56	50.36
4000	8000	12000	16000	18.03	50.19	66.52	49.41
4500	9000	13500	18000	16.75	48.72	66.21	54.90
5000	10000	15000	20000	16.47	46.51	52.02	56.87
5500	11000	16500	22000	17.02	45.68	47.29	55.27
6000	12000	18000	24000	18.41	44.86	43.54	51.93
6500	13000	19500	26000	20.23	40.10	41.39	46.73
7000	14000	21000	28000	22.12	38.80	40.96	42.84
7400	14800	22200	29600	22.28	20.92	38.58	40.97
7500	15000	22500	30000	22.42	17.22	38.01	40.19
8000	16000	24000	32000	23.47	3.50	30.83	37.19

* Harmonic Output below power level of X3 Output

Frequency (MHz)				Temperature = +85°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	93.07	34.33	9.05	14.15
2500	5000	7500	10000	56.54	5.49	61.68	13.55
3000	6000	9000	12000	24.90	40.14	76.07	58.53
3300	6600	9900	13200	20.75	46.94	84.05	55.27
3500	7000	10500	14000	19.93	49.11	87.03	50.86
4000	8000	12000	16000	18.03	49.66	66.73	49.35
4500	9000	13500	18000	16.88	48.36	66.97	58.89
5000	10000	15000	20000	16.65	46.35	53.54	58.34
5500	11000	16500	22000	17.13	45.59	48.86	55.33
6000	12000	18000	24000	18.21	44.84	45.33	52.52
6500	13000	19500	26000	19.72	40.84	43.18	47.92
7000	14000	21000	28000	21.41	38.24	42.97	43.33
7400	14800	22200	29600	21.84	21.32	41.21	41.67
7500	15000	22500	30000	22.00	17.71	40.99	41.57
8000	16000	24000	32000	23.69	3.59	34.34	39.91

* Harmonic Output below power level of X3 Output

Typical Performance Data

TEST CONDITION: RF In = +15dBm

Frequency (MHz)				Temperature = -45°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	85.75	27.55	21.61	11.05
2500	5000	7500	10000	52.04	10.14	53.08	13.95
3000	6000	9000	12000	21.53	44.08	69.33	69.72
3300	6600	9900	13200	17.89	50.19	90.75	50.15
3500	7000	10500	14000	17.15	51.72	85.86	47.32
4000	8000	12000	16000	15.66	51.60	67.96	46.78
4500	9000	13500	18000	14.63	50.75	63.56	58.65
5000	10000	15000	20000	14.44	48.66	57.00	56.46
5500	11000	16500	22000	14.82	47.80	51.03	52.86
6000	12000	18000	24000	15.57	48.11	47.82	50.23
6500	13000	19500	26000	16.60	44.96	44.81	45.93
7000	14000	21000	28000	17.82	48.25	48.71	41.21
7400	14800	22200	29600	18.47	27.81	44.55	36.84
7500	15000	22500	30000	18.60	24.06	44.77	36.47
8000	16000	24000	32000	20.35	9.64	39.08	36.47

* Harmonic Output below power level of X3 Output

Frequency (MHz)				Temperature = +25°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	82.99	24.10	28.94	7.09
2500	5000	7500	10000	50.46	12.20	54.28	17.80
3000	6000	9000	12000	21.98	44.02	72.01	57.31
3300	6600	9900	13200	18.44	49.57	85.40	55.80
3500	7000	10500	14000	17.61	50.91	86.22	50.32
4000	8000	12000	16000	16.15	50.70	67.59	47.66
4500	9000	13500	18000	15.26	49.90	62.09	60.84
5000	10000	15000	20000	15.28	47.79	58.71	55.63
5500	11000	16500	22000	15.70	46.98	52.32	52.13
6000	12000	18000	24000	16.36	47.19	49.29	49.97
6500	13000	19500	26000	17.33	44.30	46.24	45.95
7000	14000	21000	28000	18.54	45.09	48.52	41.39
7400	14800	22200	29600	19.26	26.72	46.21	38.00
7500	15000	22500	30000	19.28	23.17	47.25	37.99
8000	16000	24000	32000	21.20	8.86	43.86	38.30

* Harmonic Output below power level of X3 Output

Frequency (MHz)				Temperature = +85°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	81.68	22.17	39.82	5.17
2500	5000	7500	10000	49.45	13.68	49.68	19.25
3000	6000	9000	12000	22.55	43.70	74.02	53.37
3300	6600	9900	13200	19.04	48.78	88.11	59.62
3500	7000	10500	14000	18.12	50.01	90.96	52.80
4000	8000	12000	16000	16.72	49.82	65.48	48.26
4500	9000	13500	18000	15.98	48.99	60.26	61.34
5000	10000	15000	20000	16.15	46.88	60.25	55.10
5500	11000	16500	22000	16.57	46.09	53.24	51.58
6000	12000	18000	24000	17.16	46.24	50.47	49.50
6500	13000	19500	26000	18.10	43.74	47.30	45.63
7000	14000	21000	28000	19.24	42.74	48.37	40.88
7400	14800	22200	29600	19.88	25.79	46.06	38.70
7500	15000	22500	30000	19.91	22.36	47.05	39.00
8000	16000	24000	32000	21.95	8.17	45.53	39.64

* Harmonic Output below power level of X3 Output

Typical Performance Data

TEST CONDITION: RF In = +18dBm

Frequency (MHz)				Temperature = -45°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	79.49	19.93	21.90	0.51
2500	5000	7500	10000	49.27	14.51	50.23	18.76
3000	6000	9000	12000	21.73	45.07	83.75	43.88
3300	6600	9900	13200	17.93	49.82	86.25	47.24
3500	7000	10500	14000	16.84	50.99	81.28	56.42
4000	8000	12000	16000	15.54	50.83	65.22	46.51
4500	9000	13500	18000	15.04	49.84	54.81	55.15
5000	10000	15000	20000	15.53	47.54	55.16	53.27
5500	11000	16500	22000	16.12	46.40	49.83	49.68
6000	12000	18000	24000	16.79	47.10	49.35	46.34
6500	13000	19500	26000	17.44	45.40	47.56	42.42
7000	14000	21000	28000	18.26	50.42	53.80	37.97
7400	14800	22200	29600	18.86	29.76	47.91	35.29
7500	15000	22500	30000	18.99	26.08	47.74	35.41
8000	16000	24000	32000	20.72	11.89	44.34	35.14

* Harmonic Output below power level of X3 Output





Frequency (MHz)				Temperature = +25°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	78.88	18.70	22.83	2.75
2500	5000	7500	10000	49.02	15.17	55.61	18.79
3000	6000	9000	12000	22.59	44.17	79.78	43.06
3300	6600	9900	13200	18.87	48.68	83.36	46.70
3500	7000	10500	14000	17.70	49.86	85.00	62.08
4000	8000	12000	16000	16.43	49.56	63.79	47.39
4500	9000	13500	18000	16.05	48.82	53.15	54.21
5000	10000	15000	20000	16.59	46.43	54.56	52.84
5500	11000	16500	22000	17.15	45.46	49.78	48.86
6000	12000	18000	24000	17.77	46.06	48.83	46.19
6500	13000	19500	26000	18.40	44.44	47.60	42.63
7000	14000	21000	28000	19.26	46.60	50.57	38.41
7400	14800	22200	29600	19.93	28.22	47.33	36.18
7500	15000	22500	30000	19.96	24.71	47.08	36.44
8000	16000	24000	32000	21.75	10.77	52.20	36.53

* Harmonic Output below power level of X3 Output





Frequency (MHz)				Temperature = +85°C			
				Conversion Loss (dB)	Harmonic Output* (-dBc)		
X1 Output	X2 Output	X3 Output	X4 Output	X3 Output	X1 Output	X2 Output	X4 Output
2000	4000	6000	8000	78.66	18.00	19.10	2.97
2500	5000	7500	10000	48.91	15.63	74.58	18.86
3000	6000	9000	12000	23.49	43.36	76.95	42.14
3300	6600	9900	13200	19.80	47.56	83.16	46.03
3500	7000	10500	14000	18.58	48.73	100.57	64.70
4000	8000	12000	16000	17.36	48.50	62.40	48.08
4500	9000	13500	18000	17.07	47.60	51.68	53.69
5000	10000	15000	20000	17.64	45.34	54.58	52.10
5500	11000	16500	22000	18.16	44.50	49.80	48.37
6000	12000	18000	24000	18.74	44.99	48.13	46.13
6500	13000	19500	26000	19.36	43.68	47.02	42.48
7000	14000	21000	28000	20.20	43.78	48.73	38.06
7400	14800	22200	29600	20.81	26.85	45.77	36.75
7500	15000	22500	30000	20.84	23.49	45.79	37.05
8000	16000	24000	32000	22.69	9.72	47.94	37.44

* Harmonic Output below power level of X3 Output





Typical Performance Curves

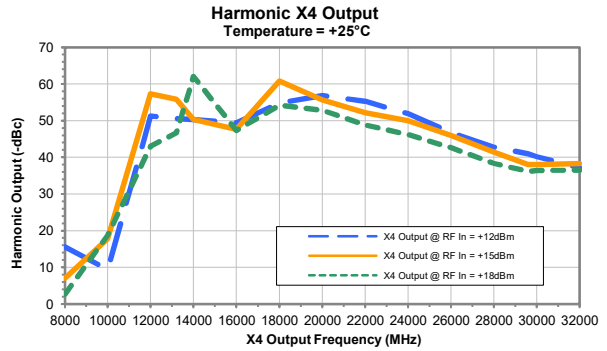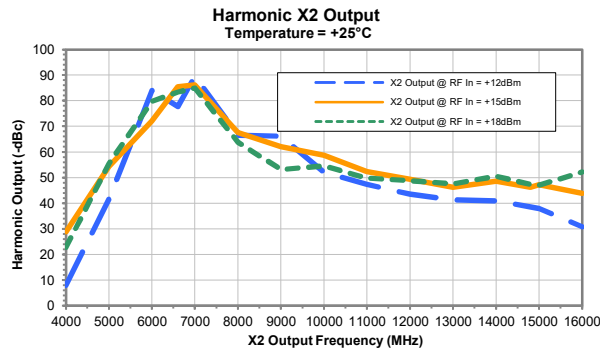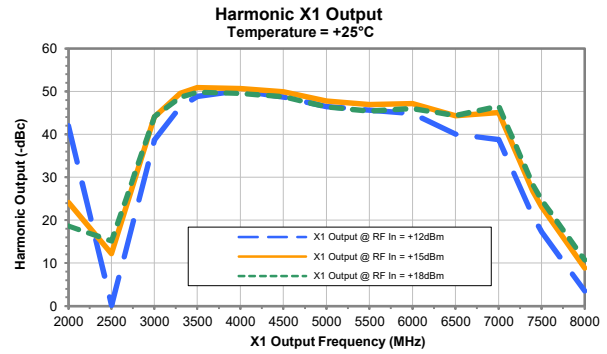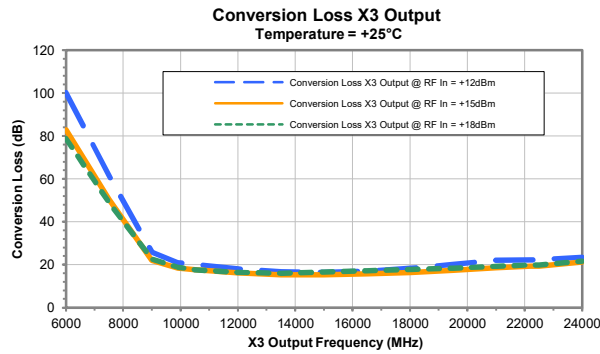





Typical Performance Curves

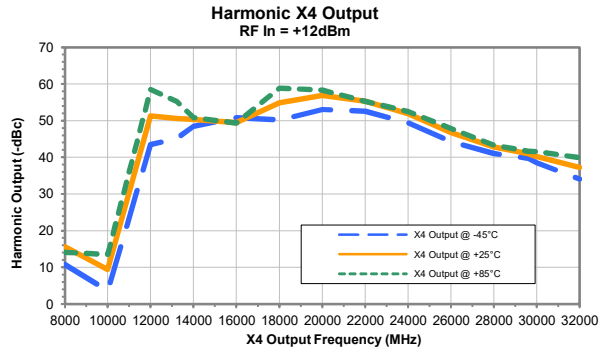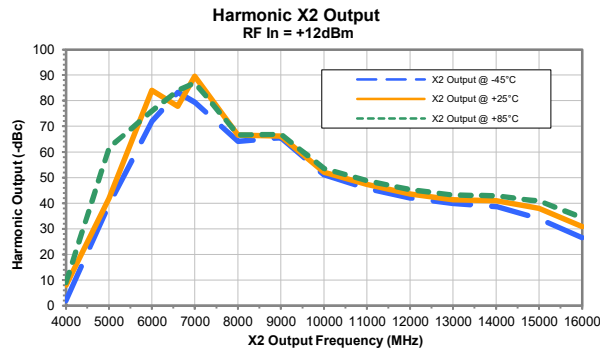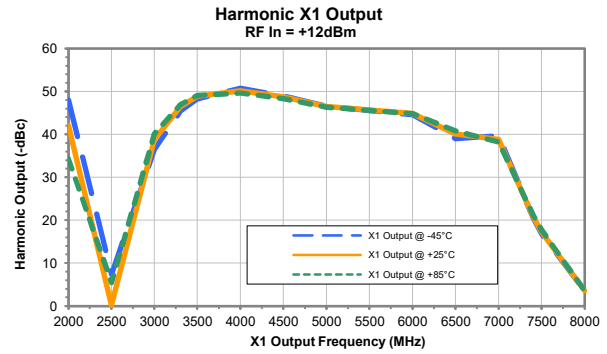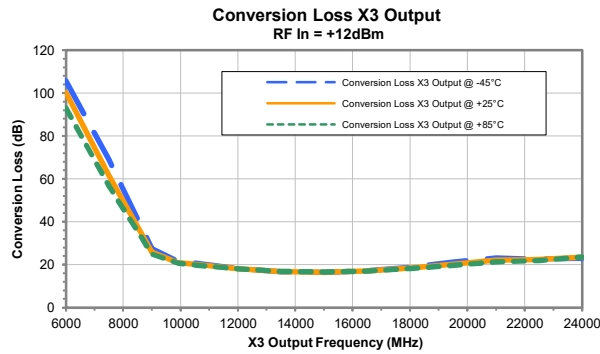


Typical Performance Curves

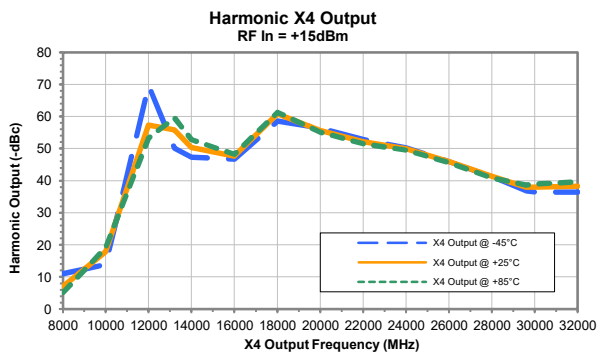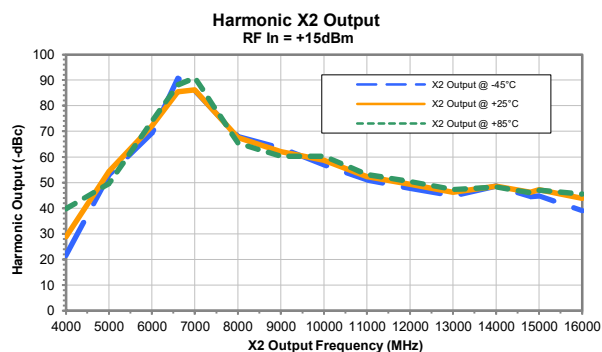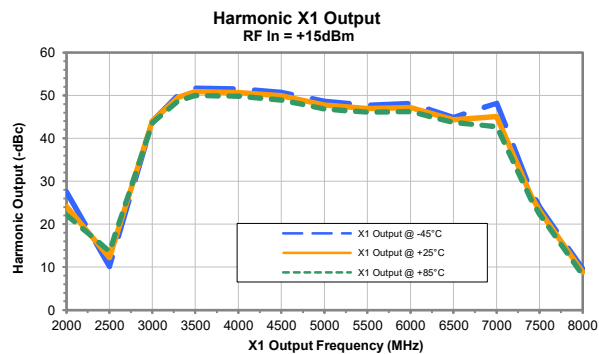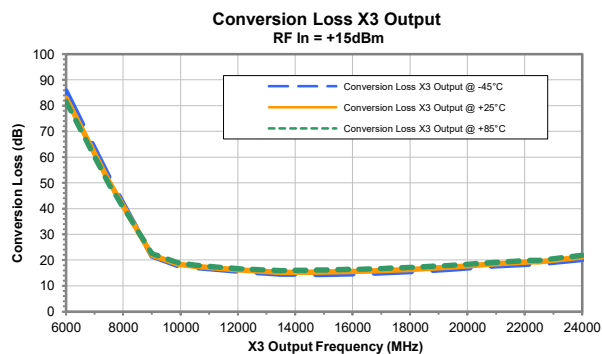

Typical Performance Curves

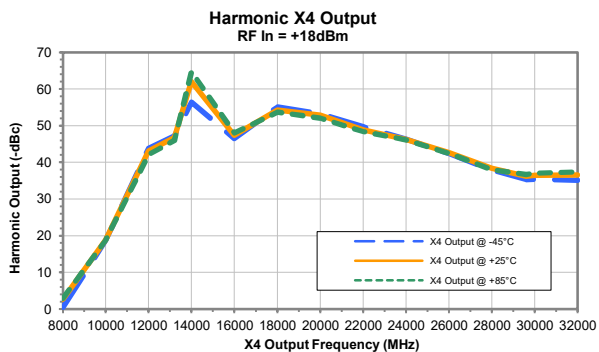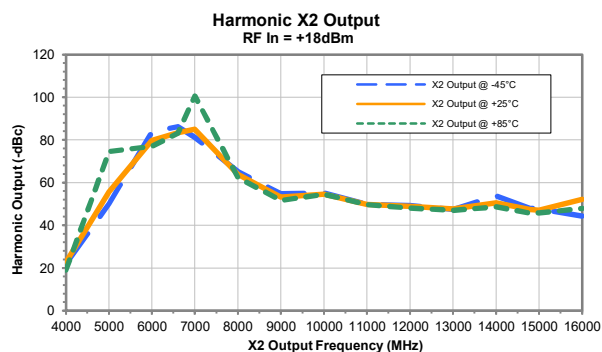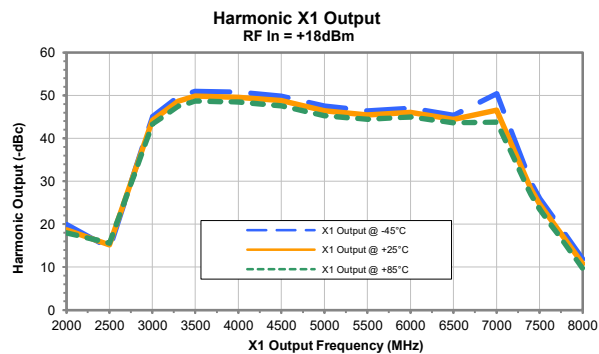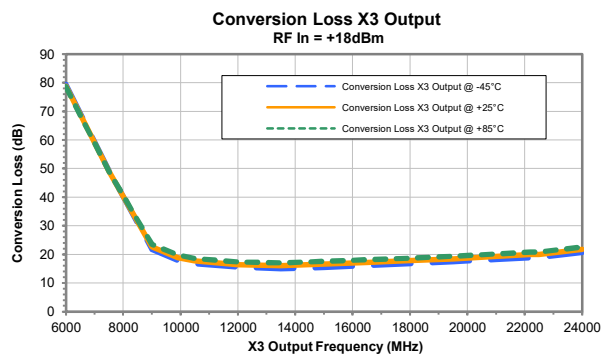

Outline Dimensions

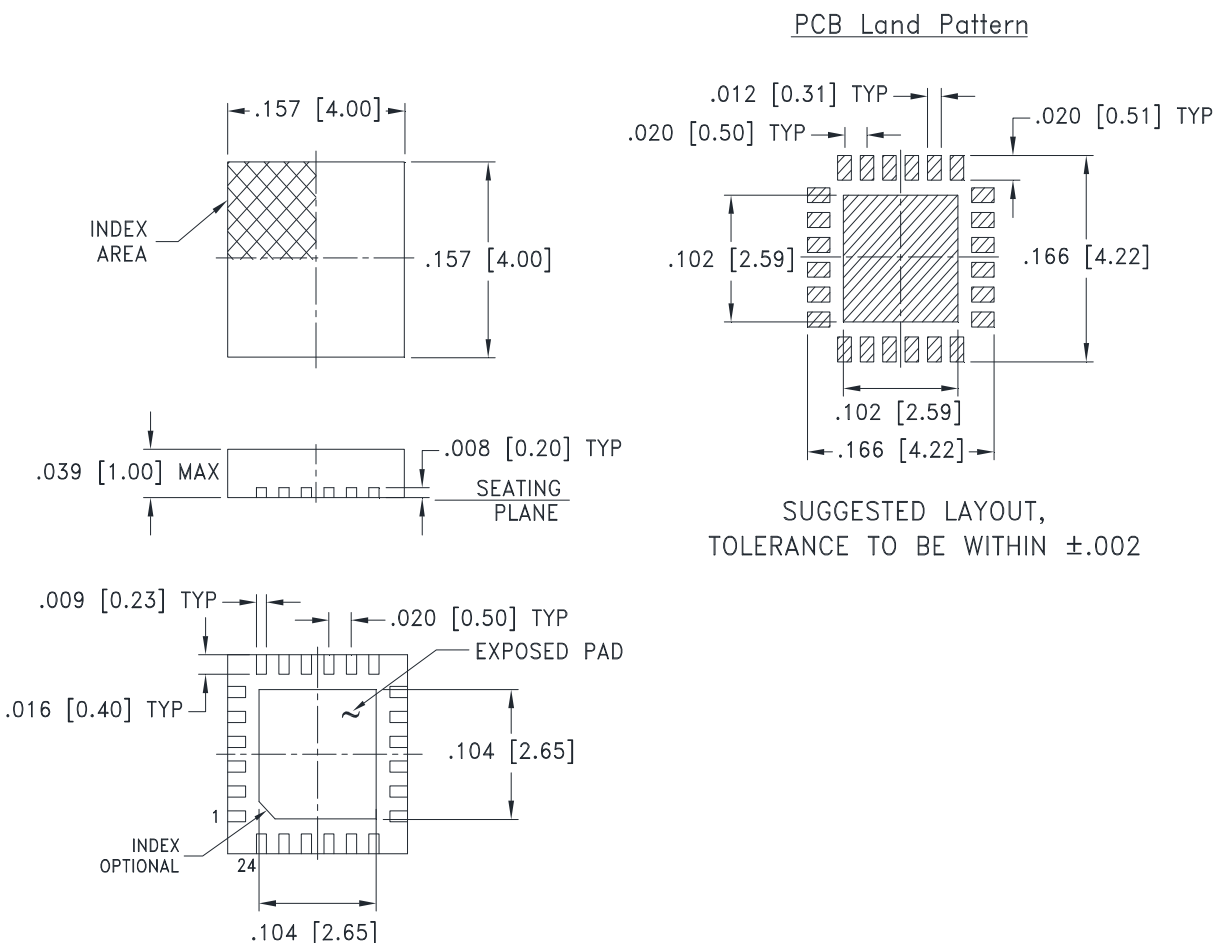

Weight: .04 Grams

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Case material: Plastic.
2. Termination finish:

For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
All models, (+) suffix. See model Data sheet.

For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


RF/IF MICROWAVE COMPONENTS

DG1847 Rev.: AH (16 FEB 23) ECO-016811 File: DG1847

This document and its contents are the property of Mini-Circuits.

Sheet 1 of 1

Tape & Reel Packaging TR-F68

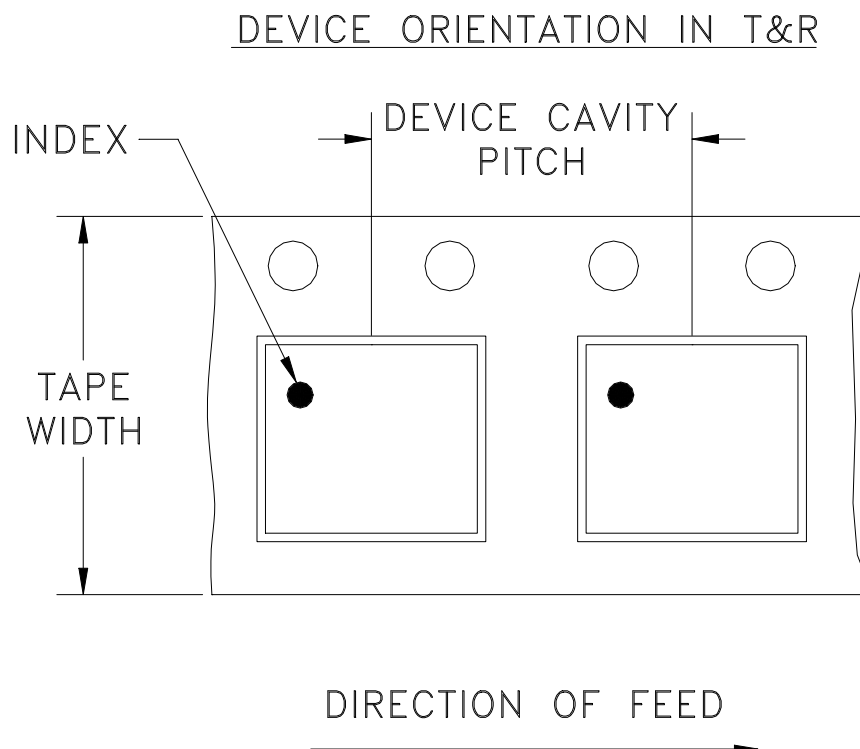

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
12	8	7	Small quantity standard	20
				50
				100
				200
				500
		7	Standard	1000
		13	Standard	2000
				3000
				4000

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • **EUROPE** 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-013714	NEW RELEASE	06/13/22	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR

DG1847 CASE STYLE

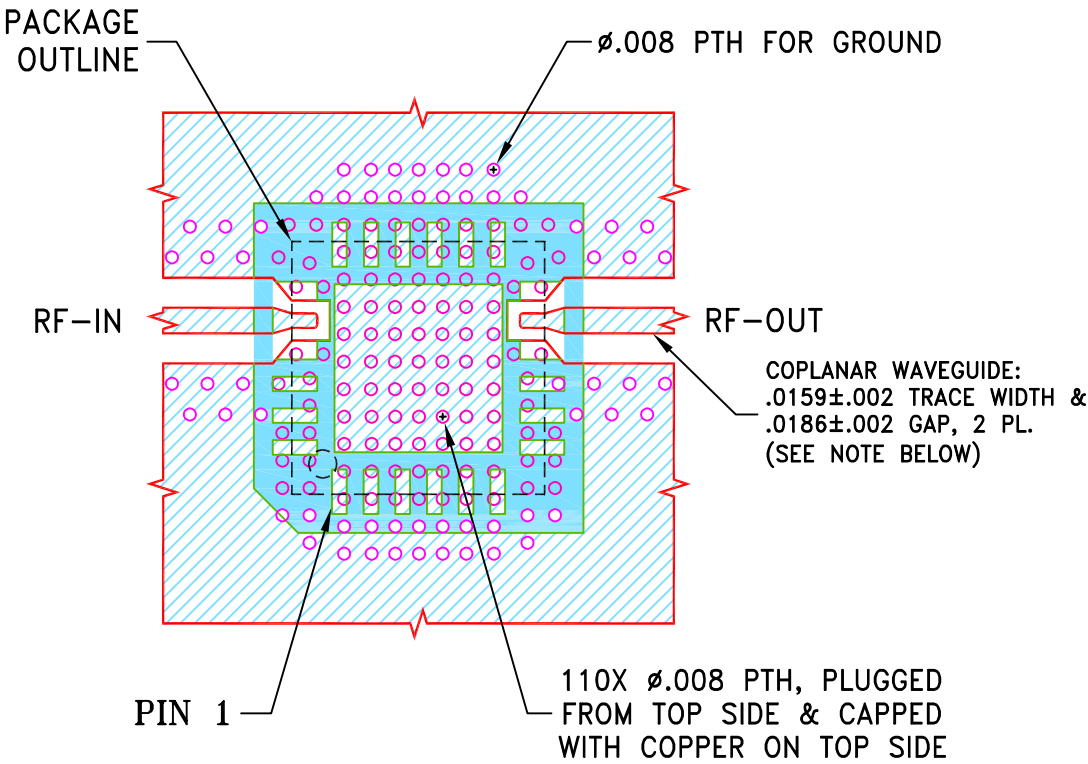

NOTES:

1. TRACE WIDTH AND GAP PARAMETERS ARE SHOWN FOR ROGERS RO4003 WITH DIELECTRIC THICKNESS .008±.0007"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.

2. UNIT FOOT PRINT IS OPTIMIZED FOR PERFORMANCE AND IS DIFFERENT FROM CASE STYLE DG1847 RECOMMENDATIONS.

3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ±	INITIALS		DATE	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235 PL, DG1847, TB-CY3-223(C)+			
	DRAWN	ITG	06/13/22				
	CHECKED	GF	06/13/22				
	APPROVED	IL	06/13/22				
Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.				SIZE	CODE IDENT	DRAWING NO:	REV:
				A	15542	98-PL-732	OR
ASHEETA1.DWG REV:A DATE:01/12/95				FILE:	98PL732	SCALE: 8:1	SHEET: 1 OF 1

Evaluation Board and Circuit


SEE DETAIL "A"

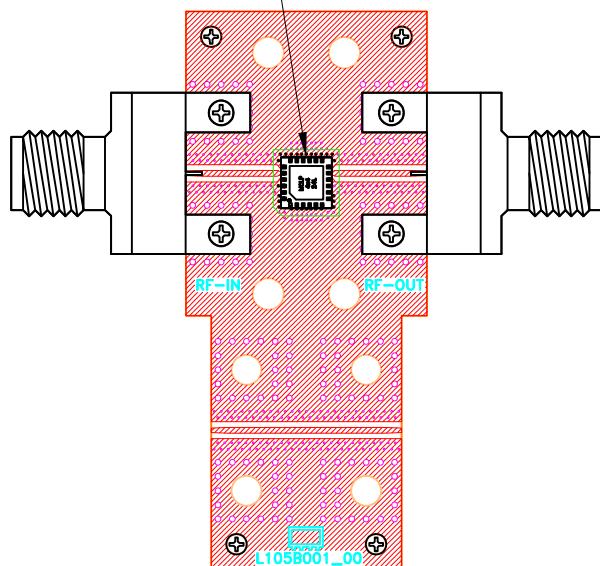

INDEX

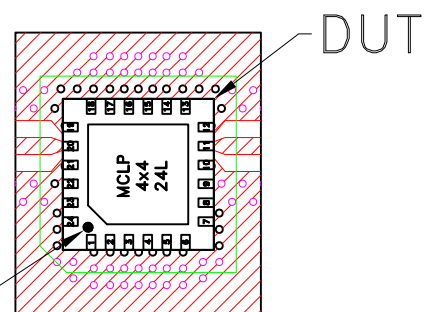

DETAIL "A"
(SCALE 3:1)

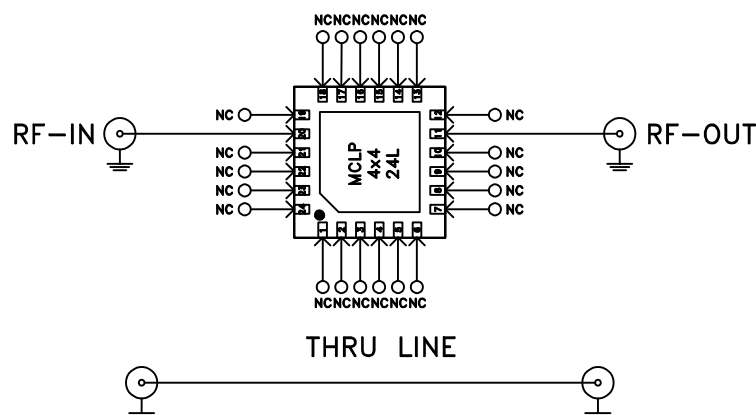

SCHEMATIC DIAGRAM
(SCALE 3:1)

Function	Pad
RF-IN	20
RF-OUT	11
NC	1-10,12-19,21-24

NOTES:

- 2.4mm Female Connectors.
- PCB Material: Roger R04350B or equivalent,
Dielectric constant=3.5, Thickness=0.008 inch

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C or -45° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether +	MIL-STD-202, Method 215



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	