

Low Noise, High IP3

Monolithic Amplifier Die


PSA4-5043-D+

50Ω

0.05 to 4 GHz

The Big Deal

- Ultra Low Noise Figure, 0.75 dB
- High IP3 and Pout at low DC power consumption
- Class 1B HBM ESD rating (500V)



Product Overview

Mini-Circuits PSA4-5043-D+ is a E-PHEMT based Ultra-Low Noise MMIC Amplifier die operating from 50 MHz to 4 GHz with a unique combination of low noise and high IP3 making this amplifier ideal for sensitive high dynamic range receiver applications. This design operates on +3 to +5V supply at only 33 mA at 3V and 56mA at +5V, is internally matched to 50 ohms.

Key Features

Feature	Advantages
Ultra Low Noise: 0.8 dB at 1 GHz 1.0 dB at 2 GHz	Outstanding Noise Figure, measured in a 50 Ohm environment without any external matching
High IP3, 34 dBm at 1.0 GHz	Combining Low Noise and High IP3 makes this MMIC amplifier ideal for Low Noise Receiver Front End (RFE) because it gives the user advantages at both ends of the dynamic range: sensitivity & two-tone spur-free dynamic range
High Output Power, +20 dBm at 2 GHz	The PSA4-5043-D+ provides up to +20dBm output power at 1dB compression enabling this amplifier to support high linear dynamic range requirements.-
Broad Band, up to 4 GHz	Operating over a broadband from 50 MHz to 4 GHz, the PSA4-5043-D+ covers the primary wireless communications bands: Cellular, PCS, LTE, WiMAX
Internally Matched	No external matching elements required to achieve the advertised noise and output power over the full band
High Reliability	Low, small signal operating current of 53mA nominal maintains junction temperatures typically below 107°C at 85°C at bottom of die
Class 1B ESD (500V, HBM)	The PSA4-5043-D+ is a super low noise PHEMT based design. Unlike many other PHEMT designs. Mini-Circuits incorporates ESD protection on die to achieve industry leading ESD performance for a low noise amplifier.



Low Noise, High IP3

Monolithic Amplifier Die

PSA4-5043-D+

50Ω

0.05 to 4 GHz

Product Features


- Ultra Low Noise Figure, 0.8 dB typ. at 1 GHz
- Class 1B ESD rating (500V)
- High IP3, up to 34 dBm typ. at 1 GHz
- Output Power at 1dB comp., up to +20 dBm typ. at 2 GHz
- Gain, 18.4 dB typ. at 1GHz
- Supply Voltage, +3V, Id=33mA, +5V, Id=56mA
- Aqueous washable

Typical Applications

- Cellular
- ISM
- GSM
- WCDMA
- LTE
- WiMax
- WLAN
- GPS

General Description

PSA4-5043-D+ is an advanced wide band, high dynamic range, low noise, high IP3, high output power, monolithic amplifier die. Manufactured using E-PHEMT* technology enables it to work with a single positive supply voltage.




+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Ordering Information: Refer to Last Page

Simplified Schematic and Pad description

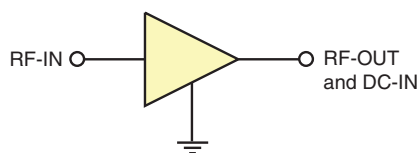

Pad	Description (See Application Circuit, Fig. 2)
RF IN	RF input pin (connect to RF-IN via DC blocking cap)
RF-OUT & DC-IN	RF output pin (connected to RF-out via blocking cap C2 and supply voltage Vd via RF Choke L1)
GND	Connections to ground: use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.

* Enhancement mode pseudomorphic High Electron Mobility Transistor.

Note: 1. Bond Pad material - Gold
2. Bottom of Die - Gold plated



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M167172
PSA4-5043-D+
RS/TH/CP
180428
Page 2 of 6

Electrical Specifications¹ at 25°C, $Z_0=50\Omega$, (refer to characterization circuit, Fig. 1)

Parameter	Condition (GHz)	Vd=5.0V ¹			Vd=3.0V ¹			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range		0.05		4.0	0.05		4.0	GHz
at DC Volts (Vd)			5.0			3.0		V
DC Current (Id)		40	58	66		33		mA
Noise Figure	0.05		0.64			0.57		dB
	0.5		0.75			0.75		
	1.0		0.82			0.83		
	2.0		1.0			1.0		
	3.0		1.3			1.27		
	4.0		1.6			1.55		
Gain	0.05		25.2			24.0		dB
	0.5		22.0			21.0		
	1.0		18.4			17.6		
	2.0		13.3			12.7		
	3.0		10.1			9.5		
	4.0		7.8			7.3		
Input Return Loss	0.05		7.4			6.5		dB
	0.5		10.8			9.5		
	1.0		11.5			10.2		
	2.0		12.5			11.0		
	3.0		10.9			9.7		
	4.0		11.1			9.7		
Output Return Loss	0.05		12.4			11.4		dB
	0.5		16.2			16.8		
	1.0		14.2			16.5		
	2.0		13.6			17.3		
	3.0		14.5			19.3		
	4.0		12.6			16.6		
Output IP3	0.05		32.2			27.6		dBm
	0.5		33.3			28.0		
	1.0		34.0			28.5		
	2.0		34.6			29.5		
	3.0		33.9			29.4		
	4.0		32.6			28.5		
Output Power @ 1dB compression ²	0.05		18.1			14.9		dBm
	0.5		18.7			15.5		
	1.0		19.0			16.4		
	2.0		19.9			18.1		
	3.0		20.3			18.5		
	4.0		20.2			18.8		
DC Current Variation Vs. Voltage			0.01			0.01		mA/mV
Thermal Resistance ³			67			67		°C/W

1. Measured on Mini-Circuits Die Characterization test board. See Characterization Test Circuit (Fig. 1)

2. Current increases at P1dB

3. Defined with reference to ground pad temperature measured in industry standard SOT-343 package.

Absolute Maximum Ratings⁴

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Channel Temperature	150°C
DC Voltage	6V
Device Current	76 mA
Power Dissipation	380 mW
Input Power (CW)	23 dBm (5 minutes max), 17dBm (continuous)

4. Permanent damage may occur if any of these limits are exceeded.

These maximum ratings are not intended for continuous normal operation.

Measured in industry standard SOT-343 package.

Characterization Test Circuit

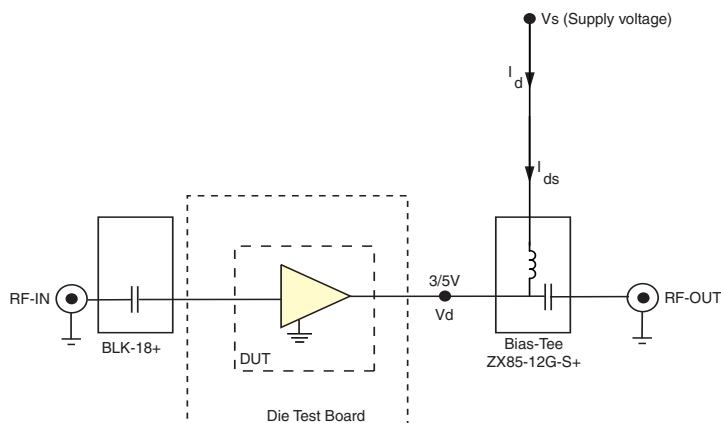


Fig 1. Block Diagram of Test Circuit used for characterization. Gain, Return loss, Output power at 1dB compression (P1 dB), Output IP3 (OIP3) and Noise Figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain: $P_{in} = -25\text{dBm}$
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, +5 dBm/tone at output.

Recommended Application Circuit

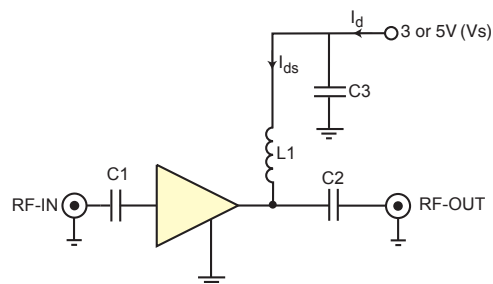


Fig 2. Recommended Application Circuit

$C1 = 1000\text{pF}$
 $C2 \text{ \& } L1 = \text{TCBT-14+}$
 $C3 = 0.1\mu\text{F}$

Die Layout

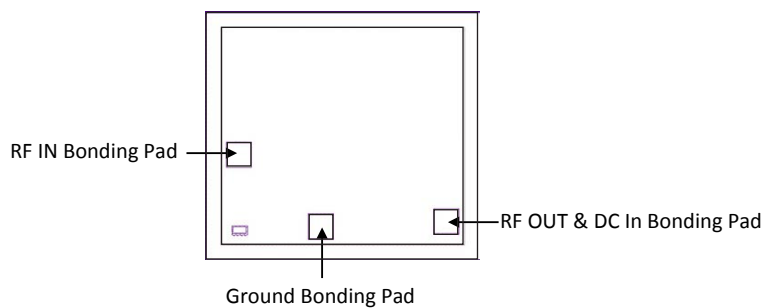


Fig 3. Die Layout

Critical Dimensions

Parameter	Values
Die Thickness, μm	100
Die Width, μm	800
Die Length, μm	725
Bond Pad Size, μm	75 x 75



Bonding Pad Position
(Dimensions in μm , Typical)

Fig 4. Bonding Pad Positions

Assembly and Handling Procedure

- Storage**
Dice should be stored in a dry nitrogen purged desiccators or equivalent.
- ESD**
MMIC EPHEMPT amplifier dice are susceptible to electrostatic and mechanical damage. Die are supplied in antistatic protected material, which should be opened in clean room conditions at an appropriately grounded anti-static workstation. Devices need careful handling using correctly designed collets, vacuum pickup tips or sharp antistatic tweezers to deter ESD damage to dice.
- Die Attach**
The die mounting surface must be clean and flat. Using conductive silver filled epoxy, recommended epoxies are DieMat DM6030HK-PT/H579 or Ablestik 84-1LMISR4. Apply sufficient epoxy to meet required epoxy bond line thickness, epoxy fillet height and epoxy coverage around total die periphery. Parts shall be cured in a nitrogen filled atmosphere per manufacturer's cure condition. It is recommended to use antistatic die pick up tools only.
- Wire Bonding**
Bond pad openings in the surface passivation above the bond pads are provided to allow wire bonding to the dice gold bond pads. Thermosonic bonding is used with minimized ultrasonic content. Bond force, time, ultrasonic power and temperature are all critical parameters. Suggested wire is pure gold, 1 mil diameter. Bonds must be made from the bond pads on the die to the package or substrate. All bond wires should be kept as short as low as reasonable to minimize performance degradation due to undesirable series inductance.


Assembly Diagram

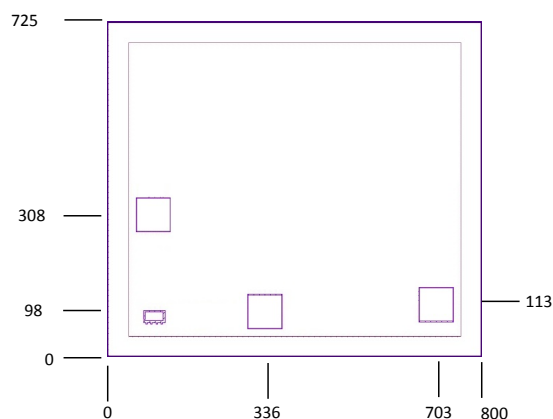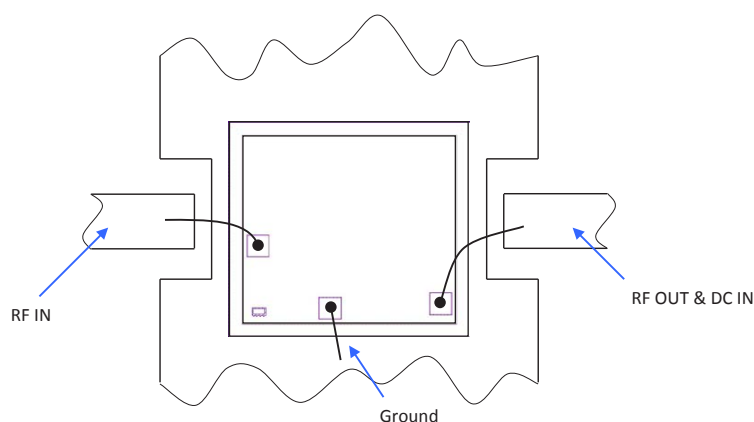

Recommended Wire Length, Typical

Wire	Wire Length (mm)	Wire Loop Height (mm)
RF-IN, RF-OUT & DC-IN	0.50	0.15
GND	0.60	0.15

RF Reference Plane - No port extension

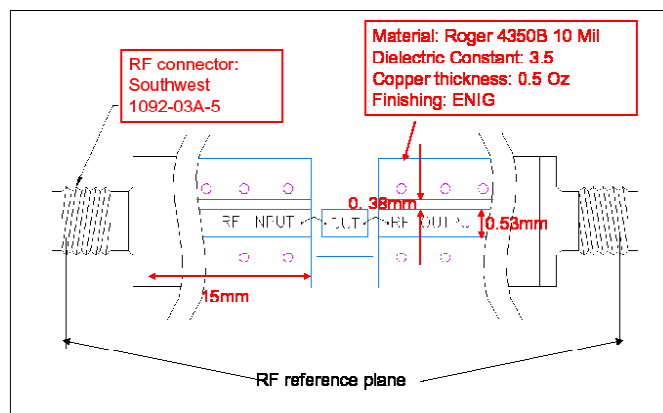

Additional Detailed Technical Information	
<i>additional information is available on our dash board.</i>	
Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set with and without port extension(.zip file)
Case Style	Die
Die Ordering and packaging information	Quantity, Package Model No.
	Small, Gel - Pak: 10,50,100 KGD* PSA4-5043-DG+
	Medium†, Partial wafer: KGD*<2020 PSA4-5043-DP+
	Large†, Full Wafer PSA4-5043-DF+
	†Available upon request contact sales representative
	Refer to AN-60-067
Environmental Ratings	ENV-80

*Known Good Dice ("KGD") means that the dice in question have been subjected to Mini-Circuits DC test performance criteria and measurement instructions and that the parametric data of such dice fall within a predefined range. While DC testing is not definitive, it does help to provide a higher degree of confidence that dice are capable of meeting typical RF electrical parameters specified by Mini-Circuits.

ESD Rating**

Human Body Model (HBM): Class 1B (500 to <1000V) in accordance with ANSI/ESD STM 5.1 - 2001

** Measured in industry standard SOT-343 package.

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp
- Mini-Circuits does not warrant the accuracy or completeness of the information, text, graphics and other items contained within this document and same are provided as an accommodation and on an "As is" basis, with all faults.
- Purchasers of this part are solely responsible for proper storing, handling, assembly and processing of Known Good Dice (including, without limitation, proper ESD preventative measures, die preparation, die attach, wire bonding and related assembly and test activities), and Mini-Circuits assumes no responsibility therefor or for environmental effects on Known Good Dice.
- Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation by any such third-party of Mini-Circuits or its products.



MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3.00V, Id = 31mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	24.10	28.38	6.56	11.64	0.94	0.72	27.61	14.86	0.57
60	23.83	27.96	7.69	13.45	0.97	0.71	27.60	14.82	0.61
70	23.71	27.71	8.02	14.17	0.98	0.69	27.63	14.85	0.63
80	23.63	27.65	8.27	14.73	0.99	0.68	27.64	15.15	0.64
90	23.55	27.64	8.51	15.25	1.00	0.69	27.66	15.12	0.66
100	23.49	27.68	8.60	15.50	1.01	0.69	27.71	15.18	0.68
150	23.31	27.46	8.90	16.19	1.02	0.69	27.74	15.24	0.69
200	23.02	27.33	9.07	16.57	1.03	0.70	27.78	15.25	0.70
250	22.75	27.23	9.22	16.81	1.04	0.72	27.80	15.27	0.71
300	22.47	26.98	9.22	16.71	1.04	0.72	27.84	15.33	0.72
350	22.16	26.76	9.34	16.90	1.04	0.73	27.90	15.32	0.73
400	21.82	26.60	9.34	16.85	1.05	0.75	27.92	15.37	0.74
450	21.48	26.33	9.42	16.80	1.05	0.76	27.97	15.45	0.75
500	21.13	26.10	9.48	16.89	1.05	0.77	28.02	15.53	0.75
550	20.77	25.90	9.54	16.86	1.06	0.79	28.06	15.67	0.76
650	20.06	25.37	9.63	16.87	1.07	0.80	28.15	15.84	0.78
700	19.72	25.10	9.73	16.84	1.07	0.81	28.19	15.94	0.79
750	19.36	24.86	9.82	16.84	1.08	0.82	28.24	16.05	0.79
800	19.02	24.56	9.90	16.80	1.08	0.82	28.29	16.13	0.80
850	18.69	24.35	9.97	16.78	1.09	0.83	28.34	16.14	0.80
900	18.35	24.06	10.03	16.78	1.09	0.83	28.37	16.27	0.81
950	18.04	23.82	10.12	16.74	1.09	0.83	28.43	16.36	0.82
1000	17.72	23.56	10.21	16.70	1.10	0.84	28.48	16.41	0.83
1200	16.55	22.63	10.53	16.58	1.12	0.85	28.71	16.80	0.88
1400	15.48	21.74	10.77	16.64	1.13	0.85	28.88	17.14	0.94
1600	14.55	20.92	10.96	16.78	1.15	0.86	29.10	17.47	0.97
1800	13.68	20.10	11.06	17.17	1.15	0.86	29.29	17.86	1.00
2000	12.91	19.36	11.03	17.55	1.16	0.86	29.52	18.08	1.01
2200	12.18	18.69	10.89	18.16	1.16	0.87	29.59	18.20	1.02
2400	11.53	18.05	10.71	18.92	1.16	0.88	29.64	18.34	1.07
2600	10.91	17.42	10.47	19.51	1.16	0.88	29.66	18.53	1.15
2800	10.33	16.87	10.30	19.90	1.16	0.89	29.55	18.56	1.24
3000	9.81	16.35	10.19	20.03	1.16	0.89	29.45	18.52	1.27
3200	9.30	15.81	10.10	19.87	1.15	0.89	29.30	18.51	1.30
3400	8.84	15.34	10.15	19.28	1.15	0.89	29.15	18.56	1.36
3600	8.40	14.89	10.23	18.54	1.15	0.89	28.98	18.70	1.42
3800	7.99	14.45	10.40	17.84	1.15	0.88	28.69	18.76	1.49
4000	7.60	14.03	10.59	17.18	1.14	0.87	28.52	18.82	1.55

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 2.70V, Id = 27mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	23.78	27.42	6.23	11.44	0.89	0.69	26.27	14.22	0.58
60	23.50	27.76	7.41	13.06	0.97	0.72	26.29	14.30	0.62
70	23.39	27.60	7.70	13.63	0.98	0.71	26.36	14.33	0.64
80	23.31	27.57	7.94	14.13	0.99	0.71	26.40	14.45	0.65
90	23.23	27.56	8.16	14.58	1.01	0.71	26.41	14.54	0.68
100	23.17	27.48	8.24	14.82	1.01	0.70	26.46	14.61	0.69
150	22.99	27.24	8.52	15.72	1.02	0.70	26.49	14.62	0.70
200	22.72	27.09	8.70	15.91	1.02	0.71	26.52	14.58	0.71
250	22.45	26.87	8.82	16.16	1.03	0.72	26.53	14.66	0.72
300	22.18	26.80	8.82	16.24	1.03	0.74	26.57	14.67	0.73
350	21.87	26.45	8.95	16.26	1.03	0.74	26.62	14.67	0.74
400	21.54	26.30	8.95	16.34	1.03	0.76	26.63	14.72	0.75
450	21.20	25.97	9.03	16.35	1.03	0.77	26.68	14.86	0.76
500	20.86	25.73	9.09	16.49	1.03	0.78	26.72	14.89	0.76
550	20.50	25.48	9.16	16.60	1.03	0.79	26.75	14.97	0.77
650	19.79	24.99	9.25	16.74	1.04	0.81	26.84	15.21	0.78
700	19.45	24.70	9.35	16.77	1.05	0.81	26.88	15.31	0.79
750	19.10	24.48	9.43	16.81	1.05	0.82	26.93	15.37	0.80
800	18.76	24.20	9.51	16.81	1.06	0.83	26.97	15.45	0.81
850	18.44	23.96	9.58	16.88	1.06	0.83	27.01	15.40	0.81
900	18.10	23.72	9.64	16.97	1.07	0.84	27.03	15.54	0.81
950	17.79	23.49	9.73	16.95	1.07	0.84	27.08	15.63	0.82
1000	17.47	23.18	9.81	16.98	1.08	0.84	27.12	15.74	0.83
1200	16.32	22.29	10.13	17.05	1.10	0.85	27.34	16.20	0.89
1400	15.26	21.40	10.37	17.32	1.12	0.86	27.53	16.44	0.96
1600	14.32	20.60	10.55	17.60	1.13	0.87	27.77	16.82	1.00
1800	13.47	19.80	10.63	18.14	1.14	0.87	27.99	17.23	1.01
2000	12.69	19.08	10.60	18.66	1.15	0.87	28.25	17.40	1.02
2200	11.97	18.38	10.49	19.44	1.15	0.88	28.35	17.50	1.04
2400	11.33	17.79	10.29	20.36	1.15	0.88	28.44	17.60	1.09
2600	10.71	17.16	10.08	21.01	1.15	0.89	28.48	17.80	1.17
2800	10.14	16.63	9.91	21.45	1.15	0.90	28.37	17.77	1.26
3000	9.61	16.09	9.80	21.44	1.15	0.90	28.27	17.88	1.29
3200	9.10	15.60	9.70	21.15	1.15	0.90	28.15	17.82	1.31
3400	8.64	15.11	9.74	20.40	1.14	0.89	28.01	17.77	1.37
3600	8.21	14.65	9.81	19.50	1.14	0.89	27.83	17.97	1.43
3800	7.80	14.21	9.97	18.79	1.14	0.88	27.53	18.04	1.50
4000	7.42	13.81	10.16	18.07	1.14	0.88	27.38	18.09	1.57

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3.30V, Id = 34mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	24.39	28.34	6.75	11.29	0.91	0.70	28.35	15.67	0.57
60	24.10	27.93	7.94	13.85	0.96	0.68	28.44	15.69	0.61
70	23.99	27.93	8.28	14.61	0.98	0.68	28.56	15.65	0.63
80	23.91	27.94	8.55	15.22	1.00	0.68	28.67	15.96	0.64
90	23.82	27.90	8.80	15.75	1.01	0.68	28.69	15.93	0.66
100	23.77	27.78	8.89	15.99	1.01	0.67	28.75	15.93	0.67
150	23.57	27.61	9.19	17.02	1.02	0.68	28.79	15.99	0.68
200	23.30	27.48	9.39	17.15	1.03	0.68	28.84	16.01	0.69
250	23.01	27.36	9.53	17.47	1.04	0.70	28.87	16.08	0.70
300	22.75	27.19	9.53	17.29	1.04	0.71	28.91	16.15	0.72
350	22.41	27.04	9.66	17.20	1.05	0.72	28.96	16.20	0.72
400	22.08	26.86	9.66	17.15	1.06	0.74	29.00	16.18	0.73
450	21.72	26.69	9.73	16.90	1.07	0.76	29.05	16.26	0.74
500	21.37	26.42	9.80	16.97	1.07	0.76	29.11	16.34	0.75
550	21.02	26.19	9.86	16.89	1.07	0.78	29.16	16.42	0.76
650	20.29	25.72	9.95	16.72	1.08	0.80	29.26	16.64	0.77
700	19.93	25.43	10.04	16.65	1.09	0.80	29.32	16.74	0.78
750	19.59	25.17	10.13	16.59	1.09	0.81	29.39	16.78	0.79
800	19.23	24.94	10.21	16.52	1.10	0.82	29.44	16.86	0.80
850	18.90	24.64	10.27	16.44	1.10	0.82	29.51	16.81	0.80
900	18.57	24.42	10.34	16.40	1.11	0.83	29.54	16.94	0.80
950	18.24	24.18	10.44	16.30	1.11	0.83	29.59	17.02	0.81
1000	17.93	23.87	10.54	16.20	1.11	0.83	29.65	17.07	0.82
1200	16.74	22.95	10.86	15.93	1.13	0.84	29.86	17.50	0.88
1400	15.68	22.04	11.13	15.90	1.15	0.85	30.04	17.77	0.94
1600	14.72	21.18	11.31	15.94	1.16	0.85	30.22	18.09	0.98
1800	13.86	20.39	11.42	16.21	1.16	0.86	30.40	18.47	0.99
2000	13.07	19.64	11.39	16.47	1.17	0.86	30.59	18.69	1.01
2200	12.35	18.95	11.25	16.99	1.17	0.87	30.66	18.92	1.03
2400	11.69	18.30	11.04	17.63	1.17	0.87	30.71	19.05	1.07
2600	11.07	17.65	10.83	18.11	1.16	0.88	30.69	19.14	1.15
2800	10.50	17.10	10.66	18.46	1.16	0.88	30.64	19.17	1.24
3000	9.96	16.55	10.53	18.58	1.16	0.89	30.59	19.18	1.27
3200	9.46	16.04	10.42	18.53	1.16	0.89	30.53	19.12	1.30
3400	8.99	15.56	10.48	17.98	1.15	0.89	30.49	19.14	1.36
3600	8.55	15.08	10.59	17.33	1.15	0.88	30.38	19.27	1.41
3800	8.13	14.67	10.76	16.74	1.15	0.87	30.23	19.37	1.46
4000	7.74	14.25	10.98	16.15	1.15	0.87	30.05	19.42	1.52

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.00V, Id = 55mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	25.34	29.36	7.56	12.93	0.96	0.69	32.23	18.15	0.64
60	25.06	28.76	8.75	15.11	0.98	0.66	32.30	18.33	0.66
70	24.95	28.64	9.16	16.04	0.99	0.65	32.41	18.35	0.66
80	24.86	28.64	9.44	16.80	1.01	0.66	32.49	18.49	0.66
90	24.78	28.55	9.72	17.52	1.02	0.65	32.55	18.45	0.68
100	24.73	28.52	9.83	17.88	1.02	0.65	32.64	18.44	0.69
150	24.50	28.49	10.19	18.69	1.04	0.66	32.72	18.49	0.70
200	24.21	28.38	10.37	18.77	1.06	0.67	32.82	18.42	0.70
250	23.91	28.31	10.51	18.63	1.07	0.68	32.88	18.48	0.71
300	23.61	28.10	10.50	18.05	1.07	0.69	32.96	18.53	0.72
350	23.24	27.96	10.66	17.68	1.09	0.70	33.06	18.55	0.72
400	22.88	27.77	10.64	17.22	1.09	0.72	33.12	18.56	0.74
450	22.51	27.58	10.72	16.74	1.10	0.73	33.21	18.62	0.75
500	22.12	27.46	10.77	16.50	1.11	0.75	33.31	18.67	0.75
550	21.74	27.18	10.82	16.22	1.12	0.76	33.39	18.72	0.75
650	20.98	26.75	10.92	15.67	1.13	0.78	33.58	18.85	0.77
700	20.60	26.50	11.01	15.43	1.14	0.79	33.66	18.91	0.78
750	20.24	26.19	11.09	15.23	1.14	0.79	33.74	18.94	0.78
800	19.87	25.94	11.17	15.05	1.15	0.80	33.80	19.00	0.79
850	19.52	25.73	11.25	14.87	1.15	0.81	33.90	18.93	0.79
900	19.17	25.44	11.33	14.72	1.15	0.81	33.95	18.98	0.80
950	18.84	25.16	11.43	14.52	1.16	0.81	34.01	19.00	0.81
1000	18.51	24.96	11.53	14.39	1.16	0.82	34.06	19.03	0.82
1200	17.28	23.95	11.89	13.89	1.17	0.83	34.24	19.23	0.88
1400	16.18	23.03	12.17	13.62	1.19	0.83	34.38	19.36	0.94
1600	15.20	22.09	12.36	13.49	1.19	0.84	34.43	19.62	0.99
1800	14.32	21.28	12.49	13.59	1.19	0.84	34.44	19.77	1.00
2000	13.51	20.51	12.47	13.67	1.19	0.85	34.58	19.93	1.01
2200	12.78	19.76	12.32	13.98	1.19	0.85	34.50	20.06	1.03
2400	12.11	19.08	12.08	14.34	1.19	0.86	34.47	20.23	1.07
2600	11.49	18.46	11.83	14.63	1.19	0.87	34.32	20.25	1.15
2800	10.90	17.86	11.67	14.78	1.18	0.87	34.12	20.29	1.25
3000	10.36	17.29	11.55	14.83	1.18	0.88	33.90	20.33	1.29
3200	9.85	16.78	11.46	14.81	1.17	0.88	33.69	20.18	1.33
3400	9.36	16.28	11.55	14.42	1.17	0.87	33.51	20.26	1.39
3600	8.91	15.82	11.67	13.95	1.17	0.87	33.31	20.33	1.46
3800	8.48	15.40	11.91	13.50	1.17	0.86	33.07	20.28	1.52
4000	8.07	14.96	12.18	13.03	1.16	0.85	32.75	20.28	1.57

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 52mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	25.21	29.20	7.48	12.67	0.95	0.69	32.42	18.04	0.62
60	24.96	28.63	8.66	14.88	0.97	0.66	32.42	18.05	0.64
70	24.84	28.60	9.06	15.83	0.99	0.66	32.43	18.01	0.65
80	24.75	28.50	9.35	16.59	1.00	0.65	32.42	18.25	0.65
90	24.67	28.44	9.63	17.28	1.01	0.65	32.47	18.21	0.67
100	24.62	28.42	9.73	17.64	1.02	0.65	32.54	18.26	0.68
150	24.39	28.36	10.08	18.49	1.04	0.66	32.58	18.31	0.69
200	24.11	28.23	10.26	18.60	1.05	0.66	32.64	18.30	0.69
250	23.81	28.09	10.40	18.50	1.06	0.67	32.68	18.36	0.70
300	23.51	27.93	10.41	17.98	1.07	0.69	32.73	18.42	0.71
350	23.15	27.91	10.56	17.63	1.09	0.71	32.80	18.44	0.72
400	22.80	27.64	10.53	17.17	1.09	0.72	32.84	18.47	0.73
450	22.42	27.53	10.61	16.74	1.10	0.73	32.92	18.53	0.74
500	22.05	27.30	10.66	16.55	1.11	0.75	32.97	18.58	0.75
550	21.66	27.08	10.73	16.27	1.11	0.76	33.01	18.64	0.75
650	20.91	26.60	10.82	15.72	1.13	0.78	33.10	18.77	0.77
700	20.54	26.37	10.92	15.50	1.13	0.79	33.17	18.85	0.77
750	20.17	26.08	10.99	15.33	1.13	0.79	33.23	18.88	0.78
800	19.80	25.87	11.07	15.15	1.14	0.80	33.27	18.94	0.78
850	19.46	25.61	11.15	14.96	1.15	0.81	33.33	18.87	0.79
900	19.11	25.39	11.21	14.83	1.15	0.81	33.34	18.93	0.79
950	18.78	25.10	11.33	14.67	1.16	0.82	33.40	19.00	0.80
1000	18.45	24.88	11.43	14.50	1.16	0.82	33.44	19.03	0.81
1200	17.23	23.87	11.78	14.02	1.17	0.83	33.59	19.23	0.87
1400	16.13	22.89	12.05	13.79	1.18	0.83	33.69	19.38	0.94
1600	15.16	22.02	12.26	13.64	1.18	0.84	33.76	19.66	0.98
1800	14.28	21.20	12.37	13.75	1.19	0.84	33.75	19.87	0.99
2000	13.48	20.42	12.35	13.86	1.19	0.85	33.86	19.99	1.00
2200	12.74	19.70	12.21	14.15	1.19	0.86	33.75	20.18	1.03
2400	12.08	19.06	11.97	14.52	1.19	0.86	33.65	20.35	1.07
2600	11.45	18.40	11.75	14.84	1.18	0.87	33.56	20.43	1.16
2800	10.87	17.80	11.58	15.03	1.18	0.87	33.40	20.48	1.25
3000	10.33	17.26	11.45	15.07	1.18	0.88	33.22	20.58	1.29
3200	9.82	16.72	11.36	15.01	1.17	0.88	33.04	20.43	1.32
3400	9.34	16.23	11.44	14.66	1.17	0.87	32.83	20.47	1.37
3600	8.89	15.76	11.57	14.18	1.16	0.87	32.65	20.50	1.43
3800	8.46	15.34	11.80	13.72	1.16	0.86	32.32	20.50	1.49
4000	8.05	14.91	12.05	13.26	1.16	0.85	31.99	20.56	1.56

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 58mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	25.42	28.46	7.49	13.51	0.92	0.62	32.67	18.24	0.65
60	25.13	28.96	8.80	15.26	0.98	0.68	32.71	18.26	0.66
70	25.01	28.73	9.19	16.10	0.99	0.66	32.76	18.29	0.66
80	24.93	28.65	9.49	16.92	1.01	0.65	32.79	18.53	0.66
90	24.84	28.60	9.77	17.56	1.02	0.65	32.86	18.49	0.68
100	24.79	28.55	9.88	17.99	1.02	0.64	32.95	18.48	0.69
150	24.56	28.57	10.24	19.01	1.04	0.66	33.01	18.52	0.70
200	24.27	28.37	10.41	18.99	1.05	0.66	33.09	18.46	0.70
250	23.97	28.33	10.55	18.64	1.07	0.68	33.15	18.51	0.71
300	23.66	28.11	10.55	18.18	1.07	0.68	33.21	18.55	0.72
350	23.29	27.95	10.71	17.70	1.08	0.70	33.28	18.57	0.73
400	22.93	27.89	10.69	17.22	1.10	0.72	33.35	18.58	0.74
450	22.56	27.60	10.76	16.77	1.10	0.73	33.41	18.64	0.75
500	22.17	27.52	10.82	16.51	1.12	0.75	33.47	18.68	0.75
550	21.79	27.26	10.86	16.21	1.12	0.76	33.53	18.73	0.76
650	21.02	26.79	10.97	15.64	1.13	0.78	33.66	18.85	0.77
700	20.64	26.59	11.05	15.39	1.14	0.79	33.71	18.92	0.77
750	20.27	26.27	11.14	15.18	1.14	0.79	33.80	18.94	0.78
800	19.91	26.02	11.22	14.99	1.15	0.80	33.87	18.99	0.78
850	19.55	25.74	11.28	14.81	1.15	0.80	33.91	18.93	0.78
900	19.21	25.50	11.38	14.67	1.16	0.81	33.95	18.97	0.79
950	18.87	25.24	11.49	14.47	1.16	0.81	34.01	18.99	0.80
1000	18.54	24.97	11.58	14.32	1.16	0.82	34.05	19.02	0.81
1200	17.31	23.98	11.94	13.82	1.18	0.83	34.23	19.22	0.87
1400	16.20	23.06	12.22	13.57	1.19	0.83	34.37	19.30	0.94
1600	15.22	22.15	12.42	13.43	1.19	0.84	34.46	19.54	0.99
1800	14.34	21.30	12.55	13.49	1.19	0.84	34.48	19.69	1.00
2000	13.53	20.51	12.51	13.57	1.19	0.85	34.56	19.80	1.00
2200	12.80	19.80	12.39	13.88	1.19	0.85	34.49	19.92	1.02
2400	12.13	19.12	12.13	14.24	1.19	0.86	34.42	20.03	1.08
2600	11.50	18.48	11.90	14.52	1.19	0.87	34.29	20.04	1.16
2800	10.92	17.89	11.72	14.64	1.18	0.87	34.14	20.13	1.24
3000	10.38	17.35	11.61	14.71	1.18	0.88	33.95	20.12	1.28
3200	9.86	16.81	11.52	14.65	1.17	0.88	33.70	19.96	1.32
3400	9.38	16.33	11.60	14.29	1.17	0.87	33.52	19.92	1.39
3600	8.93	15.85	11.72	13.83	1.17	0.87	33.26	20.05	1.46
3800	8.49	15.41	11.97	13.36	1.16	0.86	32.97	20.00	1.53
4000	8.08	15.01	12.25	12.90	1.16	0.85	32.61	19.99	1.58

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Without Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3.00V, Id = 31mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	24.14	27.92	6.51	12.11	0.92	0.69	27.61	14.86	0.57
60	23.89	28.01	7.61	13.40	0.96	0.71	27.60	14.82	0.61
70	23.78	27.79	7.96	14.08	0.98	0.69	27.63	14.85	0.63
80	23.69	27.69	8.21	14.68	0.99	0.68	27.64	15.15	0.64
90	23.61	27.66	8.45	15.14	1.00	0.68	27.66	15.12	0.66
100	23.55	27.54	8.54	15.48	1.00	0.68	27.71	15.18	0.68
150	23.35	27.52	8.86	16.20	1.02	0.69	27.74	15.24	0.69
200	23.08	27.29	9.02	16.59	1.03	0.69	27.78	15.25	0.70
250	22.80	27.18	9.13	16.76	1.03	0.71	27.80	15.27	0.71
300	22.53	26.95	9.15	16.72	1.03	0.72	27.84	15.33	0.72
350	22.20	26.71	9.28	16.91	1.04	0.73	27.90	15.32	0.73
400	21.85	26.61	9.27	16.87	1.04	0.75	27.92	15.37	0.74
450	21.52	26.34	9.36	16.80	1.05	0.76	27.97	15.45	0.75
500	21.16	26.12	9.42	16.90	1.05	0.77	28.02	15.53	0.75
550	20.80	25.85	9.48	16.88	1.05	0.78	28.06	15.67	0.76
650	20.07	25.35	9.58	16.90	1.06	0.80	28.15	15.84	0.78
700	19.73	25.08	9.67	16.88	1.07	0.81	28.19	15.94	0.79
750	19.37	24.82	9.76	16.87	1.07	0.81	28.24	16.05	0.79
800	19.02	24.57	9.85	16.83	1.08	0.82	28.29	16.13	0.80
850	18.69	24.31	9.91	16.83	1.08	0.83	28.34	16.14	0.80
900	18.35	24.08	9.97	16.83	1.09	0.83	28.37	16.27	0.81
950	18.03	23.80	10.08	16.80	1.09	0.83	28.43	16.36	0.82
1000	17.71	23.60	10.17	16.76	1.10	0.84	28.48	16.41	0.83
1200	16.53	22.65	10.49	16.64	1.12	0.85	28.71	16.80	0.88
1400	15.45	21.81	10.74	16.74	1.14	0.86	28.88	17.14	0.94
1600	14.49	20.96	10.92	16.92	1.15	0.86	29.10	17.47	0.97
1800	13.62	20.17	11.03	17.34	1.16	0.87	29.29	17.86	1.00
2000	12.83	19.44	11.00	17.70	1.17	0.87	29.52	18.08	1.01
2200	12.10	18.78	10.89	18.34	1.18	0.88	29.59	18.20	1.02
2400	11.43	18.14	10.72	19.13	1.18	0.89	29.64	18.34	1.07
2600	10.80	17.52	10.48	19.75	1.18	0.89	29.66	18.53	1.15
2800	10.22	17.00	10.32	20.12	1.18	0.90	29.55	18.56	1.24
3000	9.68	16.46	10.22	20.29	1.18	0.90	29.45	18.52	1.27
3200	9.16	15.95	10.13	20.15	1.18	0.90	29.30	18.51	1.30
3400	8.68	15.51	10.18	19.58	1.18	0.90	29.15	18.56	1.36
3600	8.23	15.05	10.26	18.81	1.18	0.90	28.98	18.70	1.42
3800	7.81	14.62	10.45	18.16	1.18	0.89	28.69	18.76	1.49
4000	7.41	14.21	10.66	17.51	1.18	0.89	28.52	18.82	1.55

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Without Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 2.70V, Id = 27mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	23.78	27.42	6.23	11.44	0.89	0.69	26.27	14.22	0.58
60	23.50	27.76	7.41	13.06	0.97	0.72	26.29	14.30	0.62
70	23.39	27.60	7.70	13.63	0.98	0.71	26.36	14.33	0.64
80	23.31	27.57	7.94	14.13	0.99	0.71	26.40	14.45	0.65
90	23.23	27.56	8.16	14.58	1.01	0.71	26.41	14.54	0.68
100	23.17	27.48	8.24	14.82	1.01	0.70	26.46	14.61	0.69
150	22.99	27.24	8.52	15.72	1.02	0.70	26.49	14.62	0.70
200	22.72	27.09	8.70	15.91	1.02	0.71	26.52	14.58	0.71
250	22.45	26.87	8.82	16.16	1.03	0.72	26.53	14.66	0.72
300	22.18	26.80	8.82	16.24	1.03	0.74	26.57	14.67	0.73
350	21.87	26.45	8.95	16.26	1.03	0.74	26.62	14.67	0.74
400	21.54	26.30	8.95	16.34	1.03	0.76	26.63	14.72	0.75
450	21.20	25.97	9.03	16.35	1.03	0.77	26.68	14.86	0.76
500	20.86	25.73	9.09	16.49	1.03	0.78	26.72	14.89	0.76
550	20.50	25.48	9.16	16.60	1.03	0.79	26.75	14.97	0.77
650	19.79	24.99	9.25	16.74	1.04	0.81	26.84	15.21	0.78
700	19.45	24.70	9.35	16.77	1.05	0.81	26.88	15.31	0.79
750	19.10	24.48	9.43	16.81	1.05	0.82	26.93	15.37	0.80
800	18.76	24.20	9.51	16.81	1.06	0.83	26.97	15.45	0.81
850	18.44	23.96	9.58	16.88	1.06	0.83	27.01	15.40	0.81
900	18.10	23.72	9.64	16.97	1.07	0.84	27.03	15.54	0.81
950	17.79	23.49	9.73	16.95	1.07	0.84	27.08	15.63	0.82
1000	17.47	23.18	9.81	16.98	1.08	0.84	27.12	15.74	0.83
1200	16.32	22.29	10.13	17.05	1.10	0.85	27.34	16.20	0.89
1400	15.26	21.40	10.37	17.32	1.12	0.86	27.53	16.44	0.96
1600	14.32	20.60	10.55	17.60	1.13	0.87	27.77	16.82	1.00
1800	13.47	19.80	10.63	18.14	1.14	0.87	27.99	17.23	1.01
2000	12.69	19.08	10.60	18.66	1.15	0.87	28.25	17.40	1.02
2200	11.97	18.38	10.49	19.44	1.15	0.88	28.35	17.50	1.04
2400	11.33	17.79	10.29	20.36	1.15	0.88	28.44	17.60	1.09
2600	10.71	17.16	10.08	21.01	1.15	0.89	28.48	17.80	1.17
2800	10.14	16.63	9.91	21.45	1.15	0.90	28.37	17.77	1.26
3000	9.61	16.09	9.80	21.44	1.15	0.90	28.27	17.88	1.29
3200	9.10	15.60	9.70	21.15	1.15	0.90	28.15	17.82	1.31
3400	8.64	15.11	9.74	20.40	1.14	0.89	28.01	17.77	1.37
3600	8.21	14.65	9.81	19.50	1.14	0.89	27.83	17.97	1.43
3800	7.80	14.21	9.97	18.79	1.14	0.88	27.53	18.04	1.50
4000	7.42	13.81	10.16	18.07	1.14	0.88	27.38	18.09	1.57

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Without Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3.30V, Id = 34mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	24.46	27.83	6.64	11.61	0.89	0.66	28.35	15.67	0.57
60	24.16	28.03	7.90	13.85	0.96	0.68	28.44	15.69	0.61
70	24.05	27.89	8.22	14.54	0.98	0.67	28.56	15.65	0.63
80	23.96	27.86	8.49	15.16	0.99	0.67	28.67	15.96	0.64
90	23.88	27.81	8.73	15.69	1.00	0.67	28.69	15.93	0.66
100	23.82	27.75	8.84	15.94	1.01	0.67	28.75	15.93	0.67
150	23.61	27.63	9.15	17.07	1.02	0.67	28.79	15.99	0.68
200	23.34	27.42	9.33	17.17	1.03	0.67	28.84	16.01	0.69
250	23.05	27.36	9.47	17.42	1.04	0.70	28.87	16.08	0.70
300	22.77	27.25	9.46	17.29	1.05	0.71	28.91	16.15	0.72
350	22.43	27.06	9.60	17.18	1.05	0.73	28.96	16.20	0.72
400	22.10	26.86	9.60	17.11	1.06	0.74	29.00	16.18	0.73
450	21.74	26.64	9.68	16.96	1.06	0.75	29.05	16.26	0.74
500	21.39	26.38	9.74	17.01	1.06	0.76	29.11	16.34	0.75
550	21.03	26.13	9.80	16.94	1.07	0.77	29.16	16.42	0.76
650	20.30	25.69	9.89	16.77	1.08	0.80	29.26	16.64	0.77
700	19.93	25.42	9.99	16.70	1.09	0.80	29.32	16.74	0.78
750	19.59	25.13	10.07	16.64	1.09	0.81	29.39	16.78	0.79
800	19.23	24.95	10.16	16.56	1.10	0.82	29.44	16.86	0.80
850	18.89	24.65	10.22	16.50	1.10	0.82	29.51	16.81	0.80
900	18.55	24.41	10.28	16.47	1.11	0.83	29.54	16.94	0.80
950	18.23	24.20	10.39	16.36	1.11	0.83	29.59	17.02	0.81
1000	17.91	23.91	10.50	16.29	1.12	0.83	29.65	17.07	0.82
1200	16.71	22.99	10.82	16.05	1.14	0.85	29.86	17.50	0.88
1400	15.63	22.08	11.08	16.01	1.15	0.85	30.04	17.77	0.94
1600	14.67	21.25	11.28	16.06	1.17	0.86	30.22	18.09	0.98
1800	13.79	20.49	11.41	16.35	1.18	0.86	30.40	18.47	0.99
2000	13.00	19.74	11.37	16.65	1.18	0.87	30.59	18.69	1.01
2200	12.26	19.04	11.25	17.18	1.19	0.88	30.66	18.92	1.03
2400	11.59	18.40	11.05	17.83	1.19	0.88	30.71	19.05	1.07
2600	10.96	17.76	10.83	18.35	1.18	0.89	30.69	19.14	1.15
2800	10.37	17.23	10.66	18.70	1.19	0.90	30.64	19.17	1.24
3000	9.83	16.69	10.55	18.84	1.18	0.90	30.59	19.18	1.27
3200	9.31	16.18	10.47	18.79	1.18	0.90	30.53	19.12	1.30
3400	8.83	15.72	10.54	18.28	1.18	0.90	30.49	19.14	1.36
3600	8.39	15.26	10.64	17.64	1.18	0.89	30.38	19.27	1.41
3800	7.95	14.84	10.82	17.06	1.18	0.89	30.23	19.37	1.46
4000	7.55	14.44	11.05	16.48	1.18	0.88	30.05	19.42	1.52

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Without Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.00V, Id = 55mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	25.39	28.94	7.43	13.33	0.94	0.66	32.23	18.15	0.64
60	25.12	28.72	8.71	15.00	0.97	0.65	32.30	18.33	0.66
70	25.01	28.61	9.09	15.97	0.99	0.64	32.41	18.35	0.66
80	24.92	28.56	9.39	16.75	1.00	0.64	32.49	18.49	0.66
90	24.84	28.54	9.65	17.44	1.01	0.64	32.55	18.45	0.68
100	24.78	28.49	9.77	17.85	1.02	0.64	32.64	18.44	0.69
150	24.55	28.43	10.10	18.62	1.04	0.65	32.72	18.49	0.70
200	24.26	28.29	10.30	18.76	1.05	0.65	32.82	18.42	0.70
250	23.94	28.22	10.44	18.53	1.06	0.67	32.88	18.48	0.71
300	23.64	28.05	10.44	18.01	1.07	0.68	32.96	18.53	0.72
350	23.27	27.92	10.59	17.69	1.08	0.70	33.06	18.55	0.72
400	22.91	27.79	10.58	17.23	1.09	0.72	33.12	18.56	0.74
450	22.53	27.58	10.65	16.76	1.10	0.73	33.21	18.62	0.75
500	22.15	27.44	10.71	16.53	1.11	0.75	33.31	18.67	0.75
550	21.75	27.15	10.76	16.29	1.11	0.76	33.39	18.72	0.75
650	20.99	26.76	10.87	15.70	1.13	0.78	33.58	18.85	0.77
700	20.61	26.48	10.96	15.48	1.14	0.79	33.66	18.91	0.78
750	20.24	26.27	11.04	15.28	1.14	0.80	33.74	18.94	0.78
800	19.87	26.00	11.12	15.10	1.15	0.80	33.80	19.00	0.79
850	19.52	25.72	11.19	14.92	1.15	0.81	33.90	18.93	0.79
900	19.16	25.43	11.28	14.79	1.15	0.81	33.95	18.98	0.80
950	18.83	25.20	11.39	14.61	1.16	0.82	34.01	19.00	0.81
1000	18.49	24.92	11.49	14.44	1.16	0.82	34.06	19.03	0.82
1200	17.26	23.93	11.85	13.98	1.18	0.83	34.24	19.23	0.88
1400	16.14	23.00	12.12	13.76	1.19	0.84	34.38	19.36	0.94
1600	15.15	22.15	12.35	13.63	1.20	0.84	34.43	19.62	0.99
1800	14.25	21.32	12.47	13.73	1.20	0.85	34.44	19.77	1.00
2000	13.44	20.58	12.45	13.83	1.21	0.85	34.58	19.93	1.01
2200	12.69	19.82	12.31	14.16	1.21	0.86	34.50	20.06	1.03
2400	12.01	19.19	12.10	14.54	1.21	0.87	34.47	20.23	1.07
2600	11.38	18.57	11.86	14.85	1.21	0.88	34.32	20.25	1.15
2800	10.78	17.97	11.69	15.01	1.21	0.88	34.12	20.29	1.25
3000	10.23	17.44	11.58	15.08	1.21	0.89	33.90	20.33	1.29
3200	9.70	16.92	11.49	15.06	1.20	0.89	33.69	20.18	1.33
3400	9.21	16.43	11.60	14.68	1.20	0.88	33.51	20.26	1.39
3600	8.74	15.99	11.73	14.24	1.20	0.88	33.31	20.33	1.46
3800	8.30	15.56	11.98	13.80	1.20	0.87	33.07	20.28	1.52
4000	7.87	15.17	12.26	13.35	1.21	0.87	32.75	20.28	1.57

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Without Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 52mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	25.30	28.84	7.33	13.17	0.94	0.66	32.42	18.04	0.62
60	25.01	28.65	8.63	14.85	0.97	0.66	32.42	18.05	0.64
70	24.90	28.51	9.01	15.77	0.99	0.65	32.43	18.01	0.65
80	24.81	28.42	9.29	16.53	1.00	0.64	32.42	18.25	0.65
90	24.72	28.39	9.57	17.19	1.01	0.64	32.47	18.21	0.67
100	24.67	28.32	9.68	17.59	1.01	0.63	32.54	18.26	0.68
150	24.45	28.23	10.01	18.41	1.03	0.64	32.58	18.31	0.69
200	24.15	28.17	10.22	18.58	1.05	0.65	32.64	18.30	0.69
250	23.84	28.15	10.36	18.38	1.06	0.68	32.68	18.36	0.70
300	23.54	28.01	10.35	17.90	1.07	0.69	32.73	18.42	0.71
350	23.18	27.78	10.49	17.64	1.08	0.70	32.80	18.44	0.72
400	22.82	27.71	10.47	17.17	1.09	0.72	32.84	18.47	0.73
450	22.44	27.52	10.55	16.79	1.10	0.73	32.92	18.53	0.74
500	22.07	27.28	10.61	16.55	1.10	0.74	32.97	18.58	0.75
550	21.68	27.09	10.67	16.28	1.11	0.76	33.01	18.64	0.75
650	20.91	26.63	10.77	15.77	1.13	0.78	33.10	18.77	0.77
700	20.54	26.43	10.87	15.57	1.14	0.79	33.17	18.85	0.77
750	20.17	26.12	10.94	15.36	1.14	0.80	33.23	18.88	0.78
800	19.80	25.88	11.02	15.19	1.14	0.80	33.27	18.94	0.78
850	19.46	25.60	11.09	15.03	1.15	0.81	33.33	18.87	0.79
900	19.10	25.39	11.18	14.89	1.15	0.82	33.34	18.93	0.79
950	18.77	25.10	11.29	14.72	1.16	0.82	33.40	19.00	0.80
1000	18.44	24.85	11.39	14.58	1.16	0.82	33.44	19.03	0.81
1200	17.20	23.88	11.76	14.10	1.18	0.83	33.59	19.23	0.87
1400	16.09	22.92	12.02	13.90	1.19	0.84	33.69	19.38	0.94
1600	15.11	22.08	12.24	13.79	1.20	0.84	33.76	19.66	0.98
1800	14.21	21.24	12.35	13.89	1.20	0.85	33.75	19.87	0.99
2000	13.40	20.47	12.34	14.02	1.20	0.85	33.86	19.99	1.00
2200	12.65	19.78	12.19	14.34	1.21	0.86	33.75	20.18	1.03
2400	11.98	19.11	11.98	14.72	1.21	0.87	33.65	20.35	1.07
2600	11.34	18.49	11.75	15.04	1.20	0.88	33.56	20.43	1.16
2800	10.75	17.94	11.60	15.26	1.21	0.89	33.40	20.48	1.25
3000	10.20	17.37	11.47	15.30	1.20	0.89	33.22	20.58	1.29
3200	9.68	16.89	11.39	15.28	1.20	0.89	33.04	20.43	1.32
3400	9.18	16.39	11.48	14.92	1.20	0.89	32.83	20.47	1.37
3600	8.72	15.94	11.62	14.46	1.20	0.88	32.65	20.50	1.43
3800	8.28	15.50	11.85	14.04	1.20	0.88	32.32	20.50	1.49
4000	7.85	15.09	12.12	13.57	1.20	0.87	31.99	20.56	1.56

MMIC Amplifier Die

PSA4-5043-D+

Typical Performance Data

Without Full 2-Port Extension

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)


TEST CONDITIONS: Vd = 5.25V, Id = 58mA @Temperature = +25°C

FREQ.	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	25.48	28.83	7.41	13.55	0.93	0.64	32.67	18.24	0.65
60	25.18	28.84	8.75	15.16	0.97	0.66	32.71	18.26	0.66
70	25.07	28.64	9.13	16.05	0.99	0.64	32.76	18.29	0.66
80	24.98	28.58	9.42	16.84	1.00	0.64	32.79	18.53	0.66
90	24.90	28.56	9.70	17.52	1.01	0.64	32.86	18.49	0.68
100	24.85	28.53	9.82	17.97	1.02	0.64	32.95	18.48	0.69
150	24.62	28.53	10.14	18.77	1.04	0.65	33.01	18.52	0.70
200	24.32	28.34	10.35	18.89	1.05	0.65	33.09	18.46	0.70
250	24.00	28.27	10.49	18.57	1.06	0.67	33.15	18.51	0.71
300	23.69	28.11	10.48	18.03	1.07	0.68	33.21	18.55	0.72
350	23.33	27.99	10.63	17.67	1.08	0.70	33.28	18.57	0.73
400	22.96	27.89	10.61	17.17	1.10	0.72	33.35	18.58	0.74
450	22.58	27.74	10.70	16.78	1.11	0.74	33.41	18.64	0.75
500	22.19	27.52	10.75	16.49	1.11	0.75	33.47	18.68	0.75
550	21.80	27.25	10.81	16.20	1.12	0.76	33.53	18.73	0.76
650	21.03	26.82	10.91	15.63	1.13	0.78	33.66	18.85	0.77
700	20.65	26.53	11.00	15.42	1.14	0.79	33.71	18.92	0.77
750	20.28	26.33	11.08	15.21	1.15	0.80	33.80	18.94	0.78
800	19.90	26.05	11.19	15.02	1.15	0.80	33.87	18.99	0.78
850	19.55	25.80	11.24	14.84	1.16	0.81	33.91	18.93	0.78
900	19.20	25.49	11.32	14.72	1.16	0.81	33.95	18.97	0.79
950	18.86	25.22	11.43	14.55	1.16	0.81	34.01	18.99	0.80
1000	18.53	25.00	11.53	14.39	1.17	0.82	34.05	19.02	0.81
1200	17.28	23.99	11.89	13.91	1.18	0.83	34.23	19.22	0.87
1400	16.17	23.10	12.18	13.66	1.20	0.84	34.37	19.30	0.94
1600	15.17	22.19	12.40	13.55	1.20	0.84	34.46	19.54	0.99
1800	14.28	21.36	12.53	13.65	1.21	0.85	34.48	19.69	1.00
2000	13.46	20.60	12.49	13.78	1.21	0.85	34.56	19.80	1.00
2200	12.71	19.91	12.35	14.06	1.21	0.86	34.49	19.92	1.02
2400	12.03	19.22	12.14	14.41	1.21	0.87	34.42	20.03	1.08
2600	11.39	18.61	11.89	14.72	1.21	0.88	34.29	20.04	1.16
2800	10.80	18.01	11.73	14.92	1.21	0.88	34.14	20.13	1.24
3000	10.25	17.46	11.62	14.94	1.21	0.89	33.95	20.12	1.28
3200	9.72	16.94	11.56	14.89	1.20	0.89	33.70	19.96	1.32
3400	9.22	16.47	11.65	14.53	1.20	0.88	33.52	19.92	1.39
3600	8.76	16.01	11.78	14.11	1.20	0.88	33.26	20.05	1.46
3800	8.31	15.59	12.03	13.63	1.20	0.87	32.97	20.00	1.53
4000	7.89	15.18	12.33	13.19	1.20	0.86	32.61	19.99	1.58


Typical Performance Curves

Full 2-Port Extension


GAIN vs. FREQUENCY & DEVICE VOLTAGE
INPUT POWER = -25dBm, Temperature = +25°C

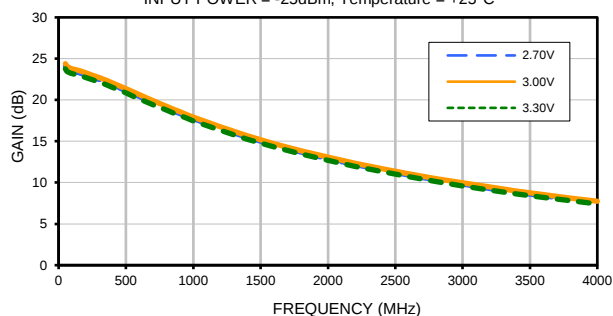


ISOLATION vs. FREQUENCY & DEVICE VOLTAGE
INPUT POWER = -25dBm, Temperature = +25°C

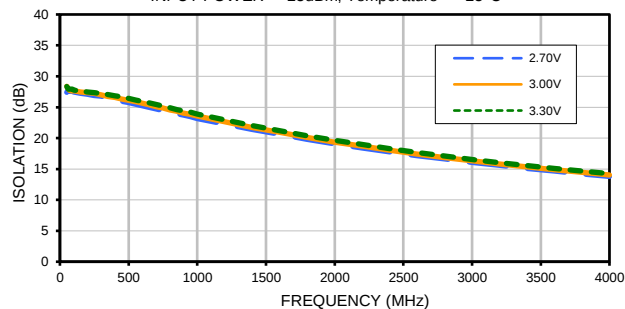


INPUT RETURN LOSS vs. FREQUENCY & DEVICE VOLTAGE
INPUT POWER = -25dBm, Temperature = +25°C

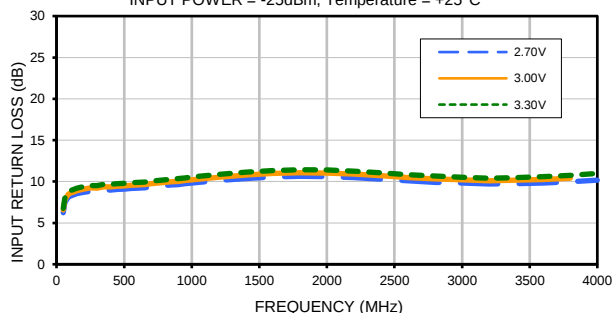


OUTPUT RETURN LOSS vs. FREQUENCY & DEVICE VOLTAGE
INPUT POWER = -25dBm, Temperature = +25°C

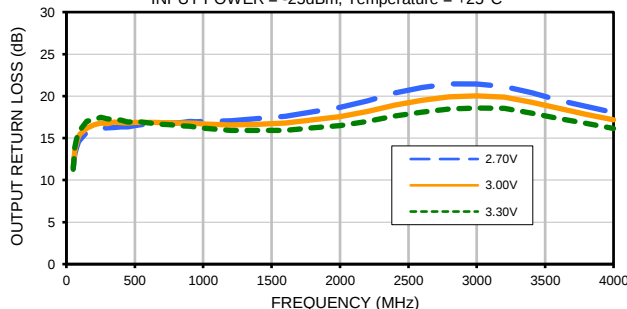


OUTPUT IP3 vs. FREQUENCY & DEVICE VOLTAGE
OUTPUT POWER = 5 dBm/100Hz, Temperature = +25°C

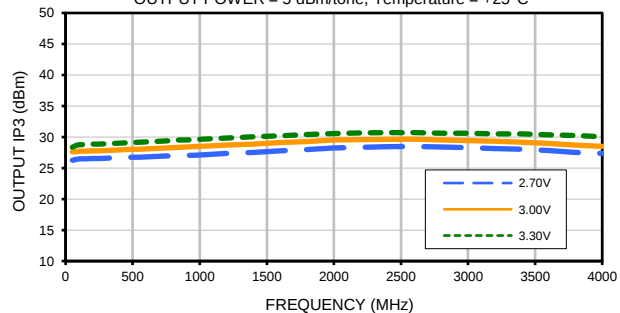

P1dB vs. FREQUENCY & DEVICE VOLTAGE
Temperature = +25°C







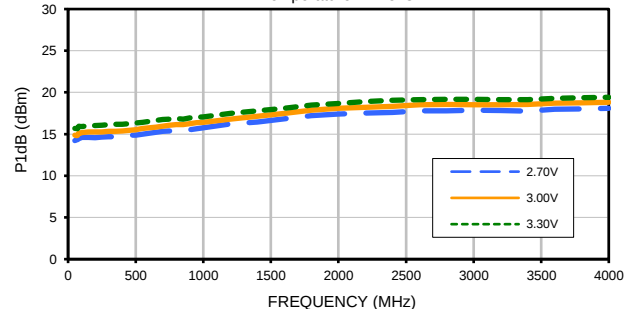


NOISE FIGURE vs. FREQUENCY & DEVICE VOLTAGE
Temperature = +25°C

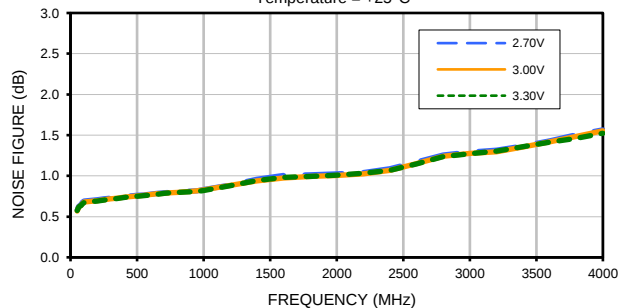








Typical Performance Curves

Full 2-Port Extension

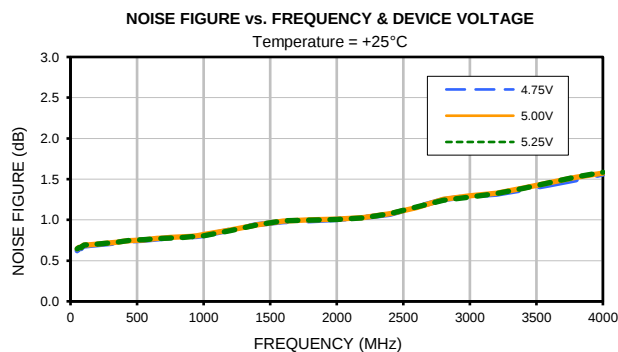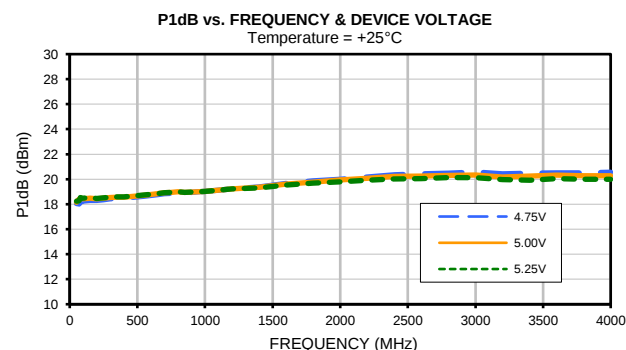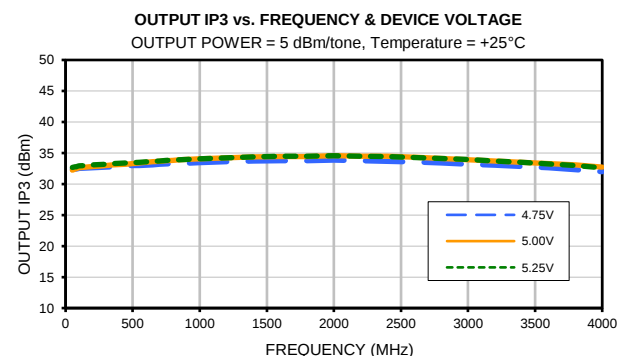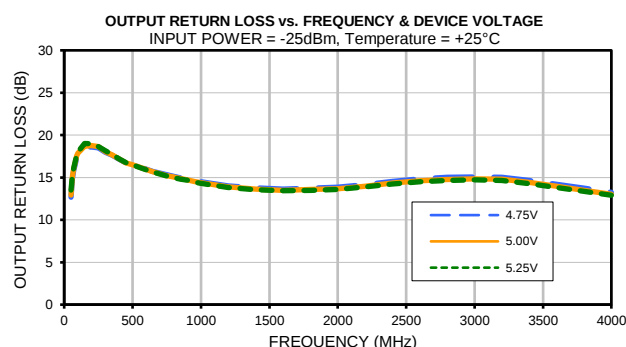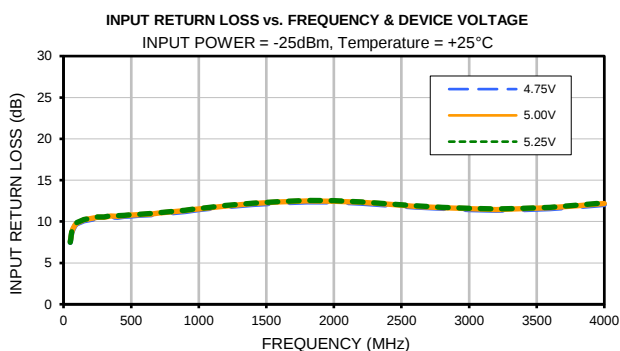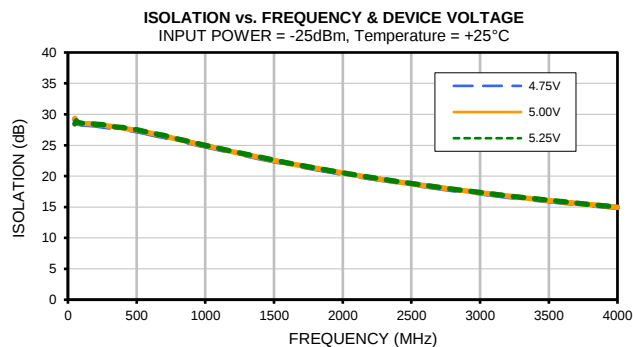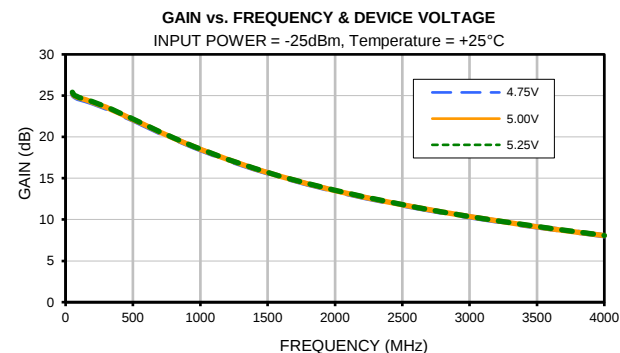








Typical Performance Curves

Without Full 2-Port Extension

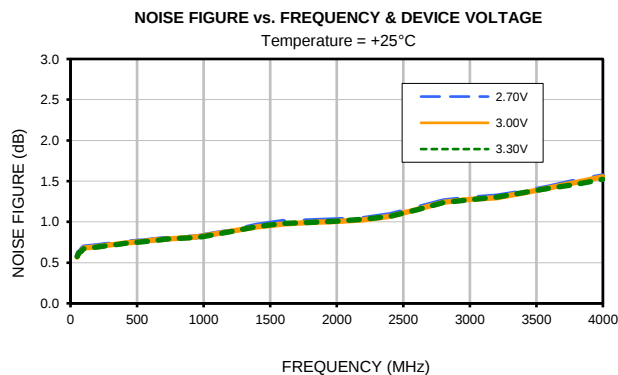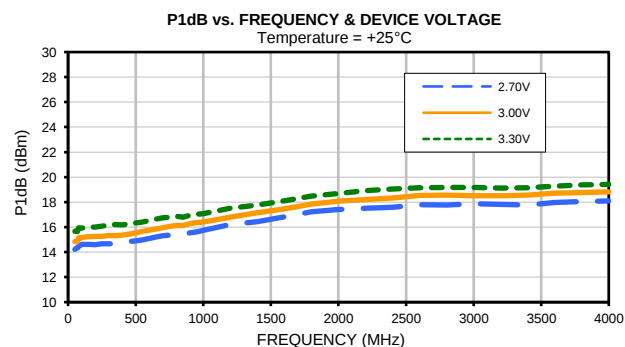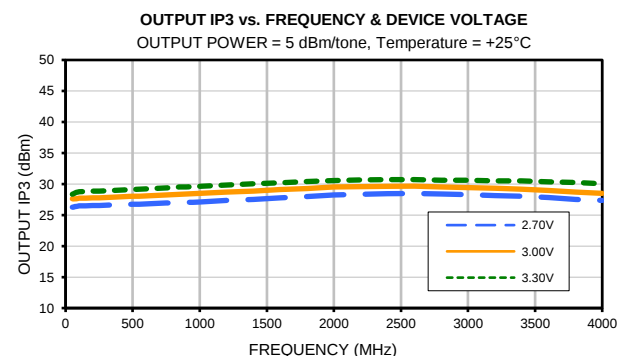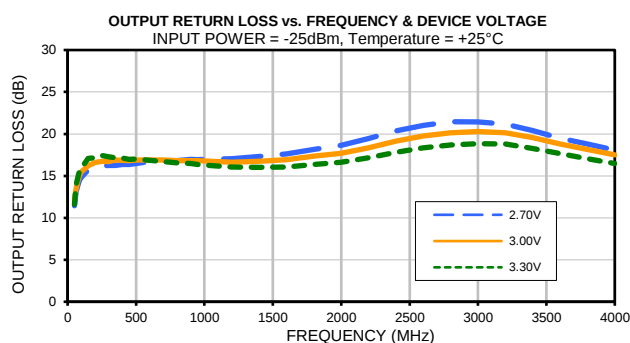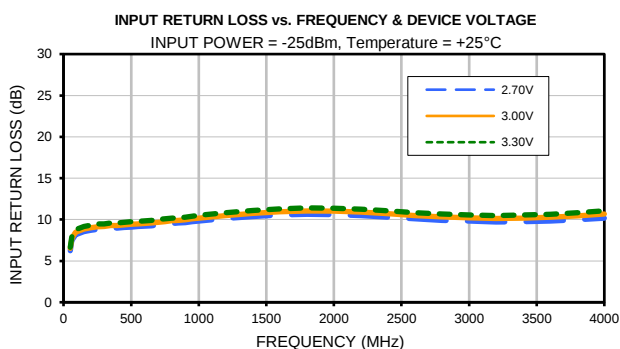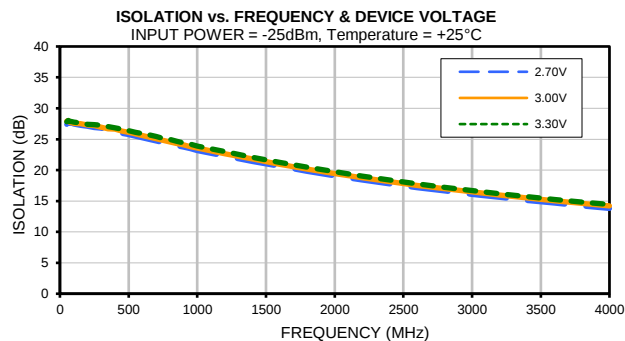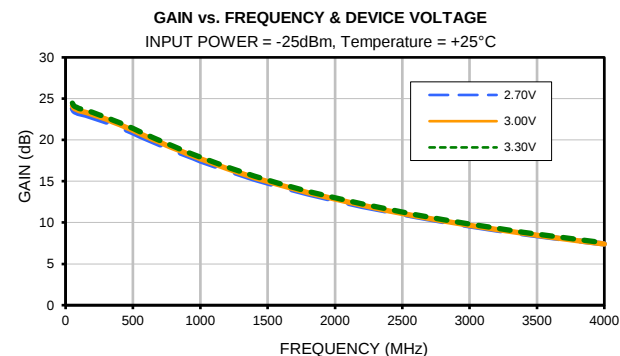

Typical Performance Curves

Without Full 2-Port Extension

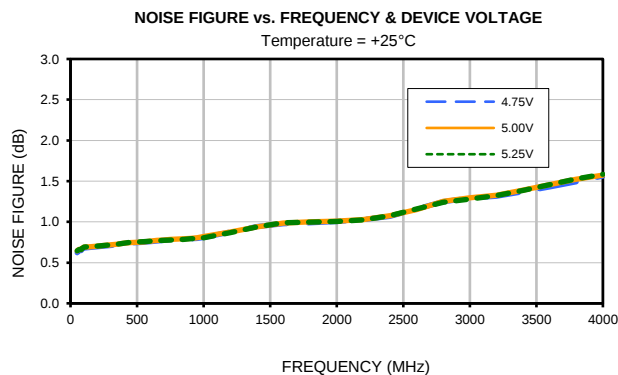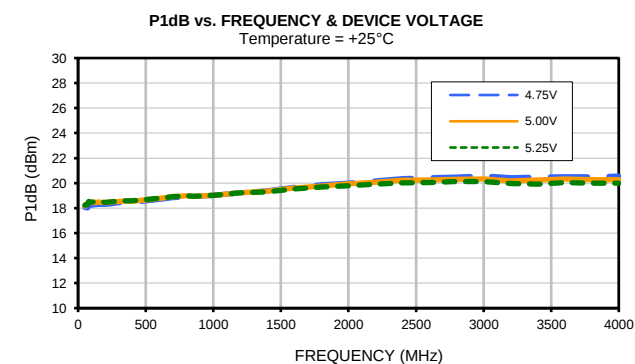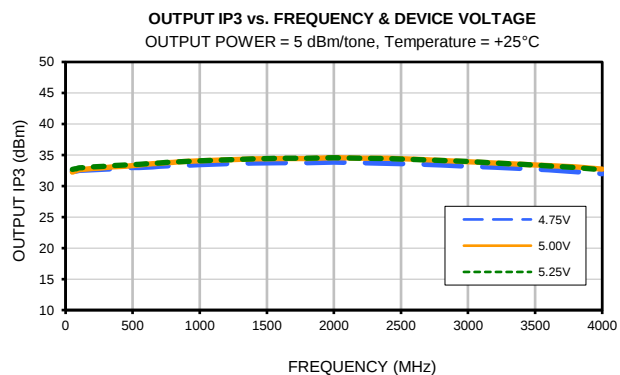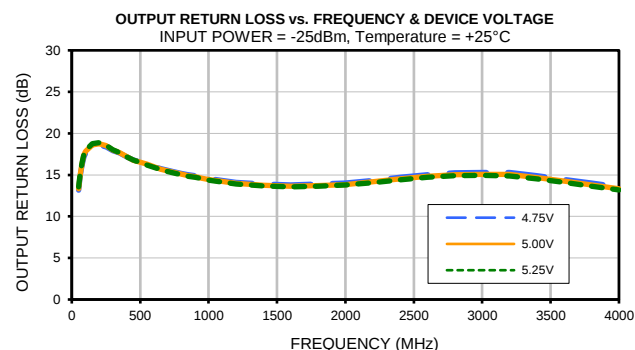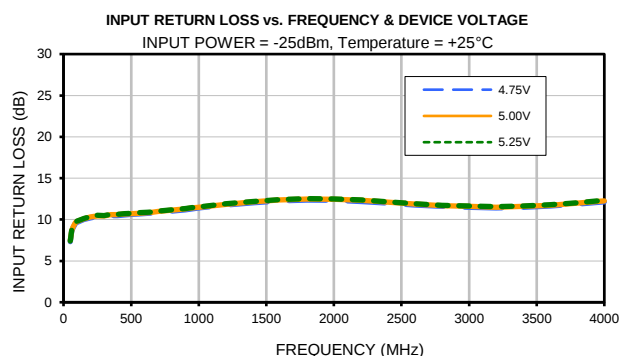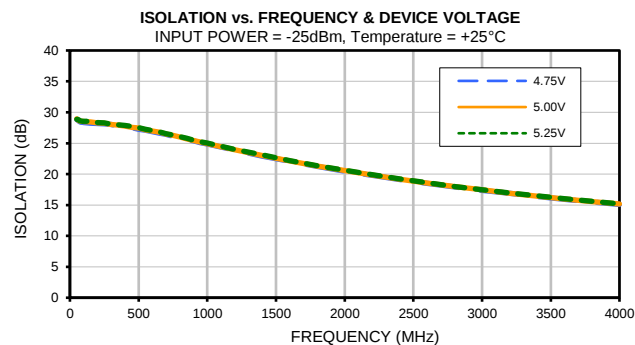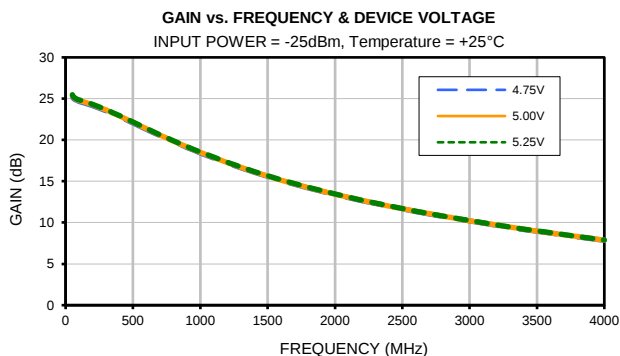



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C or -40° to 105° C or -55° to 105° C Ambient Environment	Refer to Individual Model Data Sheet
Storage Environment	20° to 35° C and 40 to 60% humidity (In Factory Shipped Package)	Individual Model Data Sheet