

Programmable Attenuator

RC4DAT-8G-95

50Ω 0 – 95 dB, 0.25 dB step 1 to 8000 MHz

The Big Deal

- Four independently programmable channels
- Over 100 dB Isolation between channels
- Supports U-NII bands 5-8 (5.925 to 7.125 GHz)
- Fine attenuation resolution, 0.25 dB
- Automation via Ethernet & USB

Applications

- Wi-Fi 6E MIMO development
- LTE / 5G / IoT / Bluetooth / Zigbee
- Cellular handover testing
- C-band radar / satcom testing
- Automated signal sweeping / fading



Generic photo used for illustration purposes only

Software Package

Case Style: QE2972

Included Accessories

Model No.	Description	Qty.
USB-CBL-AC-3+	3.3 ft. USB cable	1

RoHS Compliant

See our web site for RoHS Compliance methodologies and qualifications

Product Overview

Mini-Circuits' RC4DAT-8G-95 is a 4-channel programmable attenuator capable of supporting a wide range of signal level control applications from 1 MHz to 8 GHz. All 4 channels can be independently controlled with 0.25 dB attenuation resolution and more than 100 dB isolation between the channels. The dynamic range of each channel is 0 to 95 dB for applications up to 7.2 GHz and 0 to 90 dB up to 8 GHz. The unique attenuation design maintains linear attenuation change per dB, even at the highest attenuation settings.

All 4 bi-directional RF channels are housed in a single, compact and rugged package with SMA female connectors on all RF ports, a standard Ethernet port (RJ45) and a USB type C power and control port.

The attenuator can be controlled via USB or Ethernet (supporting HTTP, Telnet and SSH network protocols). Full software support is provided and can be downloaded from our website any time at <http://www.minicircuits.com/softwaredownload/patt.html>. The package includes our user-friendly GUI application for Windows® and a full API with programming instructions for Windows® and Linux® environments (both 32-bit and 64-bit systems).

Key Features

Feature	Advantages
USB & Ethernet control	USB HID and Ethernet (HTTP / Telnet / SSH) interfaces provide easy compatibility with a wide range of software setups and programming environments. The device draws all power requirements through the USB port.
Programmable attenuation sweep and Hop sequences	The RC4DAT-8G-95 can be programmed with a timed sequence of attenuation settings, to run without any additional external control
95 dB attenuation range	The RC4DAT-8G-95 provides high-accuracy attenuation up to 95 dB, allowing the user precise level control over a broad attenuation and frequency range.
High linearity	Typical input IP3 of +51 dBm up to 8000 MHz

Trademarks: Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Linux is a registered trademark of Linus Torvalds. Mac is a registered trademark of Apple Corporation. Pentium is a registered trademark of Intel Corporation. Neither Mini-Circuits nor the Mini-Circuits RC4DAT-series attenuators are affiliated with or endorsed by the owners of the above referenced trademarks.

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation.



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Rev. H
ECO-020129
EDR-11736/4
RC4DAT-8G-95
MCIL
231212
Page 1 of 10

Electrical Specifications ^{1,2} at 0 to +50°C

Parameter	Frequency range	Conditions	Min.	Typ.	Max.	Units
Attenuation range	1 - 7200 MHz	0.25 dB step	0	–	95	dB
	7200 - 8000 MHz		0	–	90	
Attenuation accuracy ³	1 - 2000 MHz	0.25 - 20 dB	-0.7	0.4	0.4+5% of nominal value	dB
		20.25 - 60 dB	-0.4-0.5% of nominal value	1.7	0.9+4.5% of nominal value	
		60.25 - 80 dB	-0.4-0.5% of nominal value	3.0	-0.4+6% of nominal value	
		80.25 - 95 dB	-0.4-0.5% of nominal value	3.7	-3.6+10% of nominal value	
	2000 - 4000 MHz	0.25 - 20 dB	-0.7	1.0	0.4+5% of nominal value	
		20.25 - 60 dB	-0.7	1.0	0.8+4.5% of nominal value	
		60.25 - 80 dB	-0.6-1% of nominal value	2.0	-0.8+6.5% of nominal value	
		80.25 - 95 dB	-0.6-1% of nominal value	2.8	-3+9% of nominal value	
	4000 - 6000 MHz	0.25 - 20 dB	-0.4-5% of nominal value	-0.2	0.75+4% of nominal value	
		20.25 - 60 dB	-0.5-4.5% of nominal value	-0.6	1.2+2% of nominal value	
		60.25 - 80 dB	-0.2-5% of nominal value	-1.7	2+0.5% of nominal value	
		80.25 - 95 dB	3-9% of nominal value	-2.3	2+0.5% of nominal value	
	6000 - 7200 MHz	0.25 - 20 dB	-0.4-5% of nominal value	-0.5	0.7	
		20.25 - 60 dB	-0.7-4.5% of nominal value	-1.8	0.7	
		60.25 - 80 dB	0.2-6% of nominal value	-3.0	0.9	
		80.25 - 95 dB	3.6-10% of nominal value	-3.7	0.9	
	7200 - 8000 MHz	0.25 - 20 dB	-0.6-6% of nominal value	-0.6	0.3	
		20.25 - 60 dB	-1.2-4.5% of nominal value	-2.1	0.3	
		60.25 - 80 dB	-0.7-4.5% of nominal value	-2.7	0.2+2% of nominal value	
		80.25 - 90 dB	-0.7-4.5% of nominal value	-2.9	-1.7+6% of nominal value	
Insertion Loss	1 - 2000 MHz	0 dB	–	4.2	6.0	dB
	2000 - 4000 MHz		–	5.6	8.0	
	4000 - 6000 MHz		–	7.4	9.0	
	6000 - 7200 MHz		–	8.3	11.5	
	7200 - 8000 MHz		–	10	12.0	
Isolation In - Out (within a channel)	1 - 8000 MHz	Note 4	–	100	–	dB
Isolation (between channels) ⁵	1 - 8000 MHz	0 - 95 dB	100	125	–	
Input operating power ⁶ (RF In and RF Out out ports)	1 - 50 MHz	0 - 95 dB	–	–	Note 7	dBm
	50 - 8000 MHz		–	–	+28	
IP3 Input ⁸	1 - 5000 MHz	0 dB setting (P _{IN} =+5 dBm)	–	+53	–	dBm
	5000 - 8000 MHz		–	+48	–	
VSWR	1 - 2000 MHz	0 - 95 dB	–	1.15	–	:1
	2000 - 4000 MHz		–	1.20	–	
	4000 - 6000 MHz		–	1.25	–	
	6000 - 7200 MHz		–	1.50	–	
	7200 - 8000 MHz	0 - 90 dB	–	1.80	–	
Min Dwell Time per channel ⁹	1 - 8000 MHz	High speed mode	–	600	–	µsec
Channel Synchronization ¹⁰	1 - 8000 MHz	Note 9	–	400	–	µsec
Attenuation Transition Time ¹¹	1 - 8000 MHz	–	–	650	–	nsec
Supply Voltage	–	via USB port	4.75	5	5.25	V
USB current draw	–	–	–	210	330	mA
Ethernet Communication	Protocol	TCP / IP, HTTP, Telnet, DHCP, UDP (limited), SSH				
	Max Data Rate	100 Mbps (100 Base-T Full Duplex)				
USB Communication	Protocol	HID (Human Interface Device) - High Speed				
	Min Communication Time ¹²	400 µs typ (full transmit/recieve cycle)				

¹ Attenuator RF ports are interchangeable, and support simultaneous, bidirectional signal transmission, however the specifications are guaranteed for the RF in and RF out as noted on the label. There may be minor changes in performance when injecting signals to the RF Out port.

² RF performance specified per channel, performance of all four channels is identical.

³ Min/Max accuracy defined as [absolute error+% of attenuation setting] for example when setting the attenuator to 90 dB attenuation the maximum error at 7500 MHz will be Min=(-0.7-0.045x90)= (-0.7-4.05)= -4.75 dB, Max=(-1.7+0.06*90)=(-1.7+5.4)=3.7 dB, meaning actual attenuation will be in the 93.7 to 85.25 dB range.

⁴ Isolation In-Out is defined as max attenuation plus insertion loss; this is the path loss through the attenuator when initially powered up. After a brief delay (~0.5 sec typically) the attenuator will revert to a user defined "power-up" state (either max attenuation or a pre-set value).

⁵ Isolation between channels may drop to 95 dB when both channels being tested are at 0 dB attenuation state.

⁶ Total operating input power per channel from both RF In and RF Out out ports. Compression level not noted as it exceeds max safe operating power level.

⁷ Derate linearly from +28 dBm at 50 MHz to +17 dBm at 1MHz.

⁸ Tested with 1 MHz span between signals.


⁹ Minimum Dwell Time is the time the module will take to respond to a command to change attenuation states in a channel without communication delays. In PC control add communication delays (on the order of msec for USB) to get actual response time.

¹⁰ Channel Synchronization is the delay between the first and last attenuator transitions beginning, in response to a command to set all channels.


¹¹ Attenuation Transition Time is specified as the time between starting to change the attenuation state and settling on the requested attenuation state.

¹² USB min communication time is based on the polling interval of the USB HID protocol(125 µs polling interval, 64 bytes per packet), medium CPU load and no other high speed USB devices using the USB bus.

Programmable Attenuator response to communication interrupt

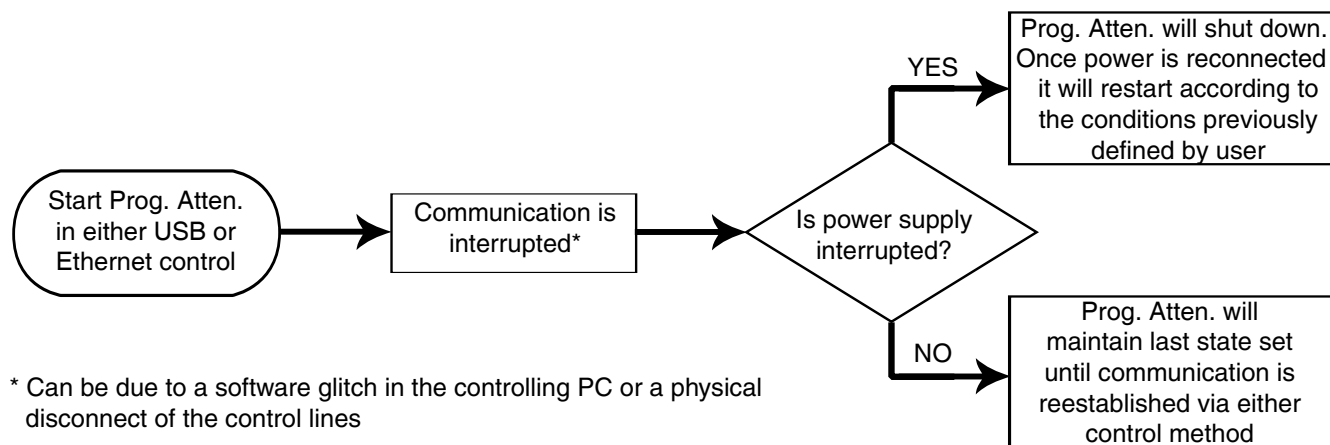

Block Diagram

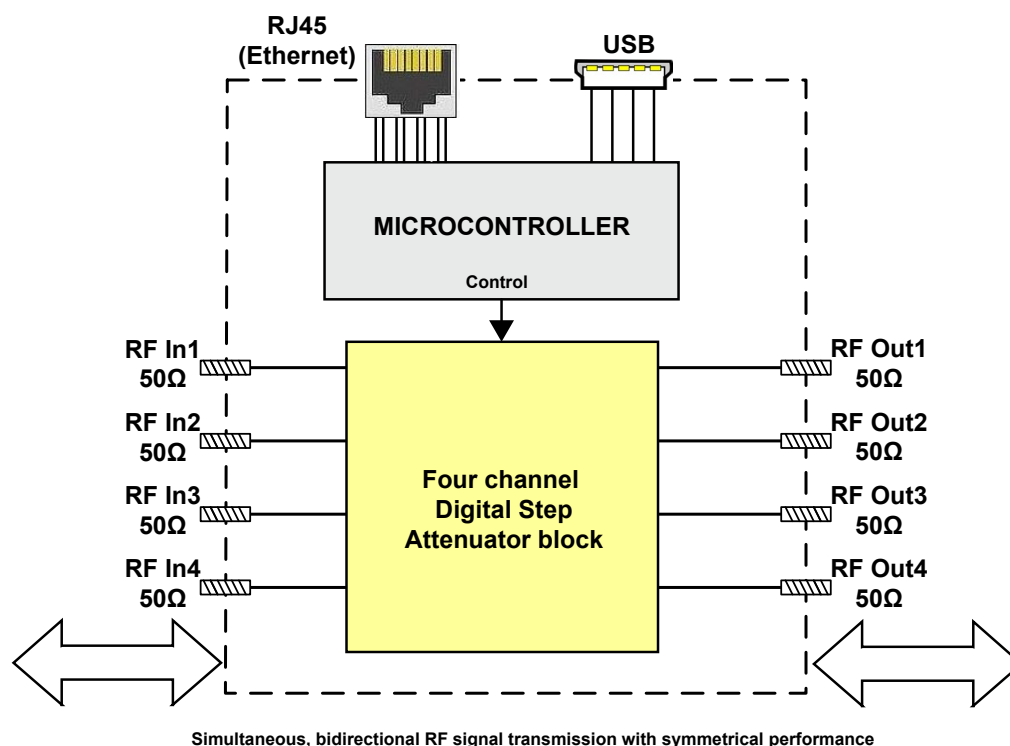

Connections


RF In 1,2,3,4	(SMA female)
RF Out 1,2,3,4	(SMA female)
USB	(USB type C female)
Network (Ethernet/LAN)	(RJ45 socket)

Absolute Maximum Ratings

Operating Temperature	0°C to 50°C	
Storage Temperature	-20°C to 85°C	
V _{USB} Max.	6V	
DC voltage at RF port	16V	
Total RF power for RF In & RF Out	@ 1 - 50 MHz	Derates linearly from +33 @ 50 MHz to +20 @ 1 MHz
	@ 50 - 8000 MHz	+33 dBm




Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

Outline Drawing (QE2972)

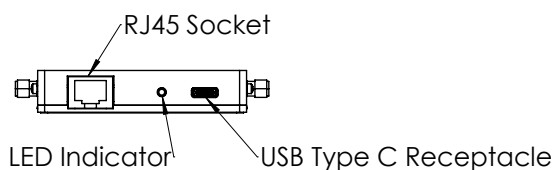

Connections

RF IN 1, 2, 3, 4	(SMA female)
RF OUT 1, 2, 3, 4	(SMA female)
USB	(USB type C female)
Network (Ethernet/LAN)	(RJ45 socket)

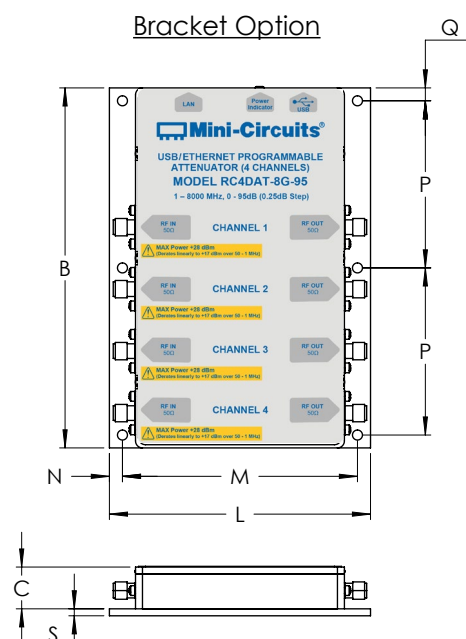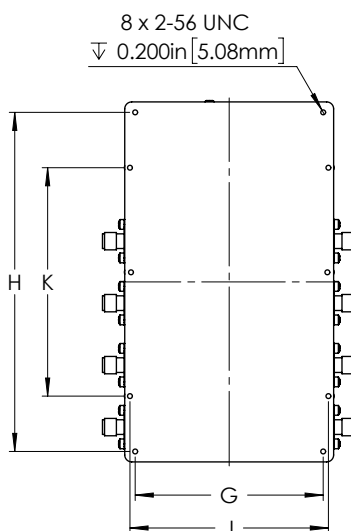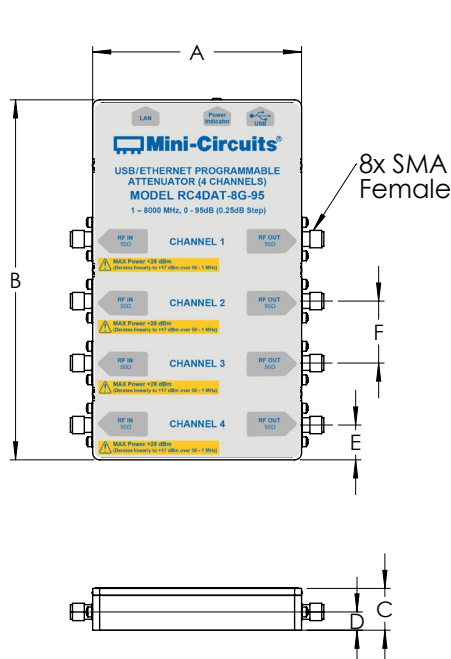

Instruction for mounting bracket:







1. Tool required: Phillips head screwdriver
2. Mount the bracket over threaded holes on the bottom side with the fasteners provided with the bracket.

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	WT. GRAMS
3.00	5.17	0.600	0.262	0.50	0.89	2.700	4.870	2.850	3.280	3.75	3.375	0.188	2.400	0.185	0.144	0.100	300
76.2	131.3	15.24	6.65	12.7	22.6	68.58	123.7	72.39	83.31	95.25	85.72	4.76	60.96	4.70	3.66	2.54	

Typical Performance Curves *


*at +25°C unless noted otherwise

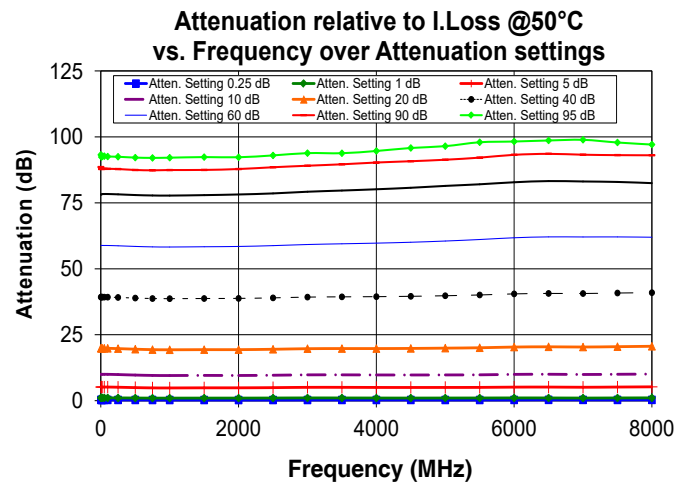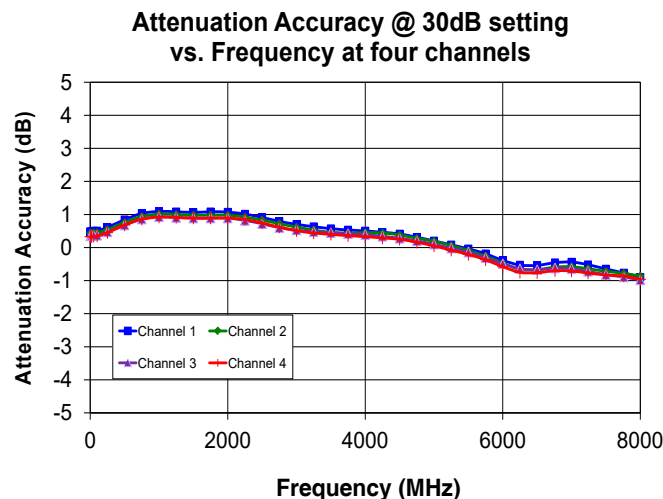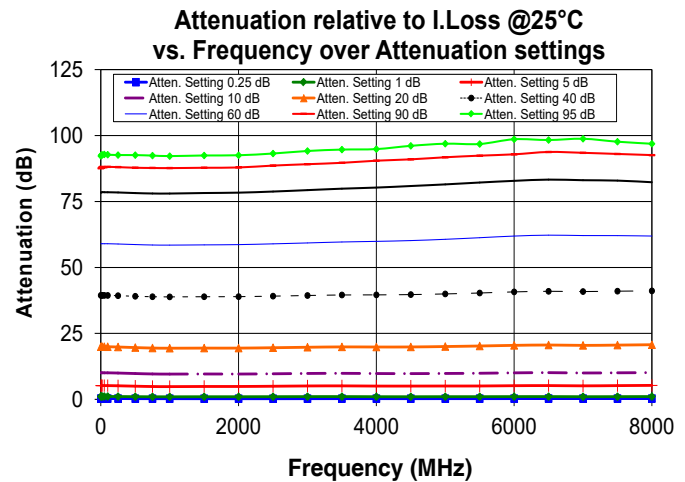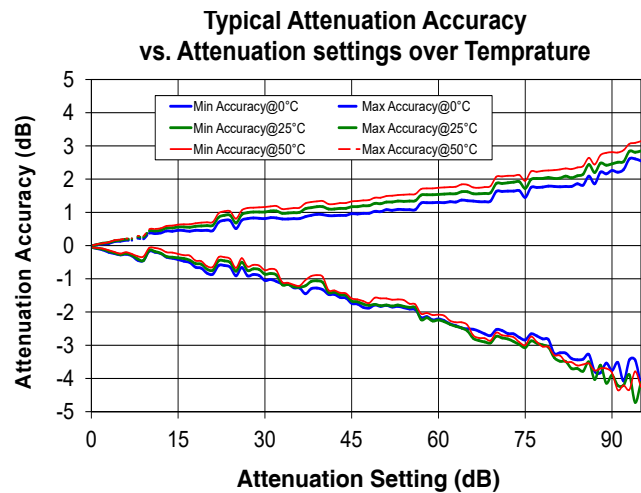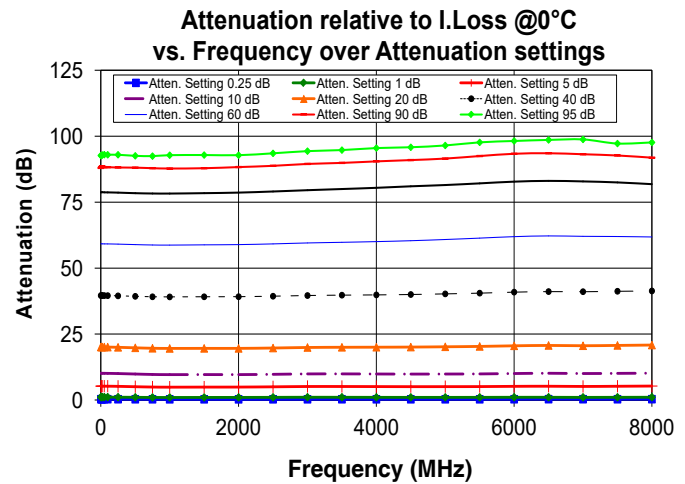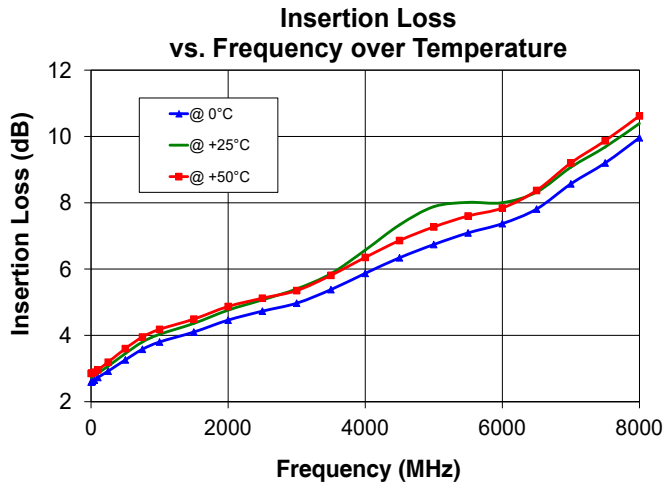


Typical Performance Curves (Continued) *

*at +25°C unless noted otherwise


**Attenuation Accuracy @ 60dB setting
vs. Frequency at four channels**

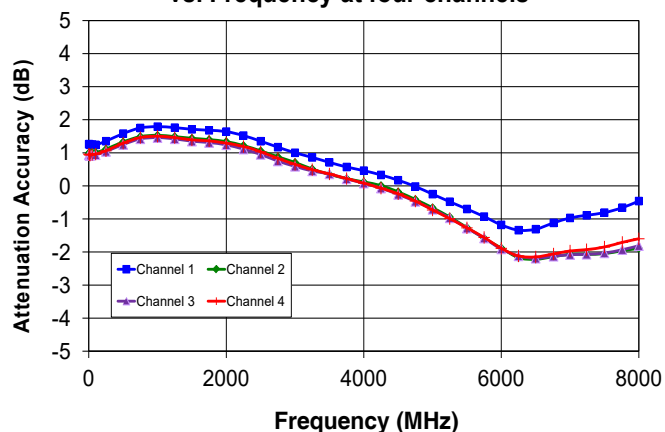


**Attenuation Accuracy @ 90dB setting
vs. Frequency at four channels**

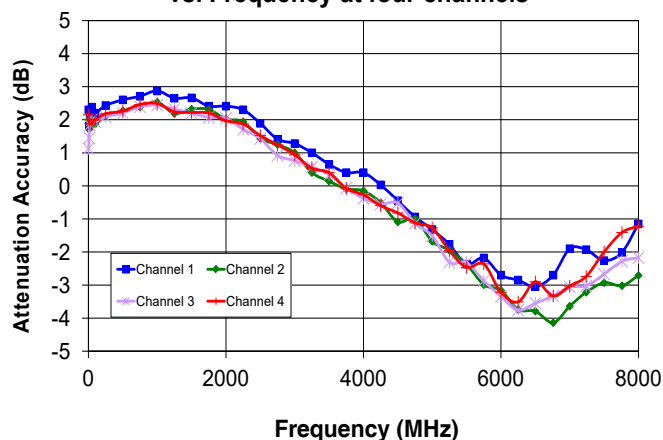


**Input VSWR
over Attenuation settings**

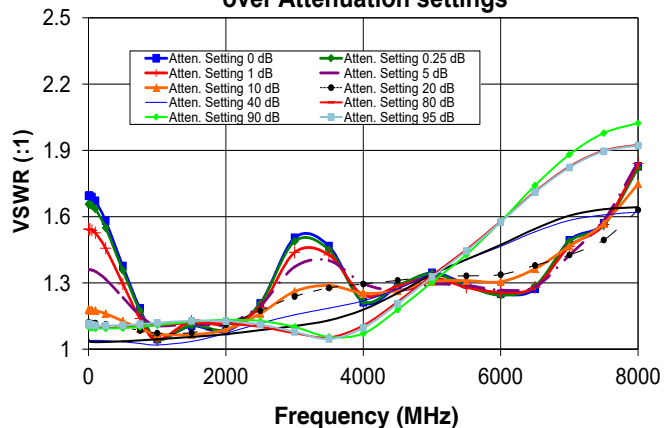


**Output VSWR
over Attenuation settings**

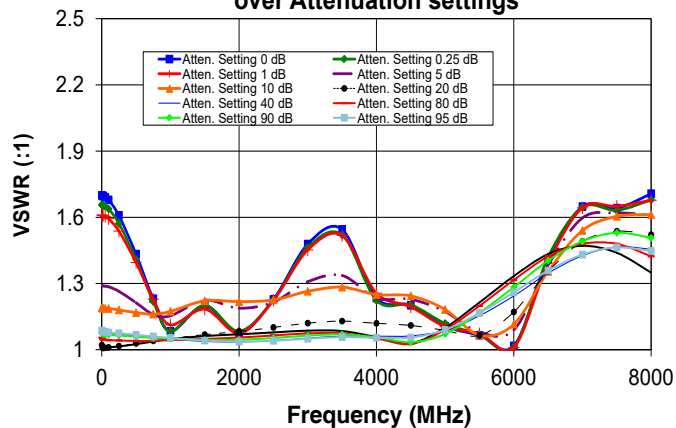

**Isolation between channels
vs. Frequency**

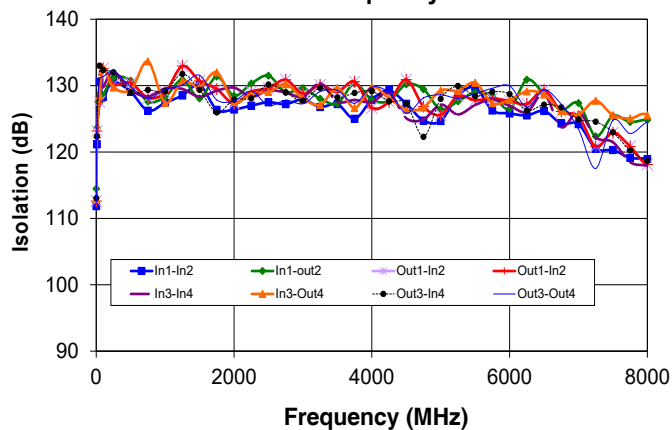

IP3 @ 0dB Attenuation

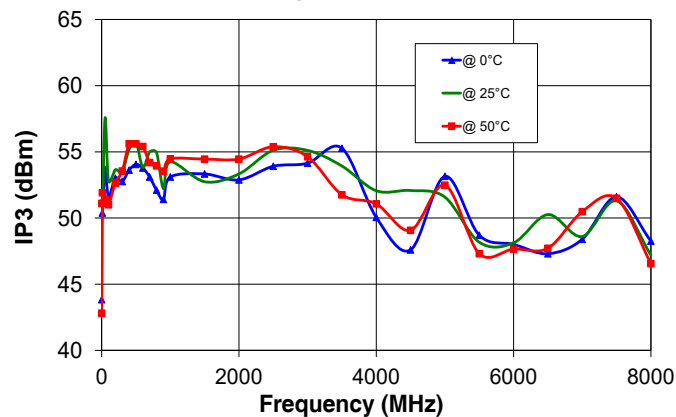

Typical Performance Data*

*at +25°C unless noted otherwise

FREQ. (MHz)	Attenuation relative to I. Loss @ 0°C (dB)									Attenuation relative to I. Loss @ +25°C (dB)									Attenuation relative to I. Loss @ +50°C (dB)								
	@ Attenuation setting (dB)									@ Attenuation setting (dB)									@ Attenuation setting (dB)								
	0.25	5	10	20	40	60	80	90	95	0.25	5	10	20	40	60	80	90	95	0.25	5	10	20	40	60	80	90	95
1	0.30	5.25	10.14	20.09	39.60	59.20	78.74	87.99	92.69	0.29	5.21	10.05	19.96	39.41	59.01	78.39	87.60	92.27	0.29	5.17	9.98	19.86	39.26	58.83	78.14	88.56	93.21
20	0.30	5.25	10.13	20.08	39.60	59.19	78.79	88.53	92.91	0.29	5.20	10.05	19.96	39.41	59.00	78.55	88.12	92.66	0.29	5.17	9.98	19.86	39.26	58.85	78.31	87.88	92.62
100	0.30	5.23	10.10	20.05	39.56	59.16	78.71	88.27	92.96	0.29	5.19	10.04	19.94	39.39	58.99	78.50	88.13	92.74	0.29	5.16	9.97	19.85	39.24	58.83	78.34	87.88	92.55
300	0.29	5.15	10.01	19.94	39.45	59.05	78.57	88.13	92.77	0.28	5.11	9.92	19.81	39.25	58.85	78.39	88.04	92.67	0.28	5.06	9.84	19.70	39.08	58.67	78.16	87.82	92.50
500	0.28	5.04	9.86	19.78	39.30	58.90	78.41	88.09	92.56	0.27	4.99	9.77	19.64	39.07	58.68	78.19	87.81	92.58	0.27	4.95	9.69	19.52	38.90	58.48	77.95	87.45	92.14
700	0.27	4.94	9.73	19.64	39.16	58.77	78.29	87.86	92.52	0.26	4.89	9.64	19.49	38.92	58.53	78.06	87.67	92.32	0.26	4.86	9.57	19.38	38.74	58.33	77.81	87.30	92.02
900	0.26	4.88	9.65	19.56	39.08	58.71	78.22	87.80	92.81	0.26	4.84	9.57	19.41	38.84	58.47	77.99	87.65	92.25	0.25	4.82	9.51	19.31	38.67	58.27	77.74	87.22	92.02
1000	0.26	4.87	9.64	19.55	39.08	58.71	78.27	87.76	92.81	0.26	4.84	9.56	19.40	38.84	58.47	78.01	87.68	92.20	0.25	4.82	9.51	19.30	38.67	58.26	77.75	87.43	92.11
1200	0.26	4.88	9.64	19.55	39.09	58.74	78.32	88.02	92.72	0.25	4.86	9.58	19.42	38.85	58.49	78.05	87.64	92.38	0.25	4.84	9.53	19.32	38.68	58.29	77.83	87.43	92.01
1400	0.26	4.90	9.66	19.57	39.12	58.79	78.38	87.93	92.68	0.25	4.88	9.60	19.44	38.89	58.54	78.11	87.74	92.55	0.25	4.87	9.55	19.34	38.72	58.34	77.86	87.47	92.10
1600	0.25	4.91	9.66	19.57	39.13	58.83	78.50	88.11	92.65	0.25	4.89	9.60	19.44	38.90	58.57	78.19	87.81	92.32	0.25	4.88	9.55	19.35	38.74	58.38	77.96	87.65	92.21
1800	0.25	4.91	9.65	19.56	39.14	58.86	78.53	88.22	93.04	0.25	4.89	9.58	19.43	38.91	58.61	78.19	87.73	92.68	0.25	4.87	9.54	19.35	38.75	58.42	78.09	87.66	92.38
2000	0.25	4.91	9.65	19.57	39.16	58.90	78.63	88.31	92.80	0.25	4.89	9.58	19.44	38.93	58.66	78.35	87.92	92.52	0.24	4.87	9.53	19.35	38.77	58.47	78.17	87.81	92.27
2100	0.25	4.92	9.66	19.58	39.18	58.94	78.64	88.31	93.01	0.25	4.90	9.59	19.45	38.95	58.70	78.46	88.11	92.96	0.24	4.87	9.53	19.35	38.79	58.52	78.22	87.85	92.61
2400	0.25	4.98	9.72	19.66	39.29	59.09	78.92	88.71	93.27	0.25	4.95	9.65	19.54	39.07	58.88	78.68	88.29	93.11	0.25	4.91	9.59	19.44	38.91	58.69	78.45	88.28	93.07
2700	0.26	5.06	9.82	19.79	39.45	59.33	79.23	89.06	93.85	0.26	5.01	9.73	19.65	39.21	59.09	78.97	88.51	93.64	0.25	4.99	9.69	19.59	39.10	58.95	78.88	88.42	93.19
3000	0.27	5.12	9.90	19.91	39.60	59.53	79.54	89.50	94.34	0.26	5.07	9.80	19.76	39.36	59.29	79.31	89.15	94.14	0.26	5.05	9.77	19.71	39.26	59.20	79.21	89.07	93.84
3300	0.27	5.13	9.92	19.97	39.70	59.68	79.85	89.73	94.37	0.27	5.10	9.85	19.85	39.49	59.52	79.66	89.48	94.17	0.27	5.06	9.79	19.75	39.34	59.38	79.45	89.40	94.16
3600	0.28	5.12	9.90	19.99	39.76	59.83	80.05	89.91	94.99	0.27	5.09	9.84	19.89	39.58	59.70	79.96	90.06	94.79	0.27	5.04	9.76	19.75	39.37	59.52	79.71	89.51	94.06
3900	0.27	5.10	9.87	20.00	39.82	59.98	80.31	90.57	94.99	0.27	5.05	9.79	19.86	39.60	59.84	80.19	90.24	95.19	0.27	5.02	9.74	19.76	39.42	59.67	80.05	90.05	94.49
4200	0.27	5.07	9.85	20.02	39.89	60.15	80.63	90.75	96.03	0.27	5.01	9.73	19.82	39.62	59.96	80.36	90.53	95.53	0.27	5.01	9.72	19.78	39.48	59.84	80.35	90.29	95.43
4500	0.27	5.06	9.84	20.06	39.99	60.38	81.01	90.96	95.81	0.26	5.03	9.74	19.87	39.71	60.18	80.87	90.98	96.09	0.27	5.00	9.72	19.81	39.56	60.05	80.71	90.78	95.80
4800	0.27	5.07	9.85	20.12	40.13	60.65	81.32	91.37	96.42	0.27	5.06	9.78	19.97	39.86	60.46	81.16	91.37	95.86	0.26	5.01	9.73	19.87	39.68	60.33	81.00	91.19	96.17
5100	0.27	5.08	9.87	20.20	40.28	60.96	81.69	91.67	96.56	0.27	5.05	9.81	20.07	40.01	60.76	81.61	92.01	97.00	0.26	5.02	9.75	19.95	39.84	60.63	81.50	91.55	96.96
5400	0.27	5.08	9.89	20.28	40.45	61.25	81.99	91.91	97.34	0.27	5.06	9.86	20.19	40.23	61.13	82.00	92.13	97.18	0.26	5.02	9.77	20.03	40.01	60.97	81.86	91.93	97.78
5700	0.28	5.11	9.94	20.38	40.65	61.58	82.40	92.80	97.20	0.27	5.09	9.92	20.30	40.46	61.52	82.44	92.47	97.80	0.27	5.05	9.82	20.15	40.22	61.34	82.50	92.27	97.02
6000	0.29	5.18	10.04	20.54	40.89	61.93	82.77	93.35	98.19	0.28	5.16	10.03	20.47	40.73	61.88	82.84	92.87	98.59	0.28	5.13	9.95	20.33	40.48	61.74	82.80	93.22	98.26
6300	0.31	5.24	10.15	20.68	41.08	62.16	83.09	93.16	98.10	0.30	5.23	10.14	20.62	40.94	62.21	83.22	93.65	98.66	0.30	5.18	10.03	20.45	40.65	62.03	83.19	93.39	97.98
6600	0.31	5.19	10.10	20.63	41.08	62.17	83.08	93.54	98.82	0.31	5.16	10.05	20.53	40.90	62.19	83.24	93.85	98.56	0.31	5.11	9.95	20.37	40.62	62.03	83.19	93.12	98.25
6900	0.31	5.15	10.05	20.58	41.05	62.08	82.99	93.25	98.69	0.30	5.11	9.99	20.46	40.85	62.08	83.17	93.49	99.07	0.30	5.08	9.91	20.33	40.60	62.02	83.06	93.29	98.75
7200	0.30	5.17	10.06	20.61	41.12	62.02	82.76	92.97	98.79	0.29	5.14	10.01	20.49	40.91	62.06	83.02	93.15	98.69	0.29	5.11	9.94	20.39	40.69	62.06	83.10	93.07	98.91
7500	0.29	5.21	10.10	20.69	41.22	61.98	82.48	92.70	97.22	0.29	5.19	10.05	20.57	41.00	62.05	82.93	93.01	97.66	0.29	5.16	9.99	20.47	40.81	62.06	82.92	93.10	97.88
7800	0.30	5.24	10.12	20.75	41.28	61.86	82.09	92.13	97.21	0.29	5.22	10.07	20.63	41.05	61.94	82.53	92.86	97.10	0.29	5.19	10.02	20.54	40.88	61.99	82.69	93.04	97.59
8000	0.31	5.29	10.17	20.83	41.34	61.81	81.82	91.87	97.64	0.30	5.27	10.12	20.71	41.11	61.89	82.31	92.58	96.88	0.30	5.24	10.07	20.62	40.94	61.94	82.47	93.05	97.10

Typical Performance Data(Continued)*

*at +25°C unless noted otherwise

FREQ. (MHz)	Insertion Loss (dB)			VSWR In (:1)													VSWR Out (:1)												
				@ Attenuation setting (dB)													@ Attenuation setting (dB)												
	0°C	25°C	50°C	0	0.25	1	5	10	20	40	60	80	90	95	0	0.25	1	5	10	20	40	60	80	90	95				
1	2.59	2.73	2.85	1.70	1.66	1.54	1.36	1.18	1.12	1.05	1.04	1.11	1.10	1.12	1.70	1.66	1.61	1.29	1.19	1.02	1.08	1.02	1.05	1.08	1.09				
20	2.61	2.76	2.87	1.69	1.65	1.54	1.36	1.18	1.12	1.04	1.03	1.10	1.10	1.11	1.70	1.65	1.61	1.29	1.19	1.01	1.08	1.01	1.05	1.07	1.08				
100	2.73	2.86	2.96	1.67	1.64	1.53	1.35	1.17	1.12	1.04	1.03	1.10	1.09	1.11	1.68	1.64	1.59	1.29	1.19	1.01	1.07	1.01	1.04	1.07	1.08				
300	2.98	3.14	3.27	1.54	1.51	1.43	1.30	1.16	1.11	1.04	1.03	1.10	1.09	1.11	1.58	1.55	1.51	1.26	1.18	1.02	1.07	1.02	1.04	1.06	1.07				
500	3.26	3.45	3.60	1.38	1.36	1.30	1.23	1.13	1.10	1.03	1.04	1.10	1.10	1.11	1.43	1.41	1.40	1.21	1.17	1.03	1.06	1.03	1.04	1.06	1.07				
700	3.52	3.74	3.89	1.22	1.21	1.17	1.17	1.10	1.09	1.03	1.04	1.10	1.10	1.11	1.27	1.26	1.26	1.17	1.16	1.04	1.06	1.04	1.04	1.05	1.06				
900	3.72	3.96	4.10	1.09	1.09	1.07	1.12	1.08	1.08	1.02	1.04	1.11	1.11	1.12	1.13	1.12	1.15	1.15	1.17	1.05	1.05	1.04	1.04	1.05	1.06				
1000	3.80	4.03	4.18	1.05	1.04	1.04	1.11	1.07	1.07	1.02	1.04	1.11	1.11	1.12	1.08	1.08	1.11	1.15	1.17	1.05	1.05	1.05	1.04	1.05	1.05				
1200	3.91	4.16	4.31	1.04	1.04	1.07	1.10	1.06	1.07	1.02	1.05	1.11	1.12	1.12	1.11	1.12	1.13	1.19	1.19	1.06	1.04	1.06	1.05	1.05	1.05				
1400	4.03	4.29	4.43	1.09	1.09	1.11	1.11	1.06	1.07	1.03	1.05	1.12	1.12	1.13	1.18	1.19	1.17	1.22	1.22	1.07	1.04	1.06	1.05	1.04	1.04				
1600	4.17	4.44	4.57	1.12	1.12	1.14	1.12	1.07	1.08	1.04	1.06	1.12	1.13	1.13	1.20	1.20	1.18	1.23	1.23	1.07	1.04	1.06	1.05	1.04	1.04				
1800	4.32	4.60	4.72	1.11	1.12	1.14	1.12	1.08	1.09	1.06	1.06	1.12	1.13	1.13	1.15	1.16	1.14	1.21	1.22	1.08	1.03	1.07	1.05	1.04	1.04				
2000	4.46	4.76	4.87	1.08	1.09	1.11	1.11	1.09	1.11	1.07	1.07	1.12	1.13	1.13	1.07	1.08	1.08	1.19	1.22	1.08	1.03	1.07	1.06	1.05	1.04				
2100	4.53	4.83	4.94	1.07	1.08	1.10	1.12	1.10	1.12	1.08	1.07	1.11	1.13	1.13	1.05	1.06	1.06	1.18	1.22	1.09	1.04	1.07	1.06	1.05	1.04				
2400	4.69	5.01	5.09	1.15	1.15	1.14	1.17	1.14	1.16	1.11	1.08	1.11	1.13	1.12	1.17	1.17	1.17	1.20	1.22	1.10	1.04	1.08	1.06	1.05	1.04				
2700	4.81	5.19	5.20	1.34	1.33	1.30	1.27	1.20	1.20	1.13	1.09	1.09	1.12	1.10	1.34	1.33	1.32	1.25	1.24	1.11	1.05	1.08	1.07	1.06	1.04				
3000	4.97	5.40	5.35	1.50	1.49	1.44	1.37	1.26	1.24	1.16	1.10	1.07	1.10	1.08	1.48	1.46	1.45	1.31	1.26	1.12	1.05	1.09	1.07	1.06	1.05				
3300	5.20	5.65	5.61	1.53	1.51	1.47	1.41	1.29	1.27	1.17	1.12	1.06	1.07	1.05	1.56	1.54	1.53	1.34	1.28	1.13	1.06	1.09	1.08	1.07	1.05				
3600	5.48	5.98	5.92	1.42	1.40	1.39	1.39	1.28	1.28	1.19	1.14	1.06	1.05	1.05	1.51	1.48	1.49	1.32	1.28	1.13	1.06	1.08	1.07	1.07	1.06				
3900	5.77	6.41	6.24	1.25	1.25	1.27	1.32	1.26	1.29	1.21	1.17	1.09	1.06	1.08	1.30	1.28	1.31	1.25	1.26	1.12	1.06	1.07	1.06	1.06	1.06				
4200	6.07	6.89	6.57	1.19	1.20	1.22	1.27	1.25	1.30	1.24	1.21	1.15	1.11	1.14	1.18	1.18	1.20	1.22	1.25	1.12	1.06	1.04	1.04	1.05	1.05				
4500	6.34	7.33	6.86	1.28	1.29	1.28	1.27	1.26	1.31	1.27	1.25	1.21	1.18	1.21	1.20	1.20	1.19	1.23	1.24	1.11	1.06	1.03	1.03	1.03	1.05				
4800	6.59	7.69	7.13	1.35	1.35	1.33	1.29	1.29	1.32	1.31	1.30	1.29	1.25	1.28	1.22	1.12	1.13	1.12	1.19	1.21	1.10	1.07	1.06	1.06	1.05	1.07			
5100	6.81	7.95	7.34	1.33	1.33	1.31	1.29	1.31	1.33	1.36	1.35	1.36	1.33	1.35	1.12	1.13	1.11	1.16	1.17	1.08	1.10	1.12	1.11	1.09	1.10				
5400	7.03	8.01	7.54	1.29	1.28	1.28	1.29	1.31	1.33	1.39	1.39	1.43	1.40	1.42	1.09	1.10	1.09	1.11	1.09	1.06	1.14	1.19	1.18	1.15	1.15				
5700	7.22	8.01	7.71	1.31	1.30	1.29	1.29	1.31	1.33	1.43	1.43	1.50	1.49	1.50	1.05	1.04	1.05	1.03	1.03	1.09	1.19	1.26	1.25	1.21	1.20				
6000	7.37	8.00	7.84	1.25	1.24	1.26	1.27	1.31	1.34	1.47	1.47	1.58	1.58	1.58	1.02	1.01	1.01	1.09	1.12	1.17	1.24	1.33	1.32	1.28	1.26				
6300	7.57	8.09	8.07	1.18	1.19	1.21	1.25	1.33	1.36	1.51	1.52	1.66	1.68	1.66	1.19	1.21	1.19	1.25	1.25	1.28	1.31	1.40	1.39	1.36	1.32				
6600	8.04	8.55	8.63	1.36	1.37	1.35	1.32	1.39	1.39	1.55	1.56	1.75	1.78	1.74	1.54	1.54	1.51	1.47	1.42	1.40	1.37	1.45	1.44	1.43	1.38				
6900	8.43	8.94	9.05	1.47	1.47	1.45	1.40	1.45	1.42	1.58	1.59	1.81	1.86	1.80	1.65	1.64	1.63	1.58	1.51	1.47	1.41	1.47	1.47	1.48	1.42				
7200	8.82	9.31	9.46	1.51	1.50	1.49	1.48	1.50	1.45	1.60	1.62	1.86	1.92	1.86	1.62	1.62	1.63	1.61	1.58	1.52	1.45	1.47	1.49	1.51	1.45				
7500	9.20	9.68	9.87	1.57	1.56	1.56	1.58	1.57	1.49	1.61	1.63	1.90	1.98	1.90	1.64	1.63	1.65	1.62	1.60	1.54	1.47	1.44	1.48	1.53	1.46				
7800	9.66	10.11	10.33	1.73	1.72	1.73	1.74	1.67	1.57	1.62	1.64	1.92	2.01	1.92	1.73	1.71	1.71	1.63	1.62	1.53	1.46	1.39	1.45	1.52	1.46				
8000	9.96	10.39	10.62	1.83	1.82	1.84	1.85	1.75	1.63	1.62	1.64	1.92	2.02	1.92	1.71	1.68	1.68	1.61	1.61	1.52	1.46	1.35	1.42	1.51	1.45				

Software & Documentation Download:

- Mini-Circuits' full software and support package including user guide, Windows GUI, DLL files, programming manual and examples can be downloaded free of charge from <http://www.minicircuits.com/softwaredownload/patt.html>
- Please contact testsolutions@minicircuits.com for support


Minimum System Requirements

Parameter	Requirements	
Interface	USB HID or HTTP Get/Post or Telnet protocols or SSH protocols	
System requirements	GUI:	Windows 32 & 64 bit systems from Windows 98 up to Windows 10
	USB API (ActiveX & .Net)	Windows 32 & 64 bit systems with ActiveX or .Net support from Windows 98 up to Windows 10
	USB direct programming support	Linux, Windows systems from Windows 98 up to Windows 10
	HTTP, Telnet or SSH	Any computer with a network port and Ethernet-TCP/IP (HTTP, Telnet or SSH protocols) support
Hardware	Pentium® II or higher, RAM 256 MB	

Graphical User Interface (GUI) for Windows

Key Features:

- Manual attenuation setting
- Sweep and Hop attenuation sequences directed from the PC, or entire sequence loaded into RC4DAT.
- Attenuator address configuration and Firmware upgrade
- Attenuation at power up may be set to selected attenuation level or last attenuation state recorded.
- USB, HTTP or Telnet control of RC4DAT
- Setting Ethernet configuration

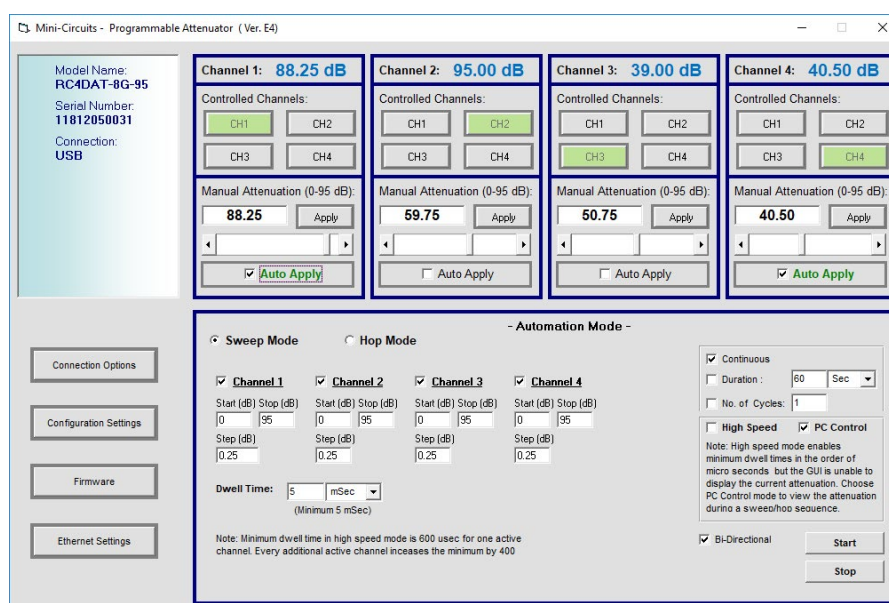

Application Programming Interface (API)

Programming manual: https://www.minicircuits.com/softwaredownload/Prog_Manual-6-Programmable_Attenuator.pdf

Windows Support:

- API DLL files exposing the full switch functionality
 - ActiveX COM DLL file for creation of 32-bit programs
 - .Net library DLL file for creation of 32 / 64-bit programs
- Supported by most common programming environments (refer to application note [AN-49-001](#) for summary of tested environments)

Linux Support:

- Full attenuator control in a Linux environment is achieved by way of USB interrupt commands.

Ordering Information

Model	Description
RC4DAT-8G-95	USB/Ethernet four channel Programmable Attenuator

Included Accessories	Part No.	Description
	USB-CBL-AC-3+	3.3 ft (1.0 m) USB Cable: USB type A(Male) to USB type C(Male)

Optional Accessories	Description
USB-AC/DC-5	AC/DC 5V _{DC} Power Adapter with US, EU, IL, UK, AUS, and China power plugs ^{13,14}
USB-CBL-AC-3+	3.3 ft (1.0 m) USB Cable: USB type A(Male) to USB type C(Male)
CBL-RJ45-MM-5+	5 ft (1.5 m) Ethernet cable: RJ45(Male) to RJ45(Male) Cat 5E cable
BKT-355-02+	Bracket kit including 3.75" x 5.17" bracket, mounting screws and washers

RKT-RC4DAT-2



¹³ The USB-AC/DC-5 may be used to provide the 5V_{DC} power input via USB port if operating the RC4DAT with Ethernet control. Not required if using USB control.

¹⁴ Power plugs for other countries are also available, if you need a power plug for a country not listed please contact testsolutions@minicircuits.com

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 0°C

FREQUENCY (MHz)	Attenuation relative to Insertion Loss (dB)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	0.30	1.09	5.25	10.14	20.09	39.60	59.20	78.74	87.99	92.69
5	0.30	1.09	5.25	10.13	20.09	39.60	59.21	78.72	88.00	92.67
10	0.30	1.09	5.25	10.13	20.08	39.60	59.21	78.74	88.30	92.63
20	0.30	1.09	5.25	10.13	20.08	39.60	59.19	78.79	88.53	92.91
50	0.30	1.09	5.24	10.12	20.07	39.58	59.17	78.73	88.28	93.00
100	0.30	1.09	5.23	10.10	20.05	39.56	59.16	78.71	88.27	92.96
200	0.29	1.08	5.19	10.06	19.99	39.50	59.10	78.61	88.23	93.07
300	0.29	1.06	5.15	10.01	19.94	39.45	59.05	78.57	88.13	92.77
500	0.28	1.03	5.04	9.86	19.78	39.30	58.90	78.41	88.09	92.56
700	0.27	1.00	4.94	9.73	19.64	39.16	58.77	78.29	87.86	92.52
900	0.26	0.98	4.88	9.65	19.56	39.08	58.71	78.22	87.80	92.81
1000	0.26	0.98	4.87	9.64	19.55	39.08	58.71	78.27	87.76	92.81
1200	0.26	0.98	4.88	9.64	19.55	39.09	58.74	78.32	88.02	92.72
1400	0.26	0.99	4.90	9.66	19.57	39.12	58.79	78.38	87.93	92.68
1500	0.26	0.99	4.90	9.66	19.57	39.13	58.81	78.42	87.88	92.86
1600	0.25	0.99	4.91	9.66	19.57	39.13	58.83	78.50	88.11	92.65
1800	0.25	0.99	4.91	9.65	19.56	39.14	58.86	78.53	88.22	93.04
2000	0.25	1.00	4.91	9.65	19.57	39.16	58.90	78.63	88.31	92.80
2100	0.25	1.00	4.92	9.66	19.58	39.18	58.94	78.64	88.31	93.01
2200	0.25	1.00	4.94	9.67	19.60	39.21	58.99	78.76	88.43	93.17
2400	0.25	1.01	4.98	9.72	19.66	39.29	59.09	78.92	88.71	93.27
2500	0.26	1.02	5.00	9.75	19.70	39.34	59.17	79.05	88.78	93.51
2700	0.26	1.04	5.06	9.82	19.79	39.45	59.33	79.23	89.06	93.85
2800	0.27	1.04	5.08	9.85	19.84	39.51	59.40	79.32	89.17	94.23
3000	0.27	1.05	5.12	9.90	19.91	39.60	59.53	79.54	89.50	94.34
3100	0.27	1.05	5.13	9.91	19.93	39.64	59.58	79.64	89.49	94.09
3300	0.27	1.05	5.13	9.92	19.97	39.70	59.68	79.85	89.73	94.37
3400	0.27	1.05	5.13	9.91	19.97	39.72	59.74	79.92	89.75	94.66
3600	0.28	1.04	5.12	9.90	19.99	39.76	59.83	80.05	89.91	94.99
3700	0.28	1.03	5.11	9.89	19.99	39.78	59.88	80.17	90.00	94.96
3900	0.27	1.02	5.10	9.87	20.00	39.82	59.98	80.31	90.57	94.99
4000	0.27	1.02	5.09	9.87	20.01	39.84	60.04	80.44	90.47	95.50
4200	0.27	1.01	5.07	9.85	20.02	39.89	60.15	80.63	90.75	96.03
4300	0.27	1.01	5.07	9.85	20.03	39.92	60.23	80.74	90.78	95.29
4500	0.27	1.01	5.06	9.84	20.06	39.99	60.38	81.01	90.96	95.81
4600	0.27	1.01	5.06	9.84	20.07	40.03	60.48	81.07	91.09	96.22
4800	0.27	1.01	5.07	9.85	20.12	40.13	60.65	81.32	91.37	96.42
4900	0.27	1.01	5.07	9.86	20.14	40.18	60.75	81.53	91.54	96.44
5100	0.27	1.01	5.08	9.87	20.20	40.28	60.96	81.69	91.67	96.56
5200	0.27	1.02	5.08	9.87	20.22	40.34	61.06	81.84	92.07	96.76
5400	0.27	1.02	5.08	9.89	20.28	40.45	61.25	81.99	91.91	97.34
5500	0.27	1.02	5.09	9.90	20.31	40.51	61.37	82.12	92.49	97.67
5700	0.28	1.03	5.11	9.94	20.38	40.65	61.58	82.40	92.80	97.20
5800	0.28	1.03	5.13	9.97	20.43	40.72	61.71	82.49	92.74	97.53
6000	0.29	1.04	5.18	10.04	20.54	40.89	61.93	82.77	93.35	98.19
6100	0.29	1.05	5.20	10.09	20.60	40.96	62.03	82.93	93.02	98.52
6300	0.31	1.05	5.24	10.15	20.68	41.08	62.16	83.09	93.16	98.10
6400	0.31	1.05	5.24	10.15	20.69	41.10	62.19	83.22	93.12	98.09
6600	0.31	1.03	5.19	10.10	20.63	41.08	62.17	83.08	93.54	98.82
6700	0.31	1.02	5.17	10.08	20.61	41.07	62.14	83.03	93.42	98.77
6900	0.31	1.01	5.15	10.05	20.58	41.05	62.08	82.99	93.25	98.69
7000	0.30	1.01	5.14	10.04	20.57	41.06	62.05	82.86	93.17	98.78
7200	0.30	1.01	5.17	10.06	20.61	41.12	62.02	82.76	92.97	98.79
7300	0.30	1.02	5.18	10.08	20.64	41.16	62.01	82.65	92.91	98.08
7500	0.29	1.03	5.21	10.10	20.69	41.22	61.98	82.48	92.70	97.22
7600	0.29	1.03	5.22	10.11	20.71	41.24	61.93	82.35	92.53	97.22
7800	0.30	1.04	5.24	10.12	20.75	41.28	61.86	82.09	92.13	97.21
7900	0.30	1.04	5.26	10.14	20.78	41.30	61.84	81.93	92.23	97.92
8000	0.31	1.05	5.29	10.17	20.83	41.34	61.81	81.82	91.87	97.64

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 0°C

FREQUENCY (MHz)	Attenuation accuracy relative to nominal attenuation setting (dB)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	-0.05	-0.09	-0.25	-0.14	-0.09	0.40	0.80	1.26	2.01	2.31
5	-0.05	-0.09	-0.25	-0.13	-0.08	0.40	0.79	1.28	2.00	2.33
10	-0.05	-0.09	-0.25	-0.13	-0.08	0.40	0.79	1.26	1.70	2.37
20	-0.05	-0.09	-0.25	-0.13	-0.08	0.40	0.81	1.21	1.47	2.09
50	-0.05	-0.09	-0.24	-0.12	-0.07	0.42	0.83	1.27	1.72	2.00
100	-0.05	-0.09	-0.23	-0.10	-0.05	0.44	0.84	1.29	1.73	2.04
200	-0.04	-0.08	-0.19	-0.06	0.01	0.50	0.90	1.39	1.77	1.93
300	-0.04	-0.06	-0.15	-0.01	0.06	0.55	0.95	1.43	1.88	2.23
500	-0.03	-0.03	-0.04	0.14	0.22	0.71	1.10	1.59	1.91	2.44
700	-0.02	0.00	0.06	0.27	0.36	0.84	1.23	1.71	2.14	2.48
900	-0.01	0.02	0.12	0.35	0.44	0.92	1.29	1.78	2.20	2.20
1000	-0.01	0.02	0.13	0.36	0.45	0.92	1.29	1.73	2.24	2.19
1200	-0.01	0.02	0.12	0.36	0.45	0.91	1.26	1.68	1.99	2.28
1400	-0.01	0.01	0.10	0.35	0.43	0.88	1.21	1.62	2.07	2.32
1500	-0.01	0.01	0.10	0.34	0.43	0.87	1.19	1.58	2.12	2.14
1600	0.00	0.01	0.09	0.35	0.43	0.87	1.17	1.50	1.89	2.35
1800	0.00	0.01	0.09	0.35	0.44	0.86	1.14	1.47	1.78	1.96
2000	0.00	0.00	0.09	0.35	0.43	0.85	1.10	1.37	1.69	2.20
2100	0.00	0.00	0.08	0.35	0.42	0.82	1.06	1.36	1.69	1.99
2200	0.00	0.00	0.06	0.33	0.40	0.79	1.01	1.24	1.57	1.83
2400	0.00	-0.01	0.02	0.28	0.34	0.71	0.91	1.08	1.29	1.73
2500	-0.01	-0.02	0.00	0.25	0.30	0.66	0.83	0.96	1.22	1.49
2700	-0.01	-0.03	-0.06	0.18	0.21	0.55	0.67	0.77	0.94	1.15
2800	-0.01	-0.04	-0.08	0.15	0.16	0.49	0.60	0.68	0.83	0.77
3000	-0.02	-0.05	-0.12	0.10	0.09	0.40	0.47	0.46	0.50	0.66
3100	-0.02	-0.05	-0.13	0.09	0.07	0.36	0.42	0.36	0.51	0.91
3300	-0.02	-0.05	-0.13	0.08	0.03	0.30	0.32	0.15	0.27	0.63
3400	-0.02	-0.05	-0.13	0.09	0.03	0.28	0.26	0.08	0.25	0.34
3600	-0.03	-0.04	-0.12	0.10	0.01	0.24	0.17	-0.05	0.09	0.01
3700	-0.03	-0.03	-0.11	0.11	0.01	0.22	0.12	-0.17	0.00	0.04
3900	-0.02	-0.02	-0.09	0.13	0.00	0.18	0.02	-0.31	-0.57	0.01
4000	-0.02	-0.02	-0.09	0.14	-0.01	0.16	-0.04	-0.44	-0.47	-0.50
4200	-0.02	-0.01	-0.07	0.15	-0.02	0.11	-0.15	-0.63	-0.75	-1.03
4300	-0.02	-0.01	-0.07	0.15	-0.03	0.08	-0.23	-0.74	-0.78	-0.29
4500	-0.02	-0.01	-0.06	0.16	-0.06	0.01	-0.38	-1.01	-0.96	-0.81
4600	-0.02	-0.01	-0.06	0.16	-0.07	-0.03	-0.47	-1.07	-1.09	-1.22
4800	-0.02	-0.01	-0.07	0.15	-0.12	-0.13	-0.65	-1.32	-1.37	-1.42
4900	-0.02	-0.01	-0.07	0.14	-0.14	-0.18	-0.75	-1.53	-1.54	-1.44
5100	-0.02	-0.01	-0.07	0.13	-0.19	-0.28	-0.96	-1.68	-1.67	-1.56
5200	-0.02	-0.02	-0.08	0.13	-0.22	-0.34	-1.06	-1.84	-2.07	-1.76
5400	-0.02	-0.02	-0.08	0.11	-0.27	-0.45	-1.24	-1.99	-1.91	-2.34
5500	-0.02	-0.02	-0.09	0.10	-0.31	-0.51	-1.37	-2.12	-2.49	-2.67
5700	-0.03	-0.03	-0.11	0.06	-0.38	-0.65	-1.58	-2.40	-2.80	-2.20
5800	-0.03	-0.03	-0.13	0.03	-0.43	-0.72	-1.71	-2.49	-2.74	-2.53
6000	-0.04	-0.04	-0.18	-0.04	-0.54	-0.89	-1.93	-2.77	-3.35	-3.19
6100	-0.04	-0.05	-0.20	-0.09	-0.60	-0.96	-2.03	-2.93	-3.02	-3.52
6300	-0.06	-0.05	-0.24	-0.15	-0.68	-1.08	-2.16	-3.09	-3.16	-3.10
6400	-0.06	-0.05	-0.24	-0.15	-0.69	-1.10	-2.19	-3.22	-3.12	-3.09
6600	-0.06	-0.03	-0.19	-0.10	-0.63	-1.08	-2.17	-3.08	-3.54	-3.82
6700	-0.06	-0.02	-0.17	-0.08	-0.61	-1.07	-2.13	-3.03	-3.42	-3.76
6900	-0.06	-0.01	-0.15	-0.05	-0.58	-1.05	-2.08	-2.99	-3.25	-3.69
7000	-0.05	-0.01	-0.14	-0.04	-0.57	-1.06	-2.05	-2.86	-3.17	-3.78
7200	-0.05	-0.01	-0.17	-0.06	-0.61	-1.12	-2.02	-2.76	-2.97	-3.79
7300	-0.04	-0.02	-0.18	-0.08	-0.64	-1.15	-2.01	-2.65	-2.91	-3.08
7500	-0.04	-0.02	-0.21	-0.10	-0.69	-1.22	-1.98	-2.48	-2.70	-2.21
7600	-0.04	-0.03	-0.22	-0.11	-0.70	-1.24	-1.93	-2.35	-2.53	-2.22
7800	-0.05	-0.03	-0.24	-0.12	-0.75	-1.28	-1.86	-2.09	-2.13	-2.21
7900	-0.05	-0.04	-0.26	-0.14	-0.78	-1.30	-1.84	-1.93	-2.23	-2.92
8000	-0.06	-0.05	-0.28	-0.17	-0.83	-1.33	-1.81	-1.82	-1.87	-2.64

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 0°C

FREQUENCY (MHz)	Input VSWR (:1)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	1.61	1.50	1.31	1.13	1.07	1.03	1.09	1.16	1.16	1.17
5	1.61	1.50	1.31	1.13	1.07	1.02	1.09	1.16	1.15	1.17
10	1.61	1.50	1.30	1.13	1.07	1.02	1.09	1.16	1.15	1.17
20	1.61	1.50	1.30	1.12	1.07	1.01	1.08	1.15	1.15	1.16
50	1.61	1.49	1.30	1.13	1.07	1.01	1.08	1.15	1.15	1.16
100	1.60	1.49	1.31	1.13	1.07	1.01	1.07	1.14	1.14	1.15
200	1.56	1.46	1.30	1.13	1.08	1.00	1.07	1.14	1.13	1.14
300	1.50	1.41	1.27	1.12	1.07	1.01	1.07	1.14	1.13	1.15
500	1.35	1.28	1.21	1.10	1.07	1.01	1.08	1.14	1.14	1.15
700	1.21	1.16	1.15	1.08	1.07	1.01	1.07	1.14	1.14	1.15
900	1.08	1.06	1.12	1.07	1.06	1.01	1.07	1.14	1.14	1.15
1000	1.04	1.05	1.12	1.07	1.06	1.01	1.07	1.14	1.14	1.15
1200	1.06	1.09	1.13	1.07	1.07	1.00	1.07	1.14	1.14	1.15
1400	1.11	1.13	1.14	1.08	1.07	1.00	1.06	1.14	1.14	1.15
1500	1.12	1.15	1.14	1.08	1.08	1.00	1.06	1.13	1.14	1.14
1600	1.13	1.15	1.14	1.08	1.08	1.01	1.06	1.13	1.14	1.14
1800	1.11	1.13	1.13	1.08	1.09	1.01	1.05	1.13	1.13	1.14
2000	1.07	1.09	1.11	1.07	1.09	1.01	1.05	1.12	1.13	1.13
2100	1.06	1.08	1.10	1.07	1.09	1.01	1.05	1.12	1.13	1.13
2200	1.07	1.08	1.10	1.07	1.09	1.02	1.04	1.12	1.13	1.13
2400	1.14	1.12	1.12	1.08	1.09	1.02	1.04	1.12	1.13	1.13
2500	1.19	1.16	1.14	1.09	1.10	1.02	1.04	1.12	1.13	1.13
2700	1.27	1.23	1.18	1.11	1.10	1.02	1.04	1.12	1.13	1.13
2800	1.31	1.26	1.21	1.11	1.10	1.02	1.03	1.11	1.13	1.13
3000	1.37	1.31	1.24	1.13	1.11	1.03	1.03	1.11	1.13	1.12
3100	1.38	1.33	1.26	1.14	1.12	1.03	1.02	1.11	1.13	1.12
3300	1.38	1.33	1.27	1.15	1.13	1.04	1.02	1.11	1.12	1.12
3400	1.37	1.33	1.28	1.16	1.14	1.04	1.01	1.10	1.12	1.11
3600	1.33	1.30	1.28	1.17	1.15	1.05	1.01	1.09	1.12	1.11
3700	1.30	1.28	1.27	1.17	1.16	1.06	1.01	1.09	1.11	1.10
3900	1.22	1.22	1.25	1.16	1.17	1.07	1.02	1.09	1.11	1.10
4000	1.18	1.19	1.24	1.16	1.17	1.08	1.03	1.09	1.11	1.09
4200	1.12	1.15	1.21	1.15	1.19	1.09	1.04	1.09	1.10	1.09
4300	1.11	1.14	1.20	1.15	1.19	1.09	1.05	1.09	1.10	1.09
4500	1.14	1.16	1.19	1.14	1.19	1.11	1.07	1.10	1.11	1.10
4600	1.16	1.17	1.18	1.14	1.19	1.11	1.08	1.11	1.11	1.11
4800	1.21	1.21	1.18	1.14	1.20	1.13	1.10	1.12	1.12	1.12
4900	1.22	1.21	1.17	1.14	1.19	1.14	1.11	1.14	1.14	1.13
5100	1.21	1.20	1.16	1.14	1.19	1.16	1.14	1.17	1.16	1.17
5200	1.19	1.18	1.15	1.13	1.18	1.17	1.15	1.19	1.18	1.18
5400	1.16	1.15	1.13	1.13	1.18	1.20	1.18	1.23	1.22	1.22
5500	1.15	1.14	1.13	1.13	1.18	1.22	1.20	1.25	1.25	1.25
5700	1.16	1.14	1.14	1.13	1.19	1.26	1.25	1.31	1.31	1.31
5800	1.16	1.15	1.15	1.14	1.19	1.28	1.27	1.35	1.34	1.34
6000	1.15	1.15	1.15	1.16	1.21	1.33	1.32	1.42	1.41	1.41
6100	1.12	1.13	1.14	1.17	1.22	1.35	1.34	1.45	1.46	1.45
6300	1.07	1.09	1.14	1.20	1.26	1.40	1.40	1.53	1.54	1.53
6400	1.09	1.11	1.15	1.23	1.27	1.43	1.43	1.58	1.59	1.57
6600	1.25	1.24	1.21	1.29	1.31	1.48	1.49	1.68	1.70	1.67
6700	1.29	1.28	1.24	1.32	1.32	1.50	1.51	1.70	1.73	1.70
6900	1.38	1.36	1.30	1.37	1.35	1.54	1.55	1.78	1.81	1.77
7000	1.41	1.39	1.34	1.40	1.36	1.55	1.57	1.81	1.85	1.81
7200	1.44	1.42	1.40	1.45	1.38	1.58	1.60	1.88	1.93	1.87
7300	1.45	1.44	1.44	1.47	1.40	1.58	1.62	1.90	1.96	1.90
7500	1.51	1.51	1.53	1.54	1.44	1.60	1.64	1.95	2.01	1.94
7600	1.56	1.56	1.59	1.57	1.46	1.61	1.64	1.96	2.04	1.96
7800	1.69	1.70	1.72	1.66	1.53	1.61	1.65	1.99	2.07	1.99
7900	1.76	1.77	1.78	1.71	1.56	1.62	1.66	2.00	2.08	1.99
8000	1.82	1.83	1.85	1.76	1.60	1.62	1.66	2.00	2.09	2.00

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 0°C

FREQUENCY (MHz)	Output VSWR (:1)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	1.61	1.56	1.24	1.14	1.05	1.13	1.07	1.10	1.13	1.14
5	1.61	1.56	1.24	1.14	1.05	1.13	1.07	1.10	1.12	1.13
10	1.61	1.56	1.24	1.14	1.04	1.13	1.06	1.10	1.12	1.13
20	1.61	1.56	1.24	1.14	1.04	1.12	1.06	1.09	1.12	1.13
50	1.61	1.56	1.24	1.14	1.04	1.12	1.06	1.09	1.11	1.12
100	1.61	1.56	1.25	1.15	1.03	1.11	1.05	1.08	1.11	1.11
200	1.56	1.52	1.23	1.15	1.02	1.10	1.04	1.08	1.10	1.11
300	1.50	1.47	1.21	1.13	1.03	1.11	1.05	1.08	1.11	1.12
500	1.38	1.36	1.17	1.13	1.02	1.10	1.05	1.08	1.10	1.11
700	1.24	1.24	1.13	1.12	1.02	1.10	1.05	1.08	1.10	1.11
900	1.12	1.14	1.13	1.14	1.02	1.09	1.05	1.08	1.10	1.10
1000	1.08	1.10	1.14	1.15	1.02	1.09	1.05	1.07	1.09	1.10
1200	1.10	1.11	1.18	1.18	1.03	1.08	1.05	1.07	1.09	1.09
1400	1.17	1.16	1.22	1.21	1.04	1.07	1.05	1.07	1.08	1.08
1500	1.18	1.17	1.23	1.22	1.05	1.07	1.05	1.06	1.08	1.08
1600	1.19	1.18	1.24	1.23	1.06	1.07	1.05	1.06	1.07	1.08
1800	1.16	1.15	1.23	1.23	1.06	1.06	1.05	1.06	1.07	1.07
2000	1.09	1.08	1.20	1.22	1.07	1.06	1.05	1.06	1.06	1.06
2100	1.06	1.06	1.19	1.22	1.07	1.06	1.05	1.06	1.06	1.06
2200	1.06	1.06	1.18	1.21	1.07	1.06	1.05	1.06	1.06	1.06
2400	1.14	1.14	1.18	1.21	1.08	1.06	1.06	1.06	1.07	1.06
2500	1.20	1.19	1.19	1.21	1.08	1.06	1.06	1.06	1.07	1.06
2700	1.32	1.31	1.23	1.22	1.09	1.06	1.06	1.07	1.07	1.06
2800	1.38	1.36	1.25	1.23	1.09	1.06	1.07	1.07	1.07	1.06
3000	1.47	1.45	1.29	1.24	1.10	1.06	1.07	1.07	1.07	1.06
3100	1.50	1.48	1.30	1.24	1.10	1.05	1.07	1.07	1.06	1.05
3300	1.51	1.49	1.30	1.25	1.10	1.05	1.06	1.06	1.06	1.05
3400	1.49	1.48	1.30	1.24	1.09	1.04	1.06	1.06	1.05	1.04
3600	1.42	1.43	1.27	1.23	1.09	1.04	1.05	1.05	1.05	1.03
3700	1.37	1.39	1.25	1.23	1.08	1.03	1.04	1.04	1.04	1.03
3900	1.28	1.30	1.22	1.22	1.08	1.02	1.02	1.03	1.03	1.02
4000	1.23	1.26	1.21	1.21	1.07	1.01	1.02	1.02	1.02	1.01
4200	1.17	1.20	1.20	1.21	1.07	1.01	1.01	1.02	1.02	1.01
4300	1.15	1.17	1.19	1.22	1.07	1.01	1.01	1.02	1.02	1.01
4500	1.15	1.15	1.21	1.22	1.07	1.02	1.03	1.03	1.02	1.03
4600	1.15	1.15	1.21	1.23	1.07	1.03	1.05	1.05	1.03	1.04
4800	1.15	1.14	1.21	1.22	1.07	1.05	1.08	1.07	1.06	1.06
4900	1.15	1.13	1.21	1.21	1.07	1.06	1.09	1.09	1.07	1.07
5100	1.12	1.10	1.18	1.19	1.05	1.09	1.13	1.12	1.10	1.10
5200	1.10	1.09	1.17	1.17	1.04	1.10	1.15	1.14	1.12	1.11
5400	1.08	1.08	1.13	1.13	1.04	1.13	1.19	1.17	1.15	1.14
5500	1.07	1.07	1.11	1.10	1.04	1.15	1.21	1.20	1.17	1.16
5700	1.07	1.07	1.07	1.07	1.07	1.19	1.25	1.24	1.21	1.20
5800	1.06	1.07	1.06	1.06	1.10	1.21	1.28	1.26	1.24	1.22
6000	1.04	1.04	1.09	1.10	1.17	1.26	1.33	1.32	1.30	1.27
6100	1.06	1.05	1.13	1.14	1.21	1.28	1.36	1.34	1.32	1.30
6300	1.19	1.17	1.23	1.23	1.28	1.32	1.40	1.39	1.37	1.34
6400	1.28	1.25	1.29	1.28	1.32	1.35	1.42	1.41	1.40	1.36
6600	1.49	1.46	1.45	1.40	1.41	1.40	1.46	1.46	1.46	1.41
6700	1.54	1.51	1.48	1.43	1.44	1.42	1.47	1.47	1.47	1.43
6900	1.62	1.60	1.57	1.50	1.49	1.45	1.49	1.50	1.51	1.46
7000	1.64	1.63	1.59	1.53	1.52	1.47	1.49	1.51	1.53	1.48
7200	1.63	1.64	1.62	1.57	1.55	1.49	1.49	1.52	1.56	1.50
7300	1.62	1.64	1.62	1.58	1.56	1.50	1.48	1.52	1.56	1.51
7500	1.65	1.67	1.62	1.60	1.57	1.51	1.46	1.51	1.57	1.52
7600	1.68	1.70	1.63	1.61	1.57	1.52	1.45	1.51	1.57	1.52
7800	1.74	1.74	1.64	1.62	1.56	1.51	1.41	1.48	1.56	1.51
7900	1.74	1.74	1.63	1.62	1.55	1.50	1.39	1.46	1.55	1.50
8000	1.71	1.71	1.62	1.62	1.55	1.49	1.36	1.45	1.54	1.49

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 0°C

FREQUENCY (MHz)	I. Loss (dB)	Cross-Over Isolation (dB)			
		In1-In2	In1-out2	Out1-In2	Out1-Out2
1	2.59	108.07	106.83	108.29	112.87
5	2.60	106.93	106.42	111.24	112.25
10	2.60	113.69	114.81	118.66	118.31
20	2.61	128.37	129.46	125.36	125.28
50	2.65	123.47	126.02	128.68	124.07
100	2.73	127.99	123.84	125.35	121.56
200	2.86	127.15	123.08	126.93	126.45
300	2.98	130.85	124.71	123.50	131.09
500	3.26	124.93	126.51	129.40	126.54
700	3.52	126.45	124.02	124.76	122.82
900	3.72	122.91	122.49	120.82	127.40
1000	3.80	120.73	124.10	122.46	123.30
1200	3.91	126.28	125.18	124.08	123.11
1400	4.03	124.99	126.05	124.75	123.96
1500	4.10	125.12	125.47	124.20	124.15
1600	4.17	124.48	125.79	123.59	127.64
1800	4.32	125.32	125.78	128.91	122.43
2000	4.46	122.98	125.64	124.08	129.41
2100	4.53	126.81	122.89	127.60	124.05
2200	4.59	127.63	122.67	123.49	121.47
2400	4.69	125.10	124.25	124.69	121.64
2500	4.73	123.39	125.96	122.09	125.99
2700	4.81	123.07	122.50	124.54	122.93
2800	4.86	121.40	121.78	125.83	121.89
3000	4.97	124.61	120.11	123.80	128.79
3100	5.04	119.71	122.42	124.53	121.70
3300	5.20	122.30	129.48	126.90	122.62
3400	5.29	125.66	123.84	128.01	127.30
3600	5.48	123.19	122.43	127.96	123.89
3700	5.58	124.37	126.16	125.90	123.59
3900	5.77	124.46	124.07	125.28	125.03
4000	5.87	123.09	121.47	123.73	123.38
4200	6.07	125.54	124.36	124.83	125.61
4300	6.16	121.52	123.69	124.51	123.99
4500	6.34	120.22	126.10	121.36	122.37
4600	6.43	124.36	122.61	122.57	122.82
4800	6.59	120.35	124.10	125.19	121.58
4900	6.66	127.15	121.74	121.48	121.86
5100	6.81	123.65	122.73	121.14	124.16
5200	6.89	127.94	122.11	120.16	129.88
5400	7.03	122.05	122.25	122.27	120.60
5500	7.09	122.59	124.24	121.35	125.60
5700	7.22	120.79	121.34	120.90	123.18
5800	7.27	127.07	122.87	123.73	121.80
6000	7.37	126.16	123.35	121.02	122.47
6100	7.42	124.68	123.08	120.26	125.79
6300	7.57	122.50	128.51	120.26	117.50
6400	7.68	118.73	122.73	118.82	122.77
6600	8.04	122.60	123.76	122.92	119.67
6700	8.15	124.92	123.46	121.30	119.04
6900	8.43	122.79	119.57	119.32	118.81
7000	8.57	122.36	120.50	119.30	118.91
7200	8.82	121.69	119.66	119.98	121.39
7300	8.94	120.69	119.81	119.23	120.02
7500	9.20	117.34	119.85	116.73	113.92
7600	9.35	113.01	117.89	112.07	112.38
7800	9.66	101.37	106.29	104.76	104.00
7900	9.82	96.47	102.42	100.60	100.00
8000	9.96	93.57	99.66	97.59	97.82

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
 RC4DAT-8G-95
 190526
 Page 5 of 18

Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 0°C

FREQUENCY (MHz)	IP3 (dBm)
1	43.83
5	51.26
10	50.38
50	53.66
100	51.62
200	53.01
300	52.76
400	53.62
500	54.05
600	53.78
700	53.10
750	52.60
800	52.10
900	51.41
1000	53.10
1500	53.33
2000	52.88
2500	53.91
3000	54.14
3500	55.27
4000	50.05
4500	47.59
5000	53.15
5500	48.70
6000	48.01
6500	47.30
7000	48.39
7500	51.60
8000	48.26

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 25°C

FREQUENCY (MHz)	Attenuation relative to Insertion Loss (dB)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	0.29	1.08	5.21	10.05	19.96	39.41	59.01	78.39	87.60	92.27
5	0.29	1.08	5.21	10.05	19.96	39.41	59.00	78.42	87.83	92.60
10	0.29	1.08	5.20	10.05	19.96	39.41	59.00	78.41	87.87	92.66
20	0.29	1.08	5.20	10.05	19.96	39.41	59.00	78.55	88.12	92.66
50	0.29	1.08	5.20	10.04	19.95	39.40	58.99	78.51	87.99	92.84
100	0.29	1.08	5.19	10.04	19.94	39.39	58.99	78.50	88.13	92.74
200	0.29	1.06	5.16	9.99	19.89	39.33	58.93	78.46	88.04	92.70
300	0.28	1.05	5.11	9.92	19.81	39.25	58.85	78.39	88.04	92.67
500	0.27	1.01	4.99	9.77	19.64	39.07	58.68	78.19	87.81	92.58
700	0.26	0.98	4.89	9.64	19.49	38.92	58.53	78.06	87.67	92.32
900	0.26	0.97	4.84	9.57	19.41	38.84	58.47	77.99	87.65	92.25
1000	0.26	0.97	4.84	9.56	19.40	38.84	58.47	78.01	87.68	92.20
1200	0.25	0.98	4.86	9.58	19.42	38.85	58.49	78.05	87.64	92.38
1400	0.25	0.98	4.88	9.60	19.44	38.89	58.54	78.11	87.74	92.55
1500	0.25	0.99	4.89	9.60	19.44	38.90	58.56	78.21	87.81	92.44
1600	0.25	0.99	4.89	9.60	19.44	38.90	58.57	78.19	87.81	92.32
1800	0.25	0.99	4.89	9.58	19.43	38.91	58.61	78.19	87.73	92.68
2000	0.25	0.99	4.89	9.58	19.44	38.93	58.66	78.35	87.92	92.52
2100	0.25	0.99	4.90	9.59	19.45	38.95	58.70	78.46	88.11	92.96
2200	0.25	1.00	4.91	9.60	19.48	38.98	58.75	78.53	88.26	92.87
2400	0.25	1.01	4.95	9.65	19.54	39.07	58.88	78.68	88.29	93.11
2500	0.25	1.01	4.97	9.67	19.58	39.12	58.95	78.77	88.63	93.18
2700	0.26	1.02	5.01	9.73	19.65	39.21	59.09	78.97	88.51	93.64
2800	0.26	1.02	5.03	9.75	19.69	39.26	59.15	79.03	88.90	93.63
3000	0.26	1.03	5.07	9.80	19.76	39.36	59.29	79.31	89.15	94.14
3100	0.27	1.04	5.08	9.82	19.80	39.41	59.38	79.46	89.26	94.28
3300	0.27	1.04	5.10	9.85	19.85	39.49	59.52	79.66	89.48	94.17
3400	0.27	1.04	5.11	9.85	19.87	39.53	59.58	79.74	89.51	94.34
3600	0.27	1.03	5.09	9.84	19.89	39.58	59.70	79.96	90.06	94.79
3700	0.27	1.03	5.08	9.83	19.89	39.59	59.76	80.06	90.24	95.04
3900	0.27	1.01	5.05	9.79	19.86	39.60	59.84	80.19	90.24	95.19
4000	0.27	1.00	5.03	9.77	19.85	39.60	59.88	80.28	90.47	94.86
4200	0.27	0.99	5.01	9.73	19.82	39.62	59.96	80.36	90.53	95.53
4300	0.27	0.99	5.01	9.73	19.83	39.64	60.01	80.54	90.85	95.38
4500	0.26	0.99	5.03	9.74	19.87	39.71	60.18	80.87	90.98	96.09
4600	0.27	1.00	5.04	9.76	19.90	39.76	60.27	81.05	90.87	96.42
4800	0.27	1.01	5.06	9.78	19.97	39.86	60.46	81.16	91.37	95.86
4900	0.27	1.01	5.06	9.79	20.00	39.91	60.55	81.36	91.32	95.92
5100	0.27	1.01	5.05	9.81	20.07	40.01	60.76	81.61	92.01	97.00
5200	0.27	1.01	5.05	9.83	20.11	40.08	60.87	81.80	91.90	96.14
5400	0.27	1.01	5.06	9.86	20.19	40.23	61.13	82.00	92.13	97.18
5500	0.27	1.01	5.06	9.88	20.23	40.31	61.26	82.20	92.37	96.79
5700	0.27	1.02	5.09	9.92	20.30	40.46	61.52	82.44	92.47	97.80
5800	0.27	1.02	5.10	9.94	20.35	40.54	61.64	82.64	93.00	97.56
6000	0.28	1.03	5.16	10.03	20.47	40.73	61.88	82.84	92.87	98.59
6100	0.29	1.04	5.19	10.08	20.54	40.82	62.01	82.97	93.17	97.85
6300	0.30	1.05	5.23	10.14	20.62	40.94	62.21	83.22	93.65	98.66
6400	0.31	1.05	5.23	10.14	20.62	40.96	62.23	83.24	93.65	98.04
6600	0.31	1.02	5.16	10.05	20.53	40.90	62.19	83.24	93.85	98.56
6700	0.31	1.01	5.14	10.03	20.50	40.88	62.17	83.21	93.72	98.72
6900	0.30	1.00	5.11	9.99	20.46	40.85	62.08	83.17	93.49	99.07
7000	0.30	1.00	5.11	9.98	20.46	40.86	62.07	83.08	93.44	98.77
7200	0.29	1.01	5.14	10.01	20.49	40.91	62.06	83.02	93.15	98.69
7300	0.29	1.01	5.16	10.03	20.52	40.94	62.08	82.97	93.24	98.47
7500	0.29	1.02	5.19	10.05	20.57	41.00	62.05	82.93	93.01	97.66
7600	0.29	1.03	5.20	10.06	20.59	41.02	62.02	82.87	93.02	97.34
7800	0.29	1.03	5.22	10.07	20.63	41.05	61.94	82.53	92.86	97.10
7900	0.30	1.04	5.24	10.09	20.67	41.07	61.91	82.45	92.84	97.34
8000	0.30	1.05	5.27	10.12	20.71	41.11	61.89	82.31	92.58	96.88

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 25°C

FREQUENCY (MHz)	Attenuation accuracy relative to nominal attenuation setting (dB)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	-0.04	-0.08	-0.21	-0.05	0.04	0.59	0.99	1.61	2.40	2.74
5	-0.04	-0.08	-0.20	-0.05	0.04	0.60	1.01	1.58	2.17	2.40
10	-0.04	-0.08	-0.20	-0.05	0.04	0.59	1.00	1.59	2.13	2.34
20	-0.04	-0.08	-0.20	-0.05	0.04	0.59	1.00	1.45	1.88	2.34
50	-0.04	-0.08	-0.20	-0.04	0.05	0.60	1.01	1.49	2.01	2.16
100	-0.04	-0.08	-0.19	-0.04	0.06	0.61	1.01	1.50	1.87	2.26
200	-0.04	-0.06	-0.16	0.01	0.11	0.67	1.07	1.54	1.96	2.30
300	-0.03	-0.05	-0.11	0.08	0.19	0.75	1.15	1.61	1.96	2.33
500	-0.02	-0.01	0.01	0.23	0.36	0.93	1.33	1.81	2.20	2.42
700	-0.01	0.02	0.11	0.36	0.51	1.08	1.47	1.94	2.33	2.68
900	-0.01	0.03	0.16	0.43	0.59	1.16	1.53	2.01	2.35	2.75
1000	-0.01	0.03	0.16	0.44	0.60	1.16	1.53	1.99	2.32	2.80
1200	0.00	0.02	0.14	0.42	0.58	1.15	1.51	1.95	2.36	2.62
1400	0.00	0.02	0.12	0.40	0.56	1.11	1.46	1.89	2.26	2.46
1500	0.00	0.01	0.11	0.40	0.56	1.11	1.44	1.79	2.19	2.57
1600	0.00	0.01	0.11	0.40	0.56	1.10	1.43	1.81	2.19	2.68
1800	0.00	0.01	0.11	0.42	0.57	1.10	1.39	1.82	2.27	2.32
2000	0.00	0.01	0.11	0.42	0.56	1.07	1.34	1.65	2.08	2.48
2100	0.00	0.01	0.10	0.41	0.55	1.05	1.30	1.54	1.89	2.04
2200	0.00	0.00	0.09	0.40	0.52	1.02	1.25	1.47	1.74	2.13
2400	0.00	0.00	0.05	0.35	0.46	0.93	1.13	1.32	1.71	1.89
2500	0.00	-0.01	0.03	0.33	0.42	0.88	1.06	1.23	1.37	1.82
2700	0.00	-0.02	-0.01	0.27	0.35	0.79	0.91	1.03	1.49	1.36
2800	-0.01	-0.02	-0.03	0.25	0.31	0.74	0.85	0.97	1.10	1.37
3000	-0.01	-0.03	-0.07	0.20	0.24	0.64	0.71	0.69	0.85	0.86
3100	-0.01	-0.03	-0.08	0.19	0.20	0.59	0.62	0.54	0.74	0.72
3300	-0.02	-0.04	-0.10	0.15	0.15	0.51	0.48	0.34	0.52	0.83
3400	-0.02	-0.04	-0.11	0.15	0.13	0.47	0.42	0.26	0.49	0.66
3600	-0.02	-0.03	-0.09	0.16	0.11	0.42	0.30	0.04	-0.06	0.21
3700	-0.02	-0.03	-0.08	0.17	0.11	0.41	0.24	-0.06	-0.24	-0.04
3900	-0.02	-0.01	-0.05	0.21	0.14	0.40	0.16	-0.19	-0.24	-0.19
4000	-0.02	0.00	-0.03	0.23	0.16	0.40	0.12	-0.28	-0.47	0.14
4200	-0.02	0.01	-0.01	0.27	0.18	0.38	0.04	-0.36	-0.53	-0.53
4300	-0.01	0.01	-0.01	0.27	0.17	0.36	-0.01	-0.54	-0.85	-0.38
4500	-0.01	0.01	-0.03	0.26	0.13	0.29	-0.18	-0.87	-0.97	-1.09
4600	-0.01	0.00	-0.04	0.24	0.10	0.24	-0.27	-1.05	-0.87	-1.42
4800	-0.02	-0.01	-0.06	0.22	0.03	0.14	-0.46	-1.16	-1.37	-0.86
4900	-0.02	-0.01	-0.06	0.21	0.00	0.10	-0.55	-1.36	-1.32	-0.92
5100	-0.02	-0.01	-0.05	0.19	-0.07	-0.01	-0.76	-1.61	-2.00	-2.00
5200	-0.02	-0.01	-0.05	0.17	-0.11	-0.08	-0.87	-1.80	-1.89	-1.14
5400	-0.02	-0.01	-0.06	0.14	-0.19	-0.23	-1.13	-2.00	-2.13	-2.18
5500	-0.02	-0.01	-0.06	0.12	-0.23	-0.31	-1.26	-2.20	-2.37	-1.79
5700	-0.02	-0.02	-0.09	0.08	-0.30	-0.46	-1.52	-2.44	-2.47	-2.79
5800	-0.02	-0.02	-0.10	0.06	-0.35	-0.54	-1.64	-2.64	-3.00	-2.56
6000	-0.03	-0.03	-0.16	-0.02	-0.47	-0.73	-1.88	-2.84	-2.87	-3.59
6100	-0.04	-0.04	-0.19	-0.07	-0.53	-0.81	-2.01	-2.97	-3.17	-2.85
6300	-0.05	-0.05	-0.23	-0.14	-0.62	-0.94	-2.21	-3.22	-3.65	-3.66
6400	-0.06	-0.05	-0.22	-0.14	-0.62	-0.96	-2.23	-3.24	-3.65	-3.04
6600	-0.06	-0.02	-0.16	-0.05	-0.53	-0.90	-2.19	-3.24	-3.85	-3.56
6700	-0.06	-0.01	-0.14	-0.03	-0.50	-0.88	-2.17	-3.21	-3.71	-3.72
6900	-0.05	0.00	-0.11	0.01	-0.46	-0.85	-2.08	-3.17	-3.49	-4.07
7000	-0.05	0.00	-0.11	0.02	-0.46	-0.86	-2.07	-3.08	-3.44	-3.77
7200	-0.04	-0.01	-0.14	-0.01	-0.49	-0.91	-2.06	-3.02	-3.15	-3.69
7300	-0.04	-0.01	-0.16	-0.03	-0.52	-0.94	-2.08	-2.97	-3.24	-3.46
7500	-0.04	-0.02	-0.19	-0.05	-0.57	-1.00	-2.05	-2.93	-3.01	-2.66
7600	-0.04	-0.03	-0.20	-0.06	-0.59	-1.02	-2.02	-2.87	-3.02	-2.34
7800	-0.04	-0.03	-0.22	-0.07	-0.63	-1.05	-1.94	-2.53	-2.86	-2.10
7900	-0.05	-0.04	-0.24	-0.09	-0.67	-1.07	-1.91	-2.45	-2.84	-2.34
8000	-0.05	-0.05	-0.27	-0.12	-0.71	-1.11	-1.89	-2.31	-2.58	-1.88

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 25°C

FREQUENCY (MHz)	Input VSWR (:1)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	1.66	1.54	1.36	1.18	1.12	1.05	1.04	1.11	1.10	1.12
5	1.66	1.54	1.36	1.18	1.12	1.04	1.04	1.10	1.10	1.11
10	1.65	1.54	1.36	1.18	1.12	1.04	1.04	1.10	1.10	1.11
20	1.65	1.54	1.36	1.18	1.12	1.04	1.03	1.10	1.10	1.11
50	1.65	1.54	1.36	1.18	1.12	1.04	1.03	1.10	1.10	1.11
100	1.64	1.53	1.35	1.17	1.12	1.04	1.03	1.10	1.09	1.11
200	1.58	1.48	1.33	1.17	1.11	1.04	1.03	1.10	1.09	1.11
300	1.51	1.43	1.30	1.16	1.11	1.04	1.03	1.10	1.09	1.11
500	1.36	1.30	1.23	1.13	1.10	1.03	1.04	1.10	1.10	1.11
700	1.21	1.17	1.17	1.10	1.09	1.03	1.04	1.10	1.10	1.11
900	1.09	1.07	1.12	1.08	1.08	1.02	1.04	1.11	1.11	1.12
1000	1.04	1.04	1.11	1.07	1.07	1.02	1.04	1.11	1.11	1.12
1200	1.04	1.07	1.10	1.06	1.07	1.02	1.05	1.11	1.12	1.12
1400	1.09	1.11	1.11	1.06	1.07	1.03	1.05	1.12	1.12	1.13
1500	1.11	1.13	1.11	1.07	1.07	1.04	1.06	1.12	1.12	1.13
1600	1.12	1.14	1.12	1.07	1.08	1.04	1.06	1.12	1.13	1.13
1800	1.12	1.14	1.12	1.08	1.09	1.06	1.06	1.12	1.13	1.13
2000	1.09	1.11	1.11	1.09	1.11	1.07	1.07	1.12	1.13	1.13
2100	1.08	1.10	1.12	1.10	1.12	1.08	1.07	1.11	1.13	1.13
2200	1.08	1.10	1.12	1.11	1.14	1.09	1.08	1.11	1.13	1.12
2400	1.15	1.14	1.17	1.14	1.16	1.11	1.08	1.11	1.13	1.12
2500	1.21	1.19	1.20	1.16	1.17	1.12	1.09	1.10	1.13	1.11
2700	1.33	1.30	1.27	1.20	1.20	1.13	1.09	1.09	1.12	1.10
2800	1.39	1.35	1.31	1.22	1.21	1.14	1.10	1.09	1.11	1.09
3000	1.49	1.44	1.37	1.26	1.24	1.16	1.10	1.07	1.10	1.08
3100	1.51	1.46	1.39	1.27	1.25	1.16	1.11	1.07	1.09	1.07
3300	1.51	1.47	1.41	1.29	1.27	1.17	1.12	1.06	1.07	1.05
3400	1.49	1.45	1.41	1.29	1.27	1.18	1.12	1.05	1.06	1.05
3600	1.40	1.39	1.39	1.28	1.28	1.19	1.14	1.06	1.05	1.05
3700	1.35	1.35	1.37	1.28	1.29	1.20	1.15	1.07	1.05	1.06
3900	1.25	1.27	1.32	1.26	1.29	1.21	1.17	1.09	1.06	1.08
4000	1.22	1.24	1.30	1.25	1.29	1.22	1.18	1.11	1.07	1.10
4200	1.20	1.22	1.27	1.25	1.30	1.24	1.21	1.15	1.11	1.14
4300	1.22	1.24	1.26	1.25	1.30	1.25	1.22	1.17	1.13	1.16
4500	1.29	1.28	1.27	1.26	1.31	1.27	1.25	1.21	1.18	1.21
4600	1.32	1.31	1.27	1.27	1.31	1.29	1.27	1.24	1.20	1.23
4800	1.35	1.33	1.29	1.29	1.32	1.31	1.30	1.29	1.25	1.28
4900	1.35	1.33	1.29	1.30	1.33	1.33	1.32	1.31	1.28	1.30
5100	1.33	1.31	1.29	1.31	1.33	1.36	1.35	1.36	1.33	1.35
5200	1.31	1.30	1.29	1.31	1.33	1.37	1.37	1.38	1.35	1.38
5400	1.28	1.28	1.29	1.31	1.33	1.39	1.39	1.43	1.40	1.42
5500	1.29	1.28	1.29	1.31	1.33	1.41	1.41	1.45	1.43	1.44
5700	1.30	1.29	1.29	1.31	1.33	1.43	1.43	1.50	1.49	1.50
5800	1.29	1.29	1.29	1.31	1.33	1.44	1.44	1.53	1.52	1.52
6000	1.24	1.26	1.27	1.31	1.34	1.47	1.47	1.58	1.58	1.58
6100	1.21	1.23	1.25	1.31	1.34	1.48	1.48	1.60	1.61	1.60
6300	1.19	1.21	1.25	1.33	1.36	1.51	1.52	1.66	1.68	1.66
6400	1.23	1.23	1.26	1.35	1.37	1.52	1.53	1.69	1.71	1.69
6600	1.37	1.35	1.32	1.39	1.39	1.55	1.56	1.75	1.78	1.74
6700	1.41	1.38	1.35	1.41	1.40	1.56	1.57	1.76	1.80	1.76
6900	1.47	1.45	1.40	1.45	1.42	1.58	1.59	1.81	1.86	1.80
7000	1.49	1.47	1.43	1.47	1.43	1.58	1.60	1.83	1.88	1.82
7200	1.50	1.49	1.48	1.50	1.45	1.60	1.62	1.86	1.92	1.86
7300	1.51	1.50	1.51	1.52	1.46	1.60	1.63	1.88	1.95	1.87
7500	1.56	1.56	1.58	1.57	1.49	1.61	1.63	1.90	1.98	1.90
7600	1.61	1.61	1.63	1.60	1.52	1.61	1.64	1.91	1.99	1.91
7800	1.72	1.73	1.74	1.67	1.57	1.62	1.64	1.92	2.01	1.92
7900	1.77	1.79	1.80	1.71	1.60	1.62	1.64	1.92	2.02	1.92
8000	1.82	1.84	1.85	1.75	1.63	1.62	1.64	1.92	2.02	1.92

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 25°C

FREQUENCY (MHz)	Output VSWR (:1)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	1.66	1.61	1.29	1.19	1.02	1.08	1.02	1.05	1.08	1.09
5	1.66	1.61	1.29	1.19	1.02	1.08	1.02	1.05	1.08	1.09
10	1.65	1.61	1.29	1.19	1.01	1.08	1.02	1.05	1.07	1.08
20	1.65	1.61	1.29	1.19	1.01	1.08	1.01	1.05	1.07	1.08
50	1.65	1.60	1.29	1.19	1.01	1.08	1.01	1.04	1.07	1.08
100	1.64	1.59	1.29	1.19	1.01	1.07	1.01	1.04	1.07	1.08
200	1.60	1.56	1.27	1.18	1.01	1.07	1.01	1.04	1.07	1.08
300	1.55	1.51	1.26	1.18	1.02	1.07	1.02	1.04	1.06	1.07
500	1.41	1.40	1.21	1.17	1.03	1.06	1.03	1.04	1.06	1.07
700	1.26	1.26	1.17	1.16	1.04	1.06	1.04	1.04	1.05	1.06
900	1.12	1.15	1.15	1.17	1.05	1.05	1.04	1.04	1.05	1.06
1000	1.08	1.11	1.15	1.17	1.05	1.05	1.05	1.04	1.05	1.05
1200	1.12	1.13	1.19	1.19	1.06	1.04	1.06	1.05	1.05	1.05
1400	1.19	1.17	1.22	1.22	1.07	1.04	1.06	1.05	1.04	1.04
1500	1.20	1.18	1.22	1.22	1.07	1.04	1.06	1.05	1.04	1.04
1600	1.20	1.18	1.23	1.23	1.07	1.04	1.06	1.05	1.04	1.04
1800	1.16	1.14	1.21	1.22	1.08	1.03	1.07	1.05	1.04	1.04
2000	1.08	1.08	1.19	1.22	1.08	1.03	1.07	1.06	1.05	1.04
2100	1.06	1.06	1.18	1.22	1.09	1.04	1.07	1.06	1.05	1.04
2200	1.08	1.08	1.18	1.22	1.09	1.04	1.07	1.06	1.05	1.04
2400	1.17	1.17	1.20	1.22	1.10	1.04	1.08	1.06	1.05	1.04
2500	1.23	1.22	1.22	1.23	1.10	1.04	1.08	1.06	1.05	1.04
2700	1.33	1.32	1.25	1.24	1.11	1.05	1.08	1.07	1.06	1.04
2800	1.38	1.37	1.27	1.25	1.11	1.05	1.08	1.07	1.06	1.05
3000	1.46	1.45	1.31	1.26	1.12	1.05	1.09	1.07	1.06	1.05
3100	1.50	1.49	1.32	1.27	1.12	1.05	1.09	1.07	1.07	1.05
3300	1.54	1.53	1.34	1.28	1.13	1.06	1.09	1.08	1.07	1.05
3400	1.54	1.53	1.34	1.28	1.13	1.06	1.09	1.08	1.07	1.06
3600	1.48	1.49	1.32	1.28	1.13	1.06	1.08	1.07	1.07	1.06
3700	1.42	1.44	1.30	1.27	1.13	1.06	1.08	1.07	1.07	1.06
3900	1.28	1.31	1.25	1.26	1.12	1.06	1.07	1.06	1.06	1.06
4000	1.22	1.26	1.23	1.25	1.12	1.06	1.06	1.05	1.06	1.05
4200	1.18	1.20	1.22	1.25	1.12	1.06	1.04	1.04	1.05	1.05
4300	1.19	1.20	1.22	1.25	1.11	1.06	1.03	1.03	1.04	1.05
4500	1.20	1.19	1.23	1.24	1.11	1.06	1.03	1.03	1.03	1.05
4600	1.19	1.18	1.22	1.24	1.11	1.06	1.04	1.03	1.03	1.06
4800	1.13	1.12	1.19	1.21	1.10	1.07	1.06	1.06	1.05	1.07
4900	1.12	1.10	1.18	1.20	1.09	1.08	1.08	1.07	1.06	1.08
5100	1.13	1.11	1.16	1.17	1.08	1.10	1.12	1.11	1.09	1.10
5200	1.13	1.12	1.15	1.15	1.07	1.11	1.14	1.13	1.11	1.12
5400	1.10	1.09	1.11	1.09	1.06	1.14	1.19	1.18	1.15	1.15
5500	1.07	1.07	1.08	1.07	1.06	1.15	1.21	1.20	1.17	1.17
5700	1.04	1.05	1.03	1.03	1.09	1.19	1.26	1.25	1.21	1.20
5800	1.04	1.04	1.04	1.05	1.11	1.20	1.29	1.27	1.24	1.22
6000	1.01	1.01	1.09	1.12	1.17	1.24	1.33	1.32	1.28	1.26
6100	1.05	1.04	1.13	1.16	1.21	1.26	1.36	1.34	1.31	1.28
6300	1.21	1.19	1.25	1.25	1.28	1.31	1.40	1.39	1.36	1.32
6400	1.31	1.29	1.31	1.30	1.32	1.33	1.42	1.40	1.38	1.34
6600	1.54	1.51	1.47	1.42	1.40	1.37	1.45	1.44	1.43	1.38
6700	1.58	1.56	1.51	1.45	1.42	1.38	1.46	1.45	1.45	1.39
6900	1.64	1.63	1.58	1.51	1.47	1.41	1.47	1.47	1.48	1.42
7000	1.64	1.64	1.60	1.54	1.49	1.43	1.47	1.48	1.49	1.43
7200	1.62	1.63	1.61	1.58	1.52	1.45	1.47	1.49	1.51	1.45
7300	1.61	1.63	1.62	1.59	1.53	1.46	1.46	1.49	1.52	1.46
7500	1.63	1.65	1.62	1.60	1.54	1.47	1.44	1.48	1.53	1.46
7600	1.66	1.67	1.62	1.61	1.54	1.47	1.42	1.47	1.53	1.46
7800	1.71	1.71	1.63	1.62	1.53	1.46	1.39	1.45	1.52	1.46
7900	1.71	1.70	1.62	1.62	1.53	1.46	1.37	1.44	1.52	1.45
8000	1.68	1.68	1.61	1.61	1.52	1.46	1.35	1.42	1.51	1.45

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 25°C

FREQUENCY (MHz)	I. Loss (dB)	Cross-Over Isolation (dB)							
		In1-In2	In1-out2	Out1- In2	Out1- Out2	In3-In4	In3- Out4	Out3- In4	Out3- Out4
1	2.73	110.59	107.24	106.52	109.25	108.79	109.14	106.14	107.33
5	2.74	108.07	108.64	107.47	107.80	108.20	109.27	106.68	106.99
10	2.74	119.86	118.37	121.57	115.98	115.17	118.77	118.58	114.74
20	2.76	122.20	125.95	124.38	127.50	120.75	125.28	124.01	125.04
50	2.79	125.45	124.31	124.98	125.40	123.60	126.80	123.70	124.92
100	2.86	121.80	125.81	124.52	126.98	124.94	126.58	126.34	127.45
200	2.99	124.69	124.52	123.60	123.08	124.56	123.66	126.10	124.81
300	3.14	124.09	128.51	129.68	125.38	126.57	123.32	126.08	126.19
500	3.45	124.67	129.63	126.21	126.50	125.32	125.38	127.35	127.57
700	3.74	123.11	122.82	127.89	126.05	125.66	125.04	124.20	126.59
900	3.96	128.62	124.75	120.49	123.16	126.47	124.35	124.71	120.86
1000	4.03	125.63	124.11	125.16	125.02	123.30	127.42	123.93	126.65
1200	4.16	122.99	124.37	123.95	123.89	124.95	122.28	122.26	126.72
1400	4.29	123.05	128.48	124.16	123.57	120.30	126.69	125.90	124.94
1500	4.36	125.82	125.52	124.37	123.83	126.59	123.97	126.34	123.09
1600	4.44	126.10	121.79	123.18	126.51	123.97	122.99	123.21	128.75
1800	4.60	124.20	122.57	124.42	123.26	123.96	120.57	122.11	125.16
2000	4.76	124.00	120.08	120.00	127.12	122.07	125.44	122.46	125.65
2100	4.83	124.71	122.50	124.44	124.21	124.81	125.80	126.88	122.38
2200	4.90	123.19	122.46	121.76	123.88	126.26	123.56	124.89	123.93
2400	5.01	122.88	124.25	128.07	121.21	123.57	121.76	124.04	123.59
2500	5.07	126.99	122.86	124.53	123.57	123.28	123.78	121.87	122.93
2700	5.19	123.50	125.24	128.00	126.16	123.96	124.01	126.24	123.76
2800	5.26	121.90	124.30	124.04	121.17	122.88	123.24	124.00	123.47
3000	5.40	125.54	126.61	126.97	125.19	120.32	126.24	126.03	124.45
3100	5.48	124.09	126.68	122.98	123.51	125.38	125.23	123.12	122.32
3300	5.65	123.57	126.63	124.40	124.11	122.40	124.56	122.28	125.42
3400	5.75	123.51	125.66	124.34	124.92	123.21	122.44	124.52	121.76
3600	5.98	123.12	123.80	124.24	121.76	124.06	120.88	120.51	124.69
3700	6.12	123.61	124.53	125.24	123.96	124.50	125.40	123.87	120.34
3900	6.41	126.55	126.92	125.52	124.68	123.18	121.99	124.82	122.96
4000	6.57	124.21	125.03	122.41	123.39	121.37	122.94	128.72	128.05
4200	6.89	122.87	123.67	123.05	120.97	125.63	123.10	121.96	124.55
4300	7.05	121.64	122.94	121.21	122.61	124.23	123.01	121.72	124.09
4500	7.33	128.53	124.80	123.64	124.04	123.42	123.91	121.31	124.95
4600	7.46	122.80	124.56	125.77	122.97	120.44	125.61	122.68	122.59
4800	7.69	125.59	126.45	120.86	122.94	126.21	125.22	125.55	125.53
4900	7.80	124.67	122.70	125.00	125.18	124.28	124.17	126.11	120.70
5100	7.95	123.17	122.12	124.76	122.56	122.34	122.03	123.54	123.86
5200	7.99	125.08	125.04	120.76	120.88	123.75	124.32	124.56	122.49
5400	8.01	121.47	125.48	120.00	119.97	124.56	123.46	122.17	124.13
5500	8.01	122.36	120.35	124.33	120.73	125.38	121.89	125.35	125.18
5700	8.01	122.42	121.68	126.39	123.08	123.65	126.49	127.10	126.56
5800	8.01	119.97	123.66	126.39	121.08	121.77	124.19	123.69	123.51
6000	8.00	119.90	122.92	121.80	123.35	124.90	122.66	124.73	121.88
6100	8.01	126.14	128.33	120.05	119.28	123.79	126.48	121.70	126.22
6300	8.09	122.10	124.50	125.48	123.12	123.52	124.68	122.44	121.37
6400	8.19	123.71	123.51	121.34	121.38	120.02	125.08	118.73	122.44
6600	8.55	120.48	122.16	122.24	118.30	121.34	124.67	120.81	123.60
6700	8.67	121.39	119.73	119.55	119.35	122.04	122.15	121.51	121.38
6900	8.94	123.38	123.54	117.13	117.07	124.29	122.81	120.11	122.29
7000	9.07	123.77	122.40	118.94	117.64	121.95	122.73	123.48	123.77
7200	9.31	122.06	120.05	119.55	121.35	123.15	121.04	119.93	125.53
7300	9.42	121.34	121.36	117.20	118.56	119.45	120.15	118.71	127.22
7500	9.68	115.29	118.12	114.37	116.54	116.55	118.14	115.93	116.71
7600	9.82	111.35	113.27	111.93	113.00	110.13	112.73	120.54	118.07
7800	10.11	100.23	106.46	103.40	103.78	100.54	105.99	111.07	110.67
7900	10.25	96.41	102.72	100.02	100.42	97.56	102.76	103.26	103.20
8000	10.39	93.99	100.54	98.39	98.49	95.63	99.71	100.05	100.31

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 25°C

FREQUENCY (MHz)	IP3 (dBm)
1	44.79
5	49.71
10	50.03
50	57.56
100	52.82
200	53.65
300	53.47
400	55.19
500	55.72
600	53.83
700	55.00
750	54.97
800	54.94
900	52.22
1000	54.25
1500	52.74
2000	53.33
2500	55.12
3000	55.11
3500	53.93
4000	52.06
4500	52.08
5000	51.58
5500	48.17
6000	48.12
6500	50.26
7000	48.60
7500	51.30
8000	47.20

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 50°C

FREQUENCY (MHz)	Attenuation relative to Insertion Loss (dB)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	0.29	1.07	5.17	9.98	19.86	39.26	58.83	78.14	88.56	93.21
5	0.29	1.07	5.17	9.98	19.86	39.25	58.83	78.11	88.05	92.78
10	0.29	1.07	5.17	9.98	19.86	39.25	58.83	78.16	87.82	92.35
20	0.29	1.07	5.17	9.98	19.86	39.26	58.85	78.31	87.88	92.62
50	0.29	1.07	5.16	9.98	19.85	39.25	58.83	78.34	87.89	92.71
100	0.29	1.06	5.16	9.97	19.85	39.24	58.83	78.34	87.88	92.55
200	0.28	1.05	5.12	9.92	19.79	39.18	58.77	78.25	87.78	92.49
300	0.28	1.04	5.06	9.84	19.70	39.08	58.67	78.16	87.82	92.50
500	0.27	1.00	4.95	9.69	19.52	38.90	58.48	77.95	87.45	92.14
700	0.26	0.98	4.86	9.57	19.38	38.74	58.33	77.81	87.30	92.02
900	0.25	0.97	4.82	9.51	19.31	38.67	58.27	77.74	87.22	92.02
1000	0.25	0.97	4.82	9.51	19.30	38.67	58.26	77.75	87.43	92.11
1200	0.25	0.97	4.84	9.53	19.32	38.68	58.29	77.83	87.43	92.01
1400	0.25	0.98	4.87	9.55	19.34	38.72	58.34	77.86	87.47	92.10
1500	0.25	0.98	4.87	9.56	19.35	38.73	58.36	77.92	87.47	92.34
1600	0.25	0.98	4.88	9.55	19.35	38.74	58.38	77.96	87.65	92.21
1800	0.25	0.98	4.87	9.54	19.35	38.75	58.42	78.09	87.66	92.38
2000	0.24	0.98	4.87	9.53	19.35	38.77	58.47	78.17	87.81	92.27
2100	0.24	0.98	4.87	9.53	19.35	38.79	58.52	78.22	87.85	92.61
2200	0.24	0.99	4.88	9.54	19.37	38.82	58.56	78.29	88.02	92.64
2400	0.25	1.00	4.91	9.59	19.44	38.91	58.69	78.45	88.28	93.07
2500	0.25	1.00	4.94	9.62	19.49	38.97	58.78	78.57	88.49	92.97
2700	0.25	1.02	4.99	9.69	19.59	39.10	58.95	78.88	88.42	93.19
2800	0.26	1.02	5.02	9.73	19.63	39.16	59.04	78.98	88.77	93.36
3000	0.26	1.03	5.05	9.77	19.71	39.26	59.20	79.21	89.07	93.84
3100	0.26	1.03	5.06	9.78	19.73	39.29	59.27	79.28	88.95	93.91
3300	0.27	1.03	5.06	9.79	19.75	39.34	59.38	79.45	89.40	94.16
3400	0.27	1.02	5.06	9.78	19.76	39.35	59.42	79.58	89.43	94.17
3600	0.27	1.01	5.04	9.76	19.75	39.37	59.52	79.71	89.51	94.06
3700	0.27	1.01	5.03	9.75	19.76	39.39	59.56	79.82	89.76	94.68
3900	0.27	1.00	5.02	9.74	19.76	39.42	59.67	80.05	90.05	94.49
4000	0.27	1.00	5.01	9.73	19.76	39.43	59.72	80.14	90.29	94.66
4200	0.27	1.00	5.01	9.72	19.78	39.48	59.84	80.35	90.29	95.43
4300	0.27	0.99	5.00	9.72	19.79	39.50	59.91	80.35	90.42	95.67
4500	0.27	0.99	5.00	9.72	19.81	39.56	60.05	80.71	90.78	95.80
4600	0.27	0.99	5.00	9.72	19.83	39.60	60.14	80.76	90.97	95.83
4800	0.26	1.00	5.01	9.73	19.87	39.68	60.33	81.00	91.19	96.17
4900	0.26	1.00	5.01	9.73	19.90	39.73	60.43	81.22	91.56	96.51
5100	0.26	1.01	5.02	9.75	19.95	39.84	60.63	81.50	91.55	96.96
5200	0.26	1.01	5.02	9.75	19.98	39.90	60.74	81.64	91.97	96.59
5400	0.26	1.01	5.02	9.77	20.03	40.01	60.97	81.86	91.93	97.78
5500	0.26	1.01	5.03	9.78	20.06	40.07	61.08	82.03	92.15	97.97
5700	0.27	1.02	5.05	9.82	20.15	40.22	61.34	82.50	92.27	97.02
5800	0.27	1.02	5.07	9.86	20.20	40.31	61.46	82.61	92.52	97.80
6000	0.28	1.03	5.13	9.95	20.33	40.48	61.74	82.80	93.22	98.26
6100	0.29	1.03	5.16	9.99	20.39	40.56	61.86	82.94	92.81	98.42
6300	0.30	1.03	5.18	10.03	20.45	40.65	62.03	83.19	93.39	97.98
6400	0.31	1.03	5.17	10.02	20.45	40.66	62.06	83.18	93.46	97.84
6600	0.31	1.01	5.11	9.95	20.37	40.62	62.03	83.19	93.12	98.25
6700	0.30	1.00	5.10	9.93	20.36	40.61	62.02	83.15	93.17	98.18
6900	0.30	0.99	5.08	9.91	20.33	40.60	62.02	83.06	93.29	98.75
7000	0.30	0.99	5.08	9.91	20.34	40.62	62.04	83.10	93.26	98.90
7200	0.29	1.00	5.11	9.94	20.39	40.69	62.06	83.10	93.07	98.91
7300	0.29	1.01	5.13	9.96	20.42	40.73	62.08	83.04	92.91	98.71
7500	0.29	1.02	5.16	9.99	20.47	40.81	62.06	82.92	93.10	97.88
7600	0.29	1.02	5.17	10.00	20.50	40.83	62.05	82.83	92.96	97.47
7800	0.29	1.03	5.19	10.02	20.54	40.88	61.99	82.69	93.04	97.59
7900	0.30	1.04	5.21	10.04	20.57	40.91	61.96	82.57	92.96	97.36
8000	0.30	1.05	5.24	10.07	20.62	40.94	61.94	82.47	93.05	97.10

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 50°C

FREQUENCY (MHz)	Attenuation accuracy relative to nominal attenuation setting (dB)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	-0.04	-0.07	-0.17	0.02	0.14	0.74	1.17	1.86	1.45	1.79
5	-0.04	-0.07	-0.17	0.02	0.14	0.75	1.17	1.89	1.95	2.22
10	-0.04	-0.07	-0.17	0.02	0.14	0.75	1.17	1.84	2.18	2.65
20	-0.04	-0.07	-0.17	0.02	0.14	0.74	1.15	1.69	2.12	2.38
50	-0.04	-0.07	-0.16	0.02	0.15	0.75	1.17	1.66	2.11	2.29
100	-0.04	-0.06	-0.16	0.03	0.15	0.76	1.17	1.66	2.12	2.45
200	-0.03	-0.05	-0.12	0.08	0.21	0.82	1.23	1.75	2.22	2.51
300	-0.03	-0.03	-0.06	0.16	0.30	0.92	1.33	1.84	2.18	2.50
500	-0.02	0.00	0.05	0.31	0.48	1.11	1.52	2.05	2.55	2.86
700	-0.01	0.02	0.14	0.43	0.62	1.26	1.67	2.19	2.70	2.98
900	0.00	0.04	0.18	0.49	0.69	1.33	1.73	2.26	2.78	2.98
1000	0.00	0.03	0.18	0.49	0.70	1.33	1.74	2.25	2.57	2.89
1200	0.00	0.03	0.16	0.47	0.68	1.32	1.71	2.17	2.57	2.99
1400	0.00	0.02	0.13	0.45	0.66	1.28	1.66	2.14	2.53	2.90
1500	0.00	0.02	0.13	0.44	0.65	1.27	1.64	2.08	2.53	2.66
1600	0.00	0.02	0.13	0.45	0.65	1.26	1.62	2.04	2.35	2.79
1800	0.00	0.02	0.13	0.46	0.65	1.25	1.58	1.91	2.34	2.62
2000	0.01	0.02	0.14	0.47	0.66	1.23	1.53	1.83	2.19	2.73
2100	0.01	0.02	0.13	0.47	0.65	1.21	1.48	1.78	2.15	2.39
2200	0.01	0.01	0.13	0.46	0.63	1.18	1.44	1.71	1.98	2.36
2400	0.00	0.00	0.09	0.41	0.56	1.09	1.31	1.55	1.72	1.93
2500	0.00	0.00	0.07	0.38	0.51	1.03	1.22	1.43	1.51	2.03
2700	0.00	-0.01	0.01	0.31	0.41	0.90	1.05	1.12	1.58	1.81
2800	0.00	-0.02	-0.01	0.27	0.37	0.84	0.96	1.02	1.23	1.64
3000	-0.01	-0.03	-0.05	0.23	0.29	0.74	0.80	0.79	0.93	1.16
3100	-0.01	-0.03	-0.06	0.22	0.27	0.71	0.73	0.72	1.05	1.09
3300	-0.01	-0.03	-0.06	0.21	0.25	0.66	0.63	0.55	0.60	0.85
3400	-0.02	-0.02	-0.05	0.22	0.24	0.65	0.58	0.43	0.57	0.83
3600	-0.02	-0.01	-0.04	0.24	0.25	0.63	0.48	0.29	0.49	0.94
3700	-0.02	-0.01	-0.03	0.25	0.25	0.62	0.44	0.18	0.24	0.32
3900	-0.02	0.00	-0.02	0.26	0.24	0.58	0.33	-0.05	-0.05	0.51
4000	-0.01	0.00	-0.01	0.27	0.24	0.57	0.28	-0.14	-0.29	0.34
4200	-0.02	0.00	-0.01	0.28	0.22	0.52	0.17	-0.35	-0.29	-0.43
4300	-0.02	0.01	0.00	0.28	0.21	0.50	0.09	-0.35	-0.42	-0.67
4500	-0.02	0.01	0.00	0.28	0.19	0.44	-0.05	-0.71	-0.78	-0.80
4600	-0.01	0.01	0.00	0.28	0.17	0.40	-0.13	-0.76	-0.97	-0.82
4800	-0.01	0.00	-0.01	0.27	0.13	0.32	-0.33	-1.00	-1.19	-1.17
4900	-0.01	0.00	-0.01	0.27	0.10	0.27	-0.43	-1.22	-1.56	-1.51
5100	-0.01	-0.01	-0.02	0.25	0.05	0.16	-0.63	-1.50	-1.55	-1.96
5200	-0.01	-0.01	-0.02	0.25	0.02	0.10	-0.74	-1.64	-1.97	-1.59
5400	-0.01	-0.01	-0.02	0.23	-0.03	-0.01	-0.97	-1.86	-1.93	-2.78
5500	-0.01	-0.01	-0.03	0.22	-0.06	-0.07	-1.08	-2.03	-2.15	-2.97
5700	-0.02	-0.01	-0.05	0.18	-0.15	-0.22	-1.34	-2.50	-2.27	-2.02
5800	-0.02	-0.02	-0.07	0.14	-0.20	-0.31	-1.46	-2.61	-2.52	-2.80
6000	-0.03	-0.03	-0.13	0.05	-0.33	-0.48	-1.74	-2.80	-3.22	-3.26
6100	-0.04	-0.03	-0.16	0.01	-0.39	-0.56	-1.86	-2.94	-2.81	-3.42
6300	-0.05	-0.03	-0.18	-0.03	-0.45	-0.65	-2.03	-3.19	-3.39	-2.97
6400	-0.06	-0.03	-0.17	-0.02	-0.45	-0.66	-2.06	-3.18	-3.46	-2.84
6600	-0.06	0.00	-0.11	0.05	-0.37	-0.62	-2.03	-3.19	-3.12	-3.25
6700	-0.05	0.00	-0.09	0.07	-0.36	-0.61	-2.02	-3.15	-3.17	-3.18
6900	-0.05	0.01	-0.08	0.10	-0.33	-0.60	-2.02	-3.06	-3.29	-3.75
7000	-0.05	0.01	-0.08	0.09	-0.34	-0.62	-2.04	-3.10	-3.26	-3.89
7200	-0.04	0.00	-0.11	0.06	-0.39	-0.69	-2.06	-3.10	-3.07	-3.91
7300	-0.04	-0.01	-0.13	0.04	-0.42	-0.73	-2.08	-3.04	-2.91	-3.71
7500	-0.04	-0.02	-0.16	0.01	-0.47	-0.81	-2.06	-2.92	-3.10	-2.88
7600	-0.04	-0.02	-0.17	0.00	-0.50	-0.83	-2.05	-2.83	-2.96	-2.47
7800	-0.04	-0.03	-0.19	-0.02	-0.54	-0.88	-1.99	-2.69	-3.04	-2.59
7900	-0.05	-0.04	-0.21	-0.04	-0.57	-0.91	-1.96	-2.57	-2.96	-2.36
8000	-0.05	-0.05	-0.24	-0.07	-0.62	-0.94	-1.94	-2.47	-3.05	-2.10

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 50°C

FREQUENCY (MHz)	Input VSWR (:1)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	1.69	1.58	1.41	1.22	1.16	1.08	1.02	1.07	1.07	1.08
5	1.69	1.58	1.40	1.22	1.16	1.08	1.01	1.07	1.07	1.08
10	1.69	1.58	1.40	1.22	1.16	1.08	1.00	1.07	1.06	1.08
20	1.69	1.58	1.40	1.22	1.16	1.08	1.00	1.06	1.06	1.07
50	1.68	1.57	1.40	1.21	1.16	1.08	1.00	1.06	1.06	1.07
100	1.67	1.56	1.39	1.21	1.15	1.07	1.00	1.07	1.06	1.08
200	1.61	1.52	1.37	1.20	1.15	1.07	1.00	1.07	1.06	1.08
300	1.55	1.46	1.34	1.19	1.15	1.07	1.01	1.06	1.06	1.07
500	1.40	1.34	1.29	1.17	1.15	1.08	1.01	1.06	1.06	1.07
700	1.24	1.21	1.22	1.15	1.14	1.08	1.02	1.05	1.05	1.06
900	1.11	1.10	1.17	1.12	1.13	1.08	1.02	1.05	1.05	1.06
1000	1.07	1.08	1.15	1.11	1.13	1.08	1.02	1.05	1.05	1.06
1200	1.08	1.11	1.13	1.10	1.13	1.08	1.03	1.05	1.05	1.06
1400	1.13	1.15	1.13	1.09	1.12	1.08	1.03	1.04	1.05	1.05
1500	1.15	1.16	1.13	1.08	1.12	1.08	1.03	1.04	1.05	1.05
1600	1.15	1.16	1.13	1.08	1.12	1.08	1.03	1.04	1.06	1.05
1800	1.12	1.13	1.11	1.08	1.12	1.08	1.03	1.05	1.06	1.06
2000	1.08	1.09	1.11	1.09	1.13	1.08	1.03	1.05	1.07	1.06
2100	1.07	1.08	1.11	1.09	1.13	1.08	1.03	1.05	1.07	1.06
2200	1.09	1.09	1.12	1.10	1.13	1.08	1.03	1.05	1.07	1.07
2400	1.16	1.14	1.16	1.12	1.14	1.08	1.04	1.06	1.08	1.07
2500	1.21	1.18	1.18	1.14	1.15	1.09	1.04	1.06	1.09	1.07
2700	1.30	1.26	1.24	1.16	1.16	1.09	1.05	1.06	1.09	1.08
2800	1.34	1.30	1.26	1.17	1.16	1.09	1.05	1.07	1.10	1.08
3000	1.41	1.36	1.30	1.20	1.18	1.10	1.06	1.07	1.10	1.08
3100	1.43	1.38	1.32	1.21	1.18	1.10	1.06	1.07	1.10	1.08
3300	1.43	1.39	1.33	1.22	1.19	1.11	1.07	1.07	1.10	1.08
3400	1.42	1.39	1.33	1.22	1.19	1.11	1.07	1.06	1.10	1.07
3600	1.37	1.35	1.32	1.22	1.20	1.12	1.07	1.06	1.10	1.07
3700	1.33	1.32	1.31	1.21	1.20	1.12	1.07	1.05	1.09	1.06
3900	1.26	1.26	1.28	1.20	1.21	1.12	1.08	1.04	1.08	1.05
4000	1.21	1.23	1.26	1.19	1.21	1.12	1.08	1.03	1.08	1.04
4200	1.15	1.18	1.23	1.18	1.21	1.13	1.08	1.02	1.06	1.02
4300	1.14	1.17	1.21	1.18	1.21	1.13	1.09	1.01	1.05	1.01
4500	1.17	1.18	1.20	1.18	1.22	1.13	1.10	1.02	1.03	1.01
4600	1.20	1.20	1.20	1.18	1.22	1.13	1.10	1.03	1.02	1.03
4800	1.25	1.24	1.20	1.19	1.21	1.14	1.11	1.06	1.04	1.06
4900	1.26	1.24	1.20	1.19	1.21	1.14	1.12	1.08	1.06	1.07
5100	1.24	1.22	1.19	1.19	1.20	1.15	1.14	1.12	1.10	1.11
5200	1.22	1.20	1.18	1.19	1.20	1.16	1.15	1.14	1.12	1.14
5400	1.17	1.15	1.16	1.17	1.18	1.18	1.18	1.19	1.17	1.18
5500	1.16	1.15	1.16	1.17	1.17	1.19	1.19	1.21	1.20	1.21
5700	1.17	1.16	1.16	1.16	1.17	1.22	1.22	1.27	1.26	1.26
5800	1.17	1.17	1.15	1.16	1.17	1.24	1.24	1.30	1.29	1.29
6000	1.15	1.15	1.14	1.16	1.18	1.28	1.28	1.36	1.36	1.36
6100	1.11	1.12	1.13	1.16	1.19	1.30	1.31	1.39	1.40	1.39
6300	1.07	1.09	1.13	1.19	1.23	1.35	1.36	1.46	1.48	1.46
6400	1.11	1.12	1.14	1.21	1.24	1.37	1.38	1.50	1.51	1.49
6600	1.27	1.25	1.23	1.28	1.29	1.43	1.44	1.59	1.62	1.58
6700	1.31	1.28	1.25	1.30	1.31	1.45	1.46	1.61	1.64	1.61
6900	1.39	1.36	1.32	1.36	1.35	1.49	1.50	1.68	1.72	1.67
7000	1.41	1.39	1.35	1.39	1.37	1.51	1.52	1.71	1.76	1.71
7200	1.44	1.43	1.42	1.44	1.41	1.55	1.57	1.78	1.84	1.77
7300	1.46	1.45	1.46	1.47	1.44	1.58	1.59	1.81	1.88	1.81
7500	1.53	1.54	1.55	1.53	1.49	1.61	1.62	1.87	1.95	1.86
7600	1.58	1.59	1.60	1.57	1.52	1.63	1.64	1.89	1.98	1.89
7800	1.71	1.73	1.73	1.66	1.59	1.66	1.67	1.93	2.03	1.93
7900	1.77	1.79	1.79	1.71	1.63	1.67	1.68	1.95	2.05	1.95
8000	1.83	1.85	1.86	1.76	1.67	1.68	1.69	1.96	2.07	1.96

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 50°C

FREQUENCY (MHz)	Output VSWR (:1)									
	0.25 dB	1 dB	5 dB	10 dB	20 dB	40 dB	60 dB	80 dB	90 dB	95 dB
1	1.69	1.65	1.34	1.24	1.05	1.05	1.04	1.02	1.04	1.05
5	1.69	1.65	1.34	1.23	1.05	1.04	1.03	1.02	1.04	1.05
10	1.69	1.65	1.33	1.23	1.05	1.04	1.03	1.01	1.04	1.05
20	1.69	1.65	1.33	1.23	1.04	1.04	1.03	1.01	1.03	1.04
50	1.68	1.64	1.33	1.23	1.04	1.04	1.02	1.01	1.03	1.05
100	1.67	1.63	1.32	1.22	1.04	1.04	1.02	1.01	1.03	1.04
200	1.62	1.59	1.31	1.22	1.04	1.04	1.03	1.02	1.04	1.05
300	1.57	1.54	1.29	1.22	1.05	1.04	1.04	1.02	1.03	1.04
500	1.42	1.42	1.25	1.20	1.06	1.03	1.05	1.03	1.03	1.04
700	1.27	1.28	1.20	1.20	1.07	1.03	1.06	1.04	1.03	1.03
900	1.14	1.17	1.18	1.19	1.08	1.03	1.07	1.05	1.04	1.03
1000	1.11	1.14	1.17	1.20	1.08	1.03	1.08	1.05	1.04	1.03
1200	1.13	1.13	1.19	1.21	1.08	1.03	1.08	1.06	1.04	1.03
1400	1.18	1.17	1.21	1.22	1.08	1.03	1.09	1.06	1.04	1.03
1500	1.20	1.18	1.22	1.23	1.09	1.03	1.09	1.06	1.04	1.03
1600	1.20	1.18	1.22	1.23	1.09	1.03	1.09	1.06	1.04	1.03
1800	1.17	1.15	1.20	1.22	1.09	1.03	1.09	1.06	1.05	1.03
2000	1.10	1.09	1.18	1.22	1.09	1.04	1.09	1.07	1.05	1.04
2100	1.07	1.07	1.17	1.21	1.10	1.04	1.09	1.07	1.05	1.04
2200	1.07	1.08	1.17	1.21	1.10	1.04	1.09	1.07	1.06	1.04
2400	1.16	1.17	1.19	1.22	1.11	1.05	1.10	1.08	1.06	1.05
2500	1.23	1.23	1.21	1.23	1.11	1.05	1.10	1.08	1.06	1.05
2700	1.36	1.35	1.27	1.25	1.13	1.06	1.10	1.08	1.07	1.05
2800	1.42	1.41	1.29	1.26	1.13	1.06	1.11	1.09	1.07	1.06
3000	1.51	1.50	1.34	1.29	1.14	1.07	1.11	1.09	1.08	1.06
3100	1.54	1.52	1.35	1.30	1.15	1.07	1.11	1.09	1.08	1.07
3300	1.54	1.54	1.36	1.31	1.15	1.08	1.11	1.10	1.09	1.07
3400	1.52	1.52	1.36	1.31	1.16	1.08	1.11	1.10	1.09	1.08
3600	1.46	1.47	1.34	1.31	1.16	1.09	1.11	1.10	1.10	1.09
3700	1.41	1.43	1.33	1.30	1.16	1.09	1.11	1.10	1.10	1.09
3900	1.32	1.35	1.29	1.29	1.16	1.10	1.10	1.09	1.10	1.09
4000	1.28	1.31	1.28	1.29	1.16	1.10	1.09	1.09	1.10	1.09
4200	1.21	1.23	1.25	1.27	1.15	1.10	1.08	1.07	1.09	1.09
4300	1.19	1.20	1.24	1.27	1.15	1.10	1.07	1.07	1.08	1.09
4500	1.17	1.17	1.22	1.25	1.14	1.10	1.05	1.05	1.07	1.09
4600	1.17	1.16	1.21	1.24	1.13	1.10	1.05	1.05	1.06	1.09
4800	1.18	1.15	1.20	1.22	1.12	1.10	1.06	1.06	1.06	1.09
4900	1.17	1.15	1.19	1.20	1.12	1.11	1.07	1.07	1.07	1.10
5100	1.13	1.12	1.16	1.16	1.10	1.11	1.11	1.10	1.08	1.11
5200	1.11	1.11	1.14	1.13	1.09	1.12	1.14	1.12	1.10	1.12
5400	1.08	1.09	1.09	1.07	1.08	1.14	1.18	1.17	1.13	1.15
5500	1.08	1.08	1.06	1.04	1.08	1.15	1.21	1.19	1.15	1.16
5700	1.07	1.07	1.01	1.02	1.10	1.18	1.26	1.24	1.20	1.19
5800	1.05	1.05	1.02	1.06	1.12	1.20	1.29	1.27	1.23	1.21
6000	1.02	1.02	1.10	1.13	1.17	1.23	1.34	1.31	1.27	1.25
6100	1.08	1.07	1.15	1.18	1.21	1.26	1.36	1.34	1.30	1.27
6300	1.25	1.24	1.27	1.28	1.28	1.30	1.41	1.39	1.35	1.31
6400	1.36	1.34	1.34	1.33	1.32	1.32	1.42	1.40	1.37	1.33
6600	1.57	1.55	1.50	1.45	1.40	1.36	1.45	1.44	1.42	1.37
6700	1.61	1.59	1.53	1.48	1.42	1.37	1.46	1.45	1.44	1.38
6900	1.66	1.65	1.59	1.54	1.47	1.39	1.46	1.46	1.46	1.40
7000	1.66	1.66	1.61	1.56	1.48	1.40	1.46	1.47	1.47	1.41
7200	1.63	1.65	1.63	1.59	1.51	1.42	1.45	1.47	1.49	1.42
7300	1.62	1.64	1.63	1.60	1.52	1.43	1.45	1.47	1.50	1.43
7500	1.63	1.64	1.63	1.61	1.52	1.44	1.43	1.46	1.51	1.44
7600	1.65	1.66	1.63	1.62	1.52	1.44	1.41	1.46	1.51	1.44
7800	1.68	1.68	1.62	1.62	1.51	1.44	1.38	1.44	1.51	1.44
7900	1.68	1.67	1.61	1.62	1.51	1.44	1.36	1.42	1.50	1.43
8000	1.65	1.65	1.60	1.61	1.50	1.43	1.34	1.41	1.49	1.43

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 50°C

FREQUENCY (MHz)	I. Loss (dB)	Cross-Over Isolation (dB)			
		In1-In2	In1-out2	Out1-In2	Out1-Out2
1	2.85	107.92	108.96	113.80	109.49
5	2.85	107.95	107.79	109.98	110.91
10	2.86	118.12	114.66	115.36	118.25
20	2.87	126.89	123.53	124.50	123.19
50	2.89	123.89	126.88	124.71	122.44
100	2.96	124.43	126.38	127.51	126.63
200	3.10	126.48	124.01	126.85	126.26
300	3.27	126.13	124.29	122.84	124.71
500	3.60	127.62	127.05	126.01	125.39
700	3.89	125.16	127.12	123.07	124.96
900	4.10	125.58	125.61	123.33	124.63
1000	4.18	124.99	127.42	127.43	123.38
1200	4.31	125.64	126.54	126.41	123.44
1400	4.43	120.93	123.88	123.93	125.05
1500	4.49	125.29	125.13	123.75	126.34
1600	4.57	123.84	125.65	125.55	124.06
1800	4.72	123.21	126.01	125.89	122.08
2000	4.87	125.02	125.97	123.45	125.39
2100	4.94	122.45	122.99	123.29	123.43
2200	5.00	122.65	126.12	127.02	124.64
2400	5.09	124.12	122.50	121.04	123.43
2500	5.12	124.35	122.68	126.77	126.52
2700	5.20	122.95	126.36	122.07	120.72
2800	5.24	123.78	123.83	122.46	123.31
3000	5.35	128.01	124.97	125.23	120.62
3100	5.43	122.96	127.23	124.25	121.94
3300	5.61	124.40	123.55	122.61	121.30
3400	5.71	127.32	125.83	125.28	123.28
3600	5.92	122.31	124.43	121.89	122.18
3700	6.03	124.26	125.20	127.81	124.93
3900	6.24	124.38	127.28	121.02	123.35
4000	6.35	121.30	121.49	123.38	123.89
4200	6.57	123.77	126.85	124.24	121.72
4300	6.67	122.23	123.77	122.44	119.69
4500	6.86	124.06	123.20	124.28	126.82
4600	6.96	124.72	122.59	124.26	122.44
4800	7.13	124.94	123.94	122.81	123.22
4900	7.20	121.37	123.78	123.97	127.00
5100	7.34	121.29	123.46	123.57	121.62
5200	7.41	121.88	124.20	122.32	124.15
5400	7.54	124.22	124.85	122.15	121.50
5500	7.60	122.62	121.78	123.31	119.80
5700	7.71	120.11	123.77	122.24	122.50
5800	7.76	123.83	123.83	123.85	120.92
6000	7.84	125.15	122.51	121.76	121.45
6100	7.89	124.24	124.12	120.95	120.51
6300	8.07	119.87	123.40	122.31	120.66
6400	8.21	123.53	124.75	120.65	121.94
6600	8.63	121.32	124.10	124.29	121.35
6700	8.75	120.89	127.34	122.10	118.73
6900	9.05	118.67	124.80	117.84	118.67
7000	9.20	118.34	125.04	118.88	120.74
7200	9.46	121.07	124.00	120.51	121.53
7300	9.59	120.23	125.50	120.51	117.75
7500	9.87	116.23	120.85	115.86	114.74
7600	10.02	112.17	116.63	114.32	112.58
7800	10.33	101.92	107.93	106.09	107.02
7900	10.48	98.39	104.45	102.27	101.87
8000	10.62	95.77	102.58	100.25	99.95

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Data @ 50°C

FREQUENCY (MHz)	IP3 (dBm)
1	42.81
5	51.11
10	51.91
50	51.42
100	51.00
200	52.64
300	53.55
400	55.60
500	55.60
600	55.40
700	54.19
750	54.07
800	53.94
900	53.54
1000	54.46
1500	54.45
2000	54.45
2500	55.38
3000	54.63
3500	51.75
4000	51.07
4500	49.07
5000	52.48
5500	47.31
6000	47.65
6500	47.71
7000	50.48
7500	51.49
8000	46.56

Notes





- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Curves @ 0°C

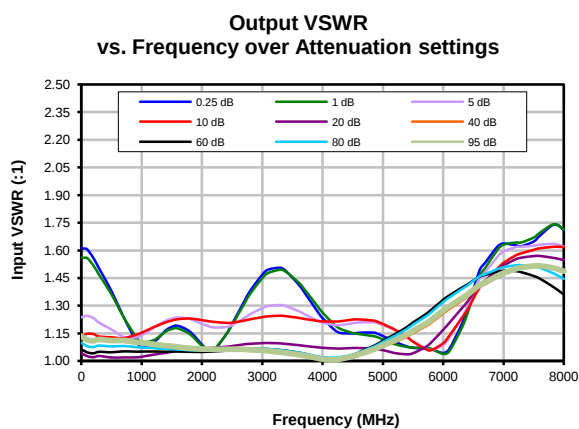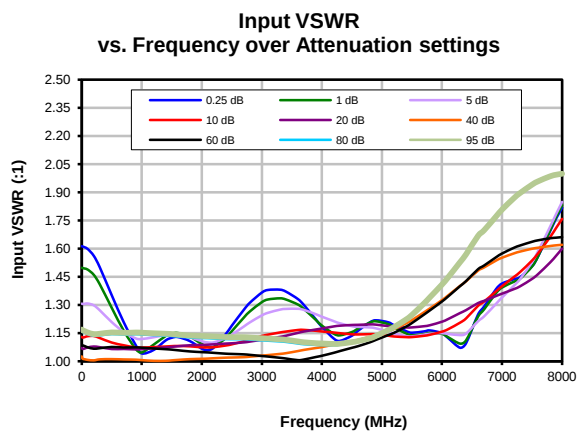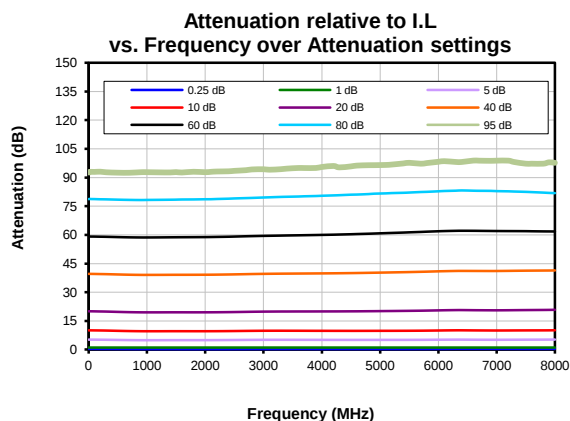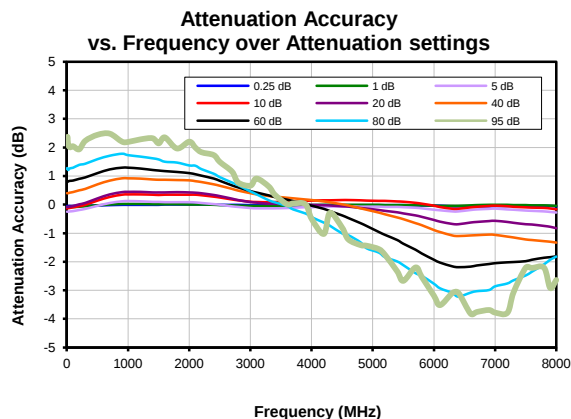

Notes




- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Curves @ 0°C

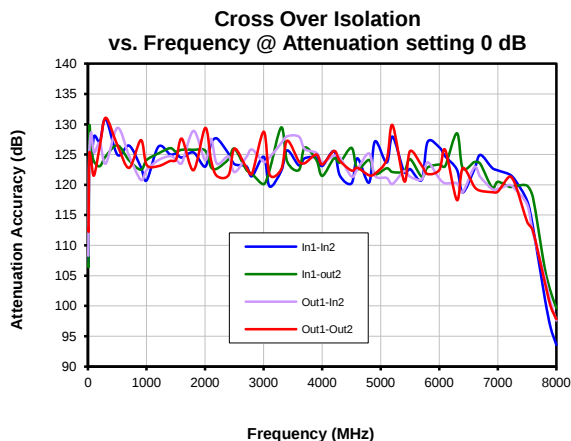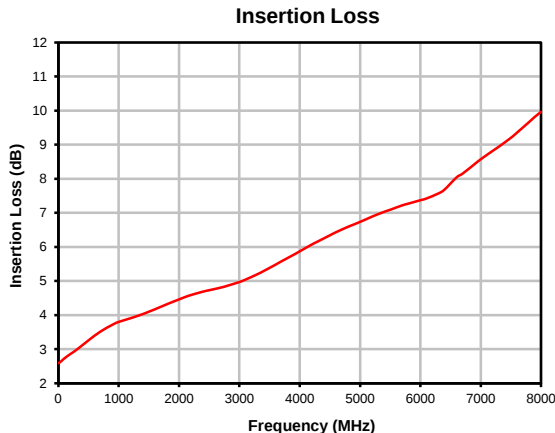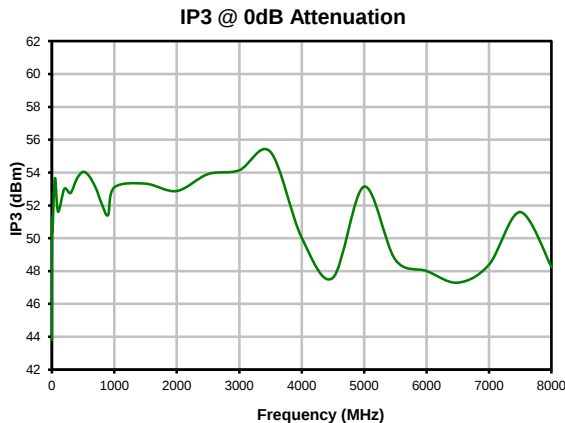

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp




Programmable Attenuator


RC4DAT-8G-95

Typical Performance Curves @ 25°C


Attenuation Accuracy
vs. Frequency over Attenuation settings

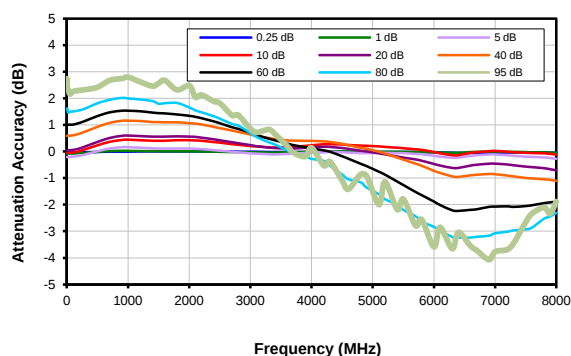


Attenuation relative to I.L.
vs. Frequency over Attenuation settings

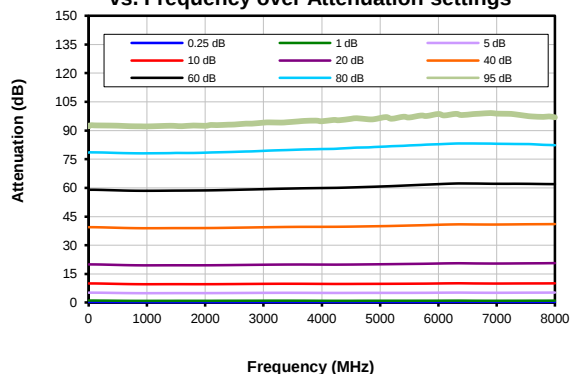

Input VSWR
vs. Frequency over Attenuation settings

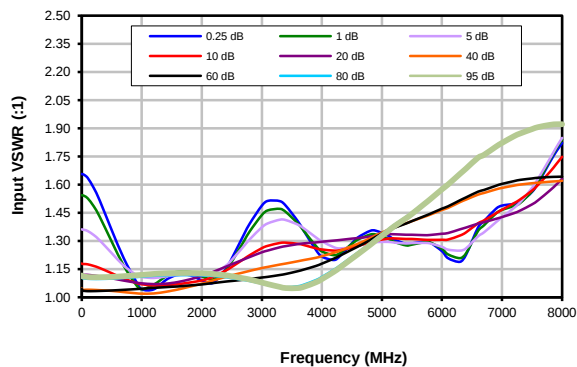

Output VSWR
vs. Frequency over Attenuation settings

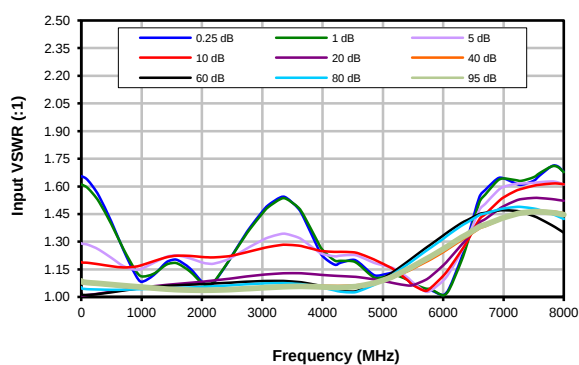

Notes




- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Curves @ 25°C

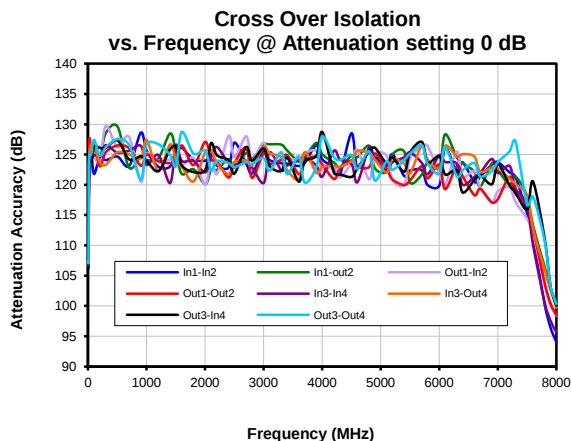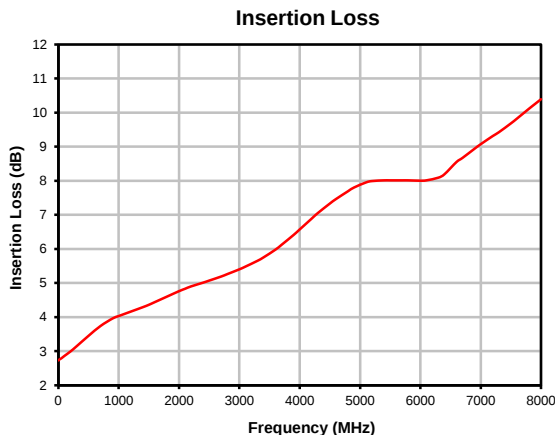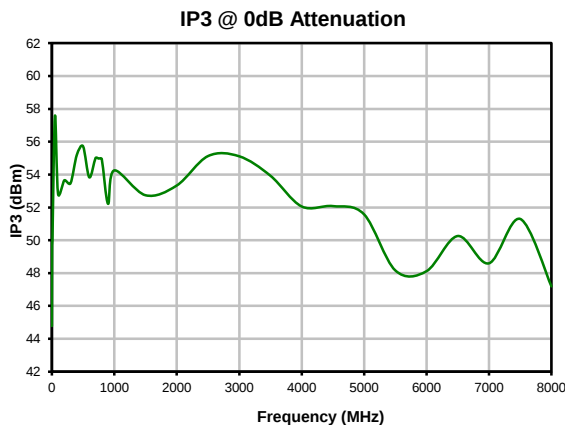

Notes





- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Curves @ 50°C

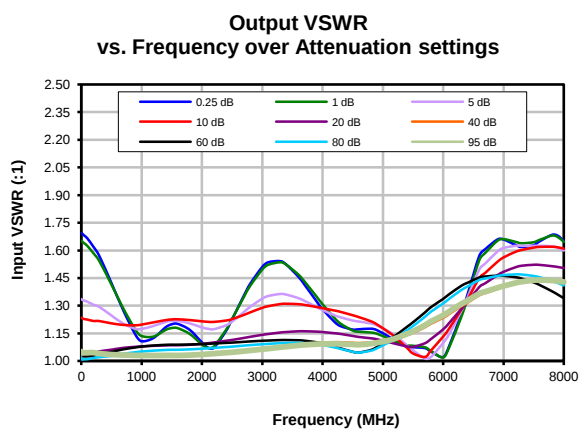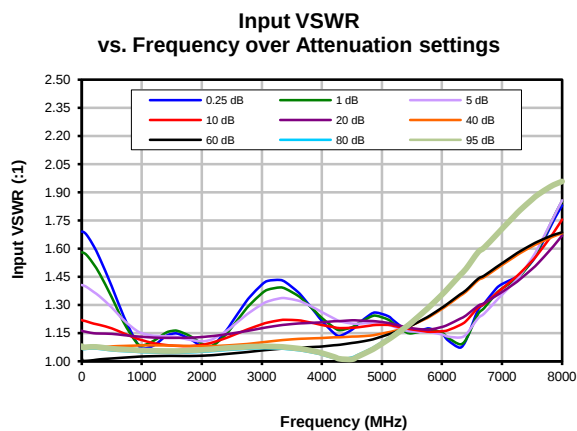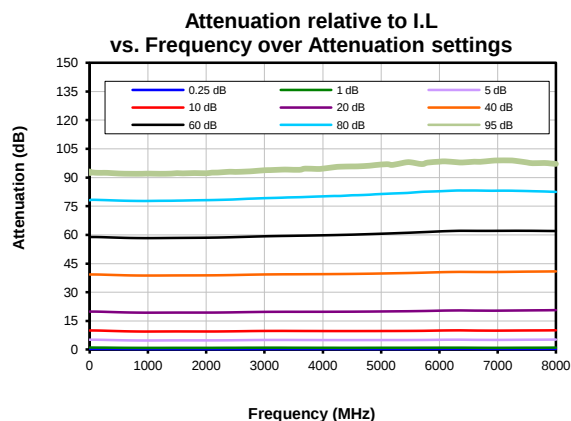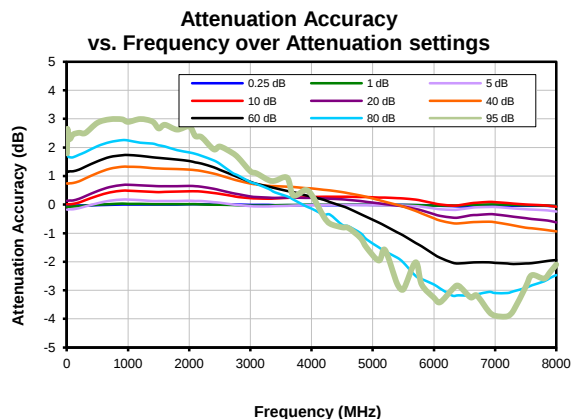

Notes




- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard warranty and terms and conditions collectively, "Standard Terms". Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp



Programmable Attenuator

RC4DAT-8G-95

Typical Performance Curves @ 50°C

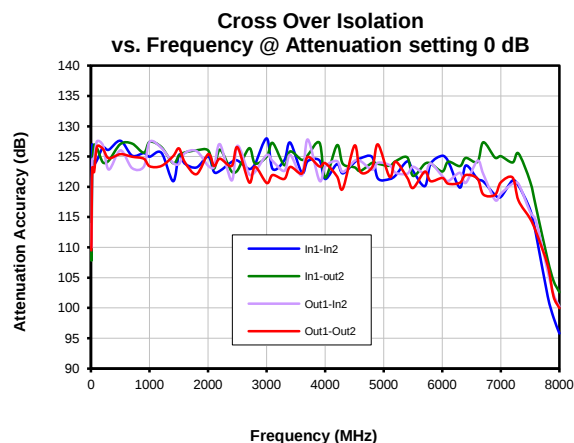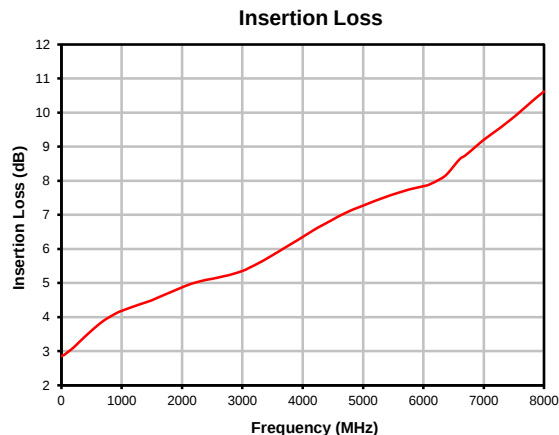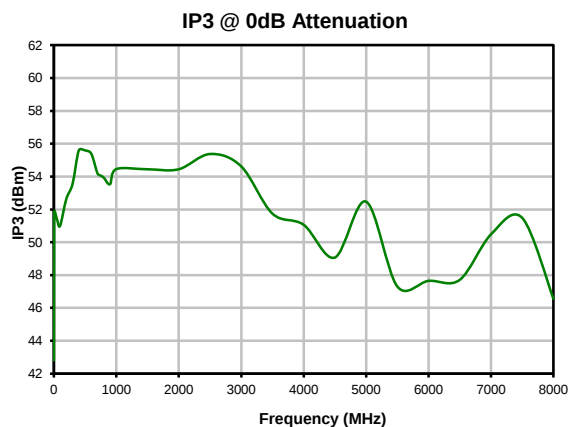

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp




Case Style

QE

Outline Dimensions

QE2972

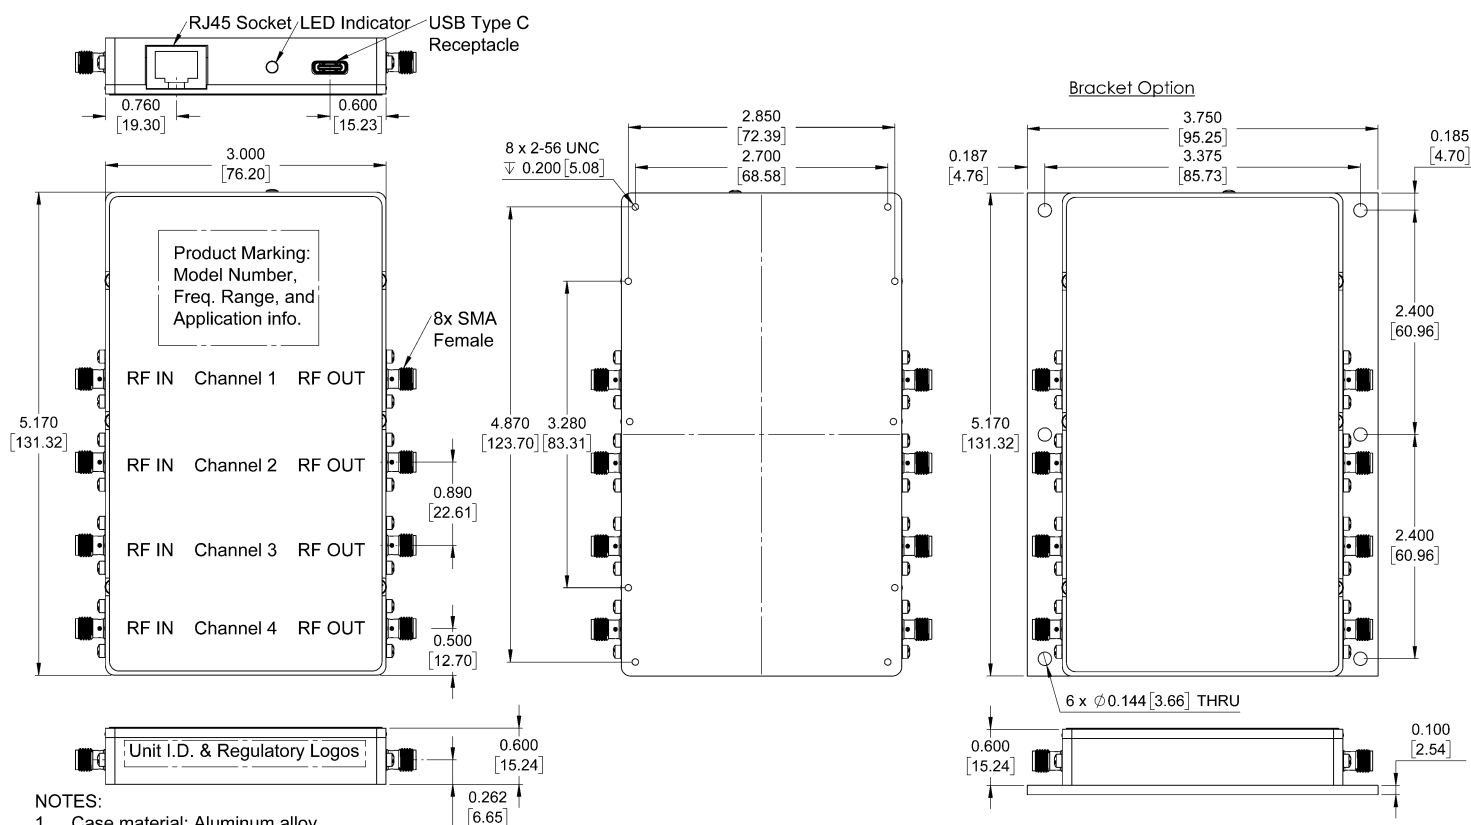

NOTES:

1. Case material: Aluminum alloy.
2. Case Finish: Nickel Plate.
3. Dimensions: Inches [mm]. Tolerances 2 Pl. $\pm$.03 inch; 3 Pl. $\pm$.015 inch.
4. Weight: 300 grams
5. Marking may contain other features or characters for internal lot control.



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com



Environmental Specifications ENV55T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-0° to 50° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-20° to 85° C Ambient Environment	Individual Model Data Sheet
Operating and Storage Humidity	5% to 85% RH (non-condensing)	Ambient
Bench Handling Test	Bench Top Tip 45° & Drop	MIL-PRF-28800F
Transit Drop Test	Free Fall Drop, 20 cm (7.9 inches)	MIL-PRF-28800F Class 3