


**THE BIG DEAL**

- Reflectionless Technology, Eliminates Reflections with 50Ω Match in Stopband
- Temperature Robust, up to +105°C Operation
- Compact Size, 3x3 mm 12-Lead QFN-Style Package
- Excellent Performance Repeatability




Generic photo used for illustration purposes only

PATENTS

- Protected by US Patent Nos. 10,516,378, 10,374,577, 10,263,592, 10,230,348, 9,705,467, and 8,392,495
- Protected by China Patent Nos. 107078708B, and 102365784B
- Protected by Taiwan Patent Nos. 653826B, and 581494B

APPLICATIONS

- Test and Measurement Equipment
- Radar Systems
- SatCom Systems
- Harmonic Suppression

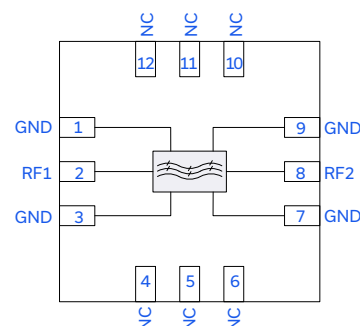FUNCTIONAL DIAGRAM**PRODUCT OVERVIEW**

Mini-Circuits' XLF-272M+ reflectionless filter employs a novel filter topology which absorbs and terminates stopband signals internally rather than reflecting them back to the source. This new capability enables unique applications for filter circuits beyond the traditional approaches. Traditional filters are reflective in the stopband, sending signals back to the source at 100% of the power level. These reflections interact with neighboring components and often result in intermodulation products and other interferences. Reflectionless filters eliminate stopband reflections, allowing them to be paired with sensitive devices and used in applications that otherwise require circuits such as isolation amplifiers or attenuators.

KEY FEATURES

Features	Advantages
Reflectionless Technology	Reflectionless filters absorb unwanted signals, preventing reflections back to the source. This reduces generation of additional unwanted signals without the need for extra components like attenuators, improving system dynamic range and saving board space.
50Ω Match in Stopband	Reflectionless filters maintain good impedance matching in the stopband, allowing for integration with high gain, wideband amplifiers without the risk of creating out of band instabilities.
Excellent RF Performance Repeatability	Fabricated on a GaAs process, X-series filters are inherently repeatable for large volume production.
Excellent Temperature Stability and Robustness	With ± 0.3 dB variation over temperature, the XLF-272M+ is ideal for use in wide temperature range applications without the need for additional temperature compensation. Up to +105°C rating allows for sustained operation close to high power components.
Excellent Power Handling in a Compact Package • Passband +37 dBm at +25°C • Stopband +29 dBm at +25°C	High power handling extends the usability of these filters to the transmit path for inter-stage filtering. A compact 3x3 mm 12-Lead QFN-style package enables replacement of filter/ attenuator pairs with a single reflectionless filter, saving board space in dense assemblies.



MMIC SURFACE MOUNT

Low Pass Filter

XLF-272M+


50Ω DC to 2700 MHz Reflectionless

ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC-2.7		1.2	2.7	dB
	Frequency Cut-Off	F2	2.9		3.0		dB
	Return Loss	DC-F1	DC-2.7		20.0		dB
Stopband	Rejection	F3-F4	4-6	21	28		dB
		F4-F5	6-10		39		
		F5-F6	10-20		26		
	Return Loss	F3-F4	4-6		20.0		dB
		F4-F5	6-10		18.0		
		F5-F6	10-20		13.7		

1. Tested on Mini-Circuits Characterization Test Board TB-XLF-272MC+. See Figure 2. De-embedded to the device reference plane.
2. Bi-directional RF1 and RF2 ports can be interchanged. See S-Parameters for actual performance.
3. All electrical specifications measured at RF Input Power = -10 dBm.

TYPICAL FREQUENCY RESPONSE AT +25°C

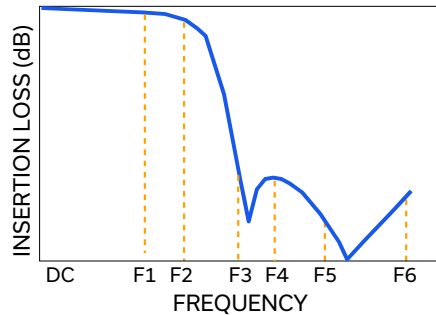



MMIC SURFACE MOUNT







Low Pass Filter

XLF-272M+

Mini-Circuits

50Ω DC to 2700 MHz Reflectionless

TYPICAL PERFORMANCE GRAPHS

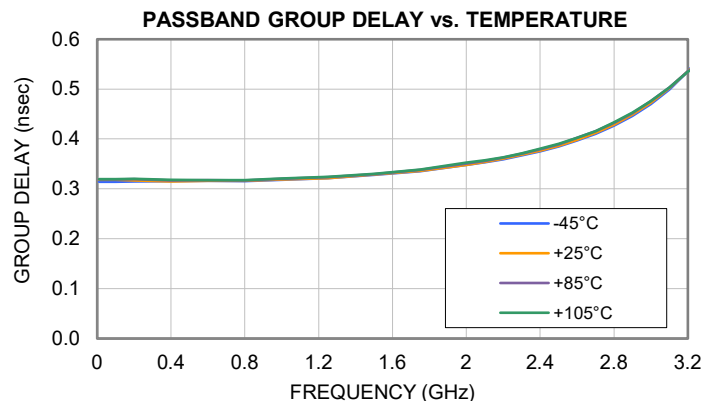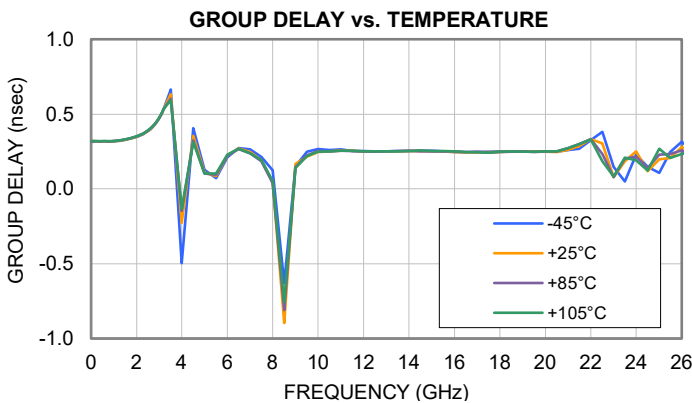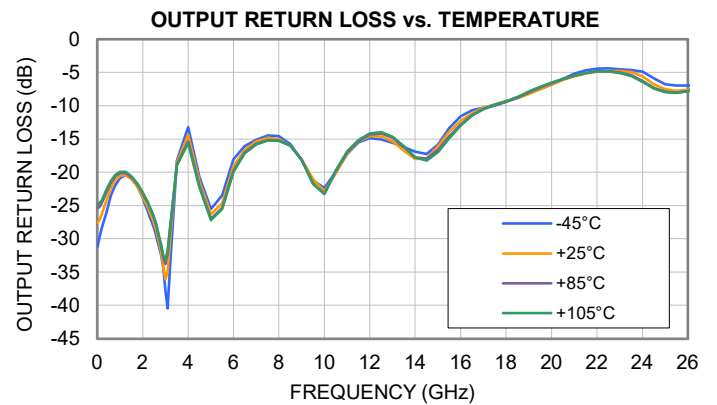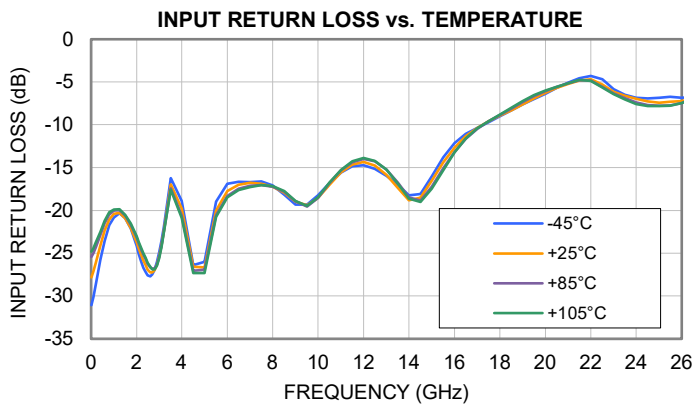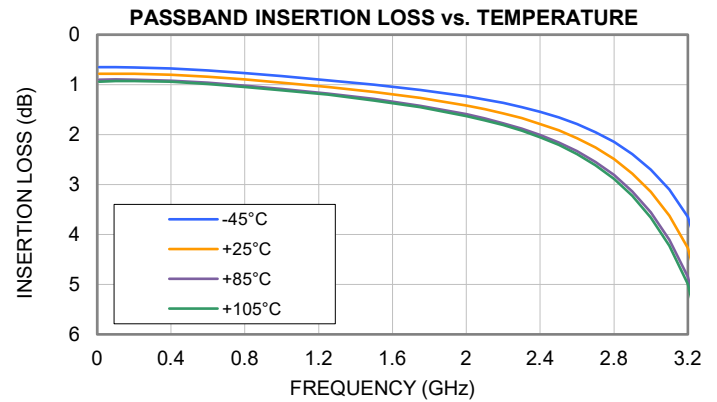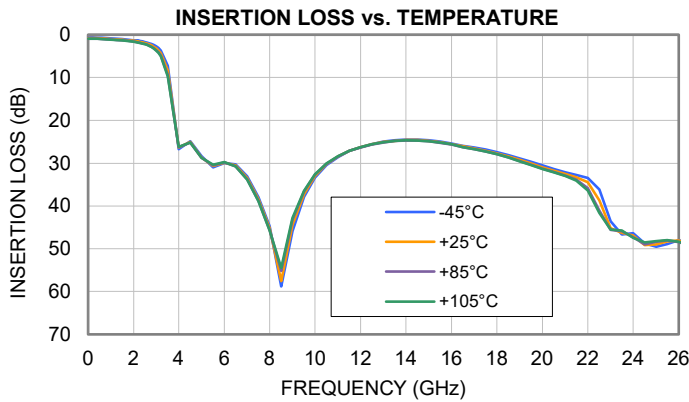

Mini-Circuits

ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-45°C to +105°C
Storage Temperature	-65°C to +150°C
Input Power, Passband (DC to F2) ⁵	+37 dBm
Input Power, Stopband (F3 to F6) ⁶	+29 dBm

4. Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.

5. Power rating above +25°C operating temperature decreases linearly to +34 dBm at +105°C.

6. Power rating above +25°C operating temperature decreases linearly to +26 dBm at +105°C.

THERMAL RESISTANCE

Parameter	Ratings
Thermal Resistance (Θ_{JC}) ^{7,8}	6.7°C/W

7. Θ_{JC} = (Hot Spot Temperature on Die - Temperature at Ground Lead)/Dissipated Power

8. Measured at 1 GHz with RF Input Power equal to 1 W.

ESD RATING

	Class	Voltage Range	Reference Standard
HBM	1A	250 V to <500 V	ANSI/ESDA/JEDEC JS-001-2017
CDM	C2	500 V to < 1000 V	JESD22-C101F



ESD HANDLING PRECAUTION: This device is designed to be Class 1A for HBM. Static charges may easily produce potentials higher than this with improper handling and can discharge into DUT and damage it. As a preventive measure Industry standard ESD handling precautions should be used at all times to protect the device from ESD damage.

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020E/JEDEC J-STD-033C



MMIC SURFACE MOUNT

Low Pass Filter

XLF-272M+

50Ω DC to 2700 MHz Reflectionless

FUNCTIONAL DIAGRAM

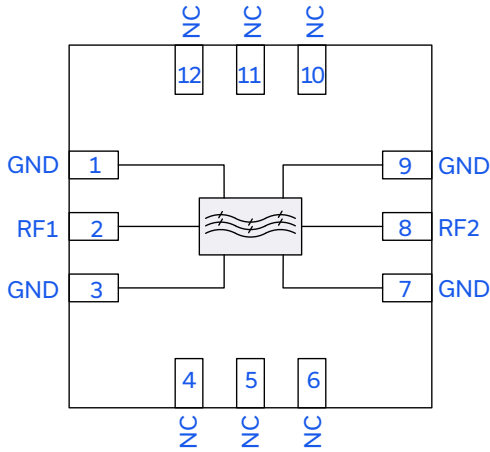


Figure 1. XLF-272M+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description (Refer to Figure 2)
RF1	2	RF1 Pad connects to RF-Input port.
RF2	8	RF2 Pad connects to RF-Output port.
GND	1, 3, 7, 9, & Paddle	Connects to Ground.
NC	4-6, 10-12	Not used internally.

CHARACTERIZATION TEST BOARD

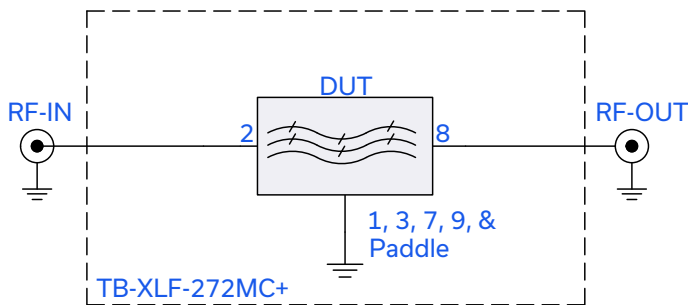


Figure 2. DUT soldered on Mini-Circuits Characterization Test Board TB-XLF-272MC+

Electrical Parameters and Conditions

Passband Insertion Loss, Stopband Rejection, and Return Loss measured using N5242A PNA-X Microwave Network Analyzer.

Conditions:

1. RF Input Power = -10 dBm
2. XLF-272M+ is bi-directional. RF1 and RF2 are interchangeable.



MMIC SURFACE MOUNT


Low Pass Filter

XLF-272M+

Mini-Circuits

50Ω DC to 2700 MHz Reflectionless


CASE STYLE DRAWING

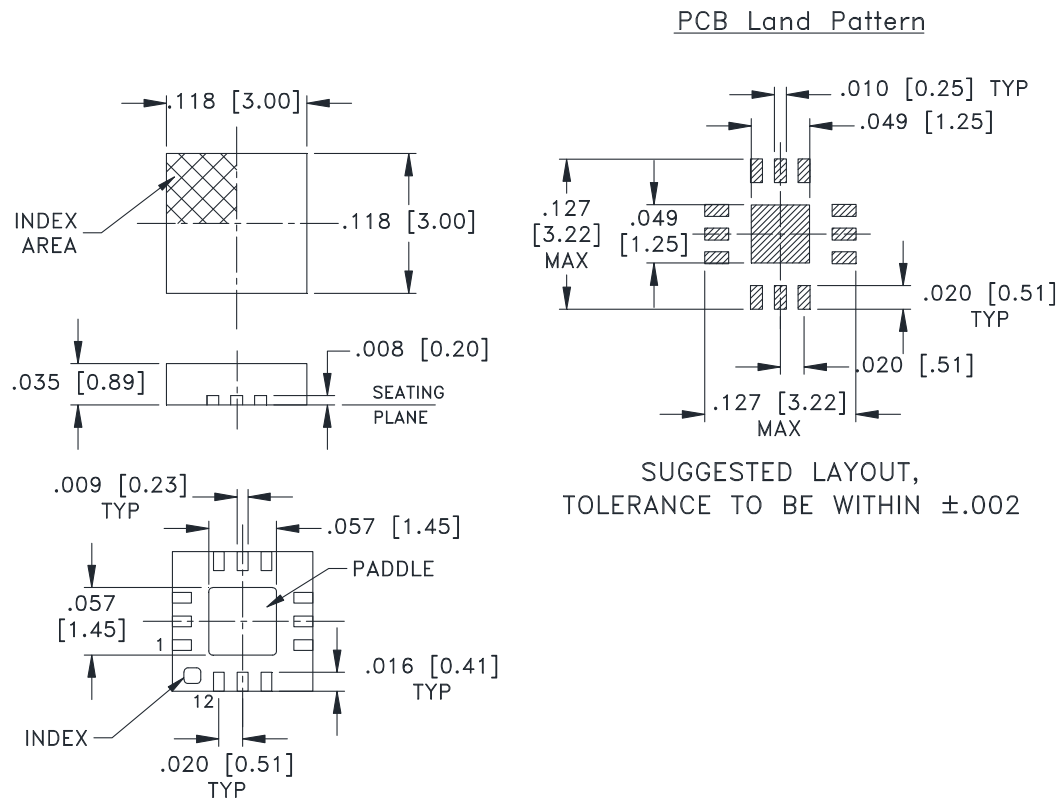

Weight: .02 Grams

Dimensions are in inches [mm]. Tolerances in inches: 2 Pl. $\pm.01$; 3 Pl. $\pm.004$

PRODUCT MARKING

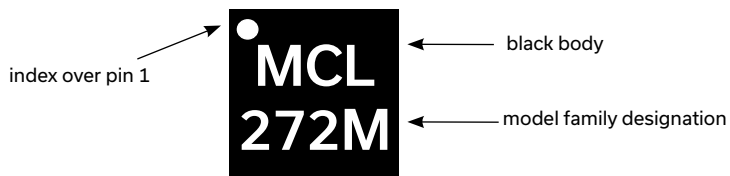

Marking may contain other features or characters for internal lot control

Mini-Circuits



Mini-Circuits

MMIC SURFACE MOUNT

Low Pass Filter

XLF-272M+

50Ω DC to 2700 MHz Reflectionless

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DQ1225. Plastic package, exposed paddle, Lead Finish: Matte-Tin
RoHS Status	Compliant
Tape & Reel Standard quantities available on reel	F66 7" reels with 20, 50, 100, 200, 500 or 1K devices
Suggested Layout for PCB Design	PL-766
Evaluation Board	TB-XLF-272MC+
	Gerber File
Environmental Ratings	ENV82

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = S11 (dB)

Insertion Loss = -S21 (dB)

Output Return Loss = S22 (dB)

TEST CONDITION: Temperature = +25°C

FREQ	Insertion Loss	Input Return Loss	Output Return Loss	Group Delay
(GHz)	(dB)	(dB)	(dB)	(nsec)
0.01	0.78	-27.8	-27.6	0.32
0.10	0.78	-27.1	-27.1	0.32
0.20	0.78	-26.2	-26.3	0.32
0.40	0.80	-24.1	-24.2	0.32
0.60	0.84	-22.3	-22.4	0.32
0.80	0.89	-21.1	-21.2	0.32
1.00	0.96	-20.4	-20.5	0.32
1.25	1.04	-20.3	-20.4	0.32
1.50	1.14	-20.9	-21.0	0.33
1.75	1.26	-22.1	-22.1	0.34
2.00	1.42	-23.7	-23.7	0.35
2.10	1.49	-24.4	-24.4	0.35
2.20	1.57	-25.2	-25.1	0.36
2.30	1.67	-25.9	-25.9	0.37
2.40	1.78	-26.4	-26.7	0.38
2.50	1.91	-26.9	-27.7	0.39
2.60	2.07	-27.3	-28.8	0.40
2.70	2.26	-27.3	-30.2	0.41
2.80	2.49	-27.0	-31.9	0.43
2.90	2.78	-26.3	-34.1	0.45
3.00	3.15	-25.4	-36.1	0.47
3.10	3.63	-24.1	-34.9	0.50
3.20	4.28	-22.4	-30.4	0.54
3.50	8.40	-17.0	-18.6	0.63
4.00	26.31	-19.8	-14.4	-0.23
4.50	25.05	-26.6	-21.4	0.35
5.00	28.59	-26.7	-26.3	0.11
5.50	30.69	-20.0	-24.6	0.08
6.00	29.89	-17.7	-19.1	0.22
6.50	30.51	-17.0	-16.6	0.27
7.00	33.45	-16.8	-15.3	0.25
7.50	38.40	-16.9	-14.8	0.19
8.00	45.24	-17.2	-15.0	0.05
8.50	57.57	-17.9	-16.0	-0.90
9.00	44.47	-19.0	-18.1	0.17
9.50	37.20	-19.4	-21.1	0.22
10.00	32.99	-18.6	-22.8	0.24
10.50	30.25	-17.0	-20.2	0.25
11.00	28.43	-15.5	-17.2	0.26
11.50	27.16	-14.6	-15.4	0.26
12.00	26.24	-14.4	-14.6	0.25
12.50	25.56	-14.8	-14.6	0.25
13.00	25.06	-15.8	-15.4	0.25
13.50	24.72	-17.4	-16.7	0.25
14.00	24.56	-18.8	-18.0	0.25
14.50	24.58	-18.5	-17.9	0.25
15.00	24.79	-16.5	-16.1	0.25
15.50	25.12	-14.4	-13.9	0.25
16.00	25.55	-12.7	-12.3	0.25
16.50	26.05	-11.3	-11.1	0.24
17.00	26.58	-10.4	-10.3	0.24
17.50	27.13	-9.6	-9.8	0.25
18.00	27.73	-8.9	-9.3	0.25
18.50	28.42	-8.3	-8.9	0.25
19.00	29.17	-7.6	-8.2	0.25
19.50	30.03	-6.9	-7.5	0.25
20.00	30.91	-6.3	-6.8	0.25
20.50	31.73	-5.7	-6.1	0.25
21.00	32.48	-5.2	-5.5	0.26
21.50	33.24	-4.8	-5.1	0.29
22.00	34.49	-4.7	-4.9	0.33
22.50	38.68	-5.3	-4.8	0.30
23.00	45.22	-6.2	-4.8	0.08
23.50	46.27	-6.6	-4.9	0.19
24.00	46.93	-7.0	-5.5	0.25
24.50	49.14	-7.3	-6.7	0.12
25.00	49.03	-7.4	-7.5	0.20
25.50	48.34	-7.3	-7.7	0.21
26.00	48.07	-7.3	-7.6	0.28
26.50	49.00	-7.0	-7.3	0.24

Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = S11 (dB)

Insertion Loss = -S21 (dB)

Output Return Loss = S22 (dB)

TEST CONDITION: Temperature = -45°C

FREQ	Insertion Loss	Input Return Loss	Output Return Loss	Group Delay
(GHz)	(dB)	(dB)	(dB)	(nsec)
0.01	0.65	-31.1	-31.1	0.31
0.10	0.65	-30.1	-29.8	0.31
0.20	0.65	-28.7	-28.3	0.32
0.40	0.68	-25.8	-26.0	0.32
0.60	0.71	-23.6	-23.5	0.32
0.80	0.77	-21.7	-21.9	0.32
1.00	0.83	-20.8	-20.9	0.32
1.25	0.91	-20.3	-20.4	0.32
1.50	1.00	-20.9	-20.9	0.33
1.75	1.10	-22.1	-22.0	0.34
2.00	1.23	-24.2	-23.9	0.35
2.10	1.29	-25.1	-24.7	0.35
2.20	1.36	-25.9	-25.7	0.36
2.30	1.45	-26.7	-26.6	0.37
2.40	1.54	-27.2	-27.5	0.38
2.50	1.66	-27.6	-28.4	0.39
2.60	1.79	-27.7	-29.6	0.40
2.70	1.95	-27.5	-30.9	0.41
2.80	2.15	-26.9	-32.3	0.43
2.90	2.39	-26.1	-34.5	0.45
3.00	2.70	-24.9	-37.6	0.47
3.10	3.10	-23.5	-40.4	0.50
3.20	3.65	-21.9	-34.3	0.54
3.50	7.21	-16.2	-18.3	0.66
4.00	26.73	-18.9	-13.2	-0.50
4.50	24.92	-26.4	-20.7	0.40
5.00	28.34	-26.0	-25.5	0.13
5.50	30.96	-19.0	-23.5	0.07
6.00	29.99	-16.9	-18.0	0.21
6.50	30.30	-16.7	-16.0	0.27
7.00	33.05	-16.7	-15.1	0.26
7.50	37.92	-16.6	-14.5	0.21
8.00	44.74	-17.1	-14.6	0.12
8.50	58.78	-18.2	-15.7	-0.63
9.00	45.82	-19.3	-18.1	0.15
9.50	37.80	-19.3	-21.2	0.25
10.00	33.32	-18.3	-22.4	0.27
10.50	30.45	-16.8	-19.9	0.26
11.00	28.53	-15.6	-17.2	0.26
11.50	27.18	-14.8	-15.5	0.25
12.00	26.20	-14.7	-14.9	0.25
12.50	25.50	-15.2	-15.1	0.25
13.00	24.99	-16.0	-15.6	0.25
13.50	24.64	-17.0	-16.2	0.25
14.00	24.46	-18.2	-16.9	0.25
14.50	24.45	-18.1	-17.2	0.26
15.00	24.63	-16.1	-15.8	0.25
15.50	24.96	-13.8	-13.4	0.25
16.00	25.41	-12.1	-11.6	0.25
16.50	25.96	-11.1	-10.7	0.24
17.00	26.33	-10.3	-10.3	0.25
17.50	26.83	-9.7	-10.0	0.25
18.00	27.42	-9.0	-9.4	0.25
18.50	28.11	-8.3	-8.7	0.25
19.00	28.88	-7.6	-8.0	0.25
19.50	29.70	-7.0	-7.5	0.25
20.00	30.54	-6.4	-6.8	0.25
20.50	31.39	-5.7	-6.0	0.25
21.00	32.15	-5.1	-5.2	0.26
21.50	32.80	-4.6	-4.6	0.27
22.00	33.47	-4.3	-4.4	0.33
22.50	36.18	-4.7	-4.4	0.38
23.00	43.60	-5.9	-4.5	0.15
23.50	46.71	-6.5	-4.6	0.05
24.00	46.34	-6.8	-4.9	0.23
24.50	48.72	-6.9	-5.9	0.15
25.00	49.49	-6.9	-6.7	0.11
25.50	48.84	-6.7	-7.0	0.25
26.00	47.94	-6.9	-7.0	0.31
26.50	48.90	-6.7	-6.9	0.25

Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = S11 (dB)

Insertion Loss = -S21 (dB)

Output Return Loss = S22 (dB)

TEST CONDITION: Temperature = +85°C

FREQ	Insertion Loss	Input Return Loss	Output Return Loss	Group Delay
(GHz)	(dB)	(dB)	(dB)	(nsec)
0.01	0.90	-25.4	-25.4	0.32
0.10	0.90	-25.0	-25.2	0.32
0.20	0.90	-24.4	-24.6	0.32
0.40	0.92	-22.9	-23.0	0.32
0.60	0.96	-21.5	-21.6	0.32
0.80	1.02	-20.5	-20.6	0.32
1.00	1.08	-20.0	-20.1	0.32
1.25	1.18	-20.0	-20.1	0.32
1.50	1.29	-20.6	-20.7	0.33
1.75	1.42	-21.7	-21.8	0.34
2.00	1.59	-23.2	-23.2	0.35
2.10	1.67	-23.9	-23.8	0.36
2.20	1.77	-24.5	-24.5	0.36
2.30	1.88	-25.2	-25.2	0.37
2.40	2.01	-25.7	-26.0	0.38
2.50	2.16	-26.3	-26.9	0.39
2.60	2.34	-26.7	-28.0	0.40
2.70	2.55	-26.9	-29.3	0.42
2.80	2.81	-26.8	-31.0	0.43
2.90	3.14	-26.3	-32.8	0.45
3.00	3.56	-25.4	-33.8	0.48
3.10	4.10	-24.1	-32.2	0.50
3.20	4.84	-22.5	-28.8	0.54
3.50	9.40	-17.4	-18.8	0.60
4.00	26.20	-20.6	-15.3	-0.15
4.50	25.18	-27.1	-22.1	0.32
5.00	28.76	-27.0	-27.0	0.10
5.50	30.50	-20.6	-25.3	0.09
6.00	29.83	-18.3	-19.8	0.22
6.50	30.71	-17.5	-17.0	0.27
7.00	33.78	-17.1	-15.7	0.24
7.50	38.78	-17.1	-15.2	0.18
8.00	45.67	-17.2	-15.2	0.04
8.50	55.13	-17.8	-16.0	-0.81
9.00	43.24	-18.9	-18.1	0.15
9.50	36.67	-19.6	-21.7	0.22
10.00	32.71	-18.6	-23.2	0.25
10.50	30.11	-16.8	-19.8	0.25
11.00	28.38	-15.3	-17.0	0.26
11.50	27.15	-14.4	-15.3	0.25
12.00	26.29	-14.0	-14.3	0.25
12.50	25.65	-14.3	-14.2	0.25
13.00	25.17	-15.2	-14.8	0.25
13.50	24.82	-16.8	-16.2	0.25
14.00	24.67	-18.5	-17.7	0.26
14.50	24.70	-18.8	-18.0	0.25
15.00	24.89	-17.2	-16.6	0.25
15.50	25.21	-15.1	-14.6	0.25
16.00	25.64	-13.2	-12.8	0.25
16.50	26.26	-11.7	-11.4	0.25
17.00	26.71	-10.5	-10.5	0.25
17.50	27.29	-9.6	-9.9	0.24
18.00	27.93	-8.9	-9.4	0.25
18.50	28.67	-8.1	-8.8	0.25
19.00	29.50	-7.3	-8.0	0.25
19.50	30.40	-6.6	-7.3	0.25
20.00	31.30	-6.0	-6.6	0.25
20.50	32.10	-5.6	-6.0	0.25
21.00	32.91	-5.1	-5.5	0.27
21.50	33.86	-4.8	-5.1	0.30
22.00	35.88	-4.8	-4.8	0.33
22.50	41.07	-5.6	-4.8	0.23
23.00	45.58	-6.3	-5.0	0.08
23.50	45.93	-6.9	-5.4	0.20
24.00	47.28	-7.4	-6.3	0.22
24.50	48.96	-7.7	-7.3	0.14
25.00	48.38	-7.8	-7.9	0.23
25.50	48.03	-7.7	-8.0	0.23
26.00	48.46	-7.4	-7.8	0.26
26.50	49.32	-7.0	-7.3	0.22

Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = S11 (dB)







Insertion Loss = -S21 (dB)

Output Return Loss = S22 (dB)


TEST CONDITION: Temperature = +105°C

FREQ	Insertion Loss	Input Return Loss	Output Return Loss	Group Delay
(GHz)	(dB)	(dB)	(dB)	(nsec)
0.01	0.94	-24.8	-24.9	0.32
0.10	0.93	-24.5	-24.6	0.32
0.20	0.93	-23.8	-24.2	0.32
0.40	0.94	-22.6	-22.6	0.32
0.60	0.98	-21.2	-21.3	0.32
0.80	1.04	-20.2	-20.3	0.32
1.00	1.11	-19.9	-20.0	0.32
1.25	1.20	-19.9	-20.0	0.32
1.50	1.31	-20.5	-20.6	0.33
1.75	1.45	-21.5	-21.7	0.34
2.00	1.63	-23.0	-23.1	0.35
2.10	1.71	-23.7	-23.7	0.36
2.20	1.81	-24.4	-24.4	0.36
2.30	1.92	-25.0	-25.1	0.37
2.40	2.05	-25.5	-25.9	0.38
2.50	2.21	-26.1	-26.8	0.39
2.60	2.39	-26.6	-27.9	0.40
2.70	2.61	-26.9	-29.2	0.42
2.80	2.89	-26.9	-30.8	0.43
2.90	3.22	-26.5	-32.5	0.45
3.00	3.66	-25.6	-33.2	0.48
3.10	4.23	-24.3	-31.7	0.50
3.20	4.99	-22.6	-28.5	0.53
3.50	9.68	-17.6	-18.9	0.59
4.00	26.17	-20.9	-15.6	-0.14
4.50	25.21	-27.3	-22.2	0.31
5.00	28.75	-27.3	-27.2	0.10
5.50	30.40	-20.7	-25.5	0.10
6.00	29.77	-18.5	-20.0	0.23
6.50	30.72	-17.6	-17.2	0.27
7.00	33.85	-17.3	-15.8	0.24
7.50	38.86	-17.1	-15.2	0.19
8.00	45.74	-17.2	-15.2	0.05
8.50	54.47	-17.7	-16.0	-0.76
9.00	42.85	-18.9	-18.1	0.14
9.50	36.45	-19.5	-21.8	0.22
10.00	32.57	-18.5	-23.3	0.25
10.50	30.03	-16.7	-19.8	0.25
11.00	28.31	-15.3	-16.9	0.26
11.50	27.11	-14.3	-15.1	0.26
12.00	26.26	-13.9	-14.1	0.25
12.50	25.62	-14.2	-14.0	0.25
13.00	25.13	-15.2	-14.7	0.25
13.50	24.80	-16.9	-16.1	0.25
14.00	24.65	-18.7	-17.8	0.25
14.50	24.67	-19.0	-18.2	0.26
15.00	24.86	-17.5	-17.0	0.25
15.50	25.18	-15.3	-14.9	0.25
16.00	25.62	-13.2	-13.0	0.25
16.50	26.26	-11.6	-11.5	0.25
17.00	26.72	-10.4	-10.5	0.24
17.50	27.29	-9.6	-9.9	0.24
18.00	27.94	-8.8	-9.4	0.25
18.50	28.71	-8.0	-8.7	0.25
19.00	29.57	-7.2	-7.9	0.25
19.50	30.47	-6.5	-7.1	0.25
20.00	31.37	-6.0	-6.5	0.25
20.50	32.16	-5.5	-6.0	0.25
21.00	32.96	-5.1	-5.5	0.27
21.50	34.01	-4.8	-5.1	0.30
22.00	36.34	-4.9	-4.8	0.33
22.50	41.64	-5.6	-4.8	0.18
23.00	45.51	-6.4	-5.1	0.08
23.50	45.73	-7.0	-5.5	0.21
24.00	47.44	-7.6	-6.4	0.19
24.50	48.52	-7.8	-7.4	0.12
25.00	48.19	-7.8	-8.0	0.27
25.50	47.95	-7.8	-8.1	0.21
26.00	48.40	-7.5	-7.8	0.23
26.50	49.26	-6.9	-7.3	0.25


Typical Performance Curves

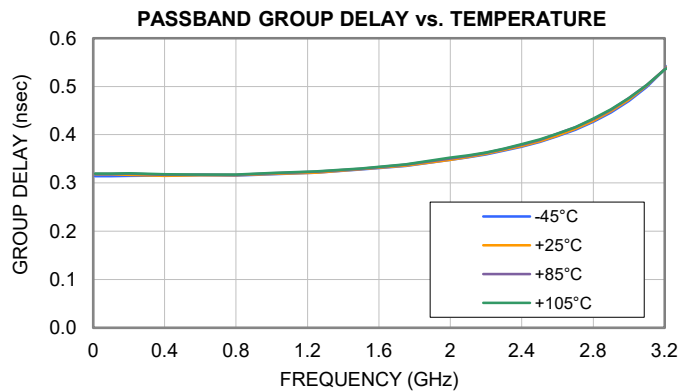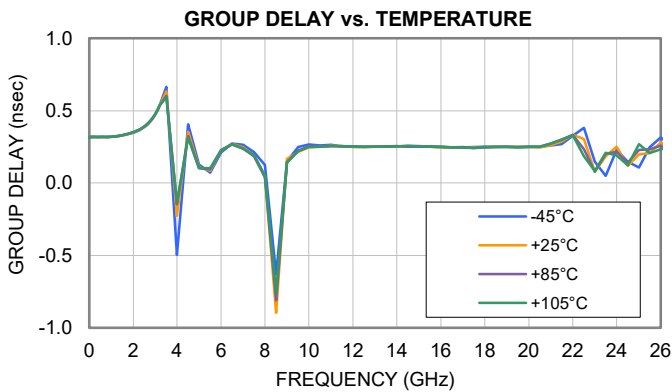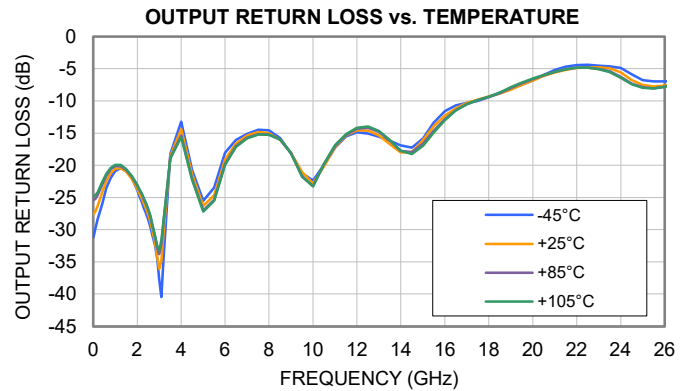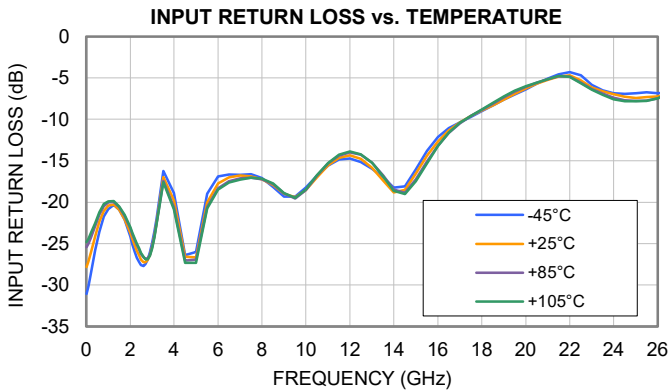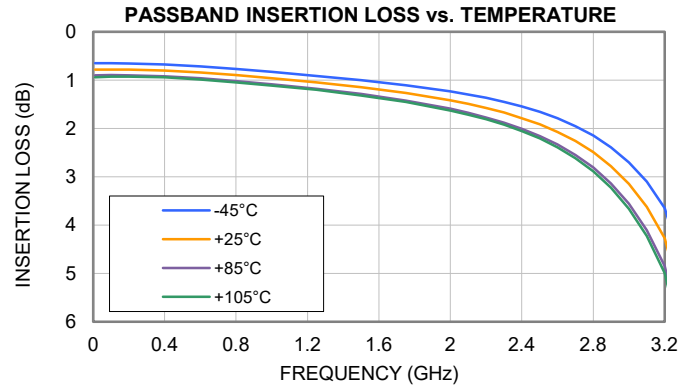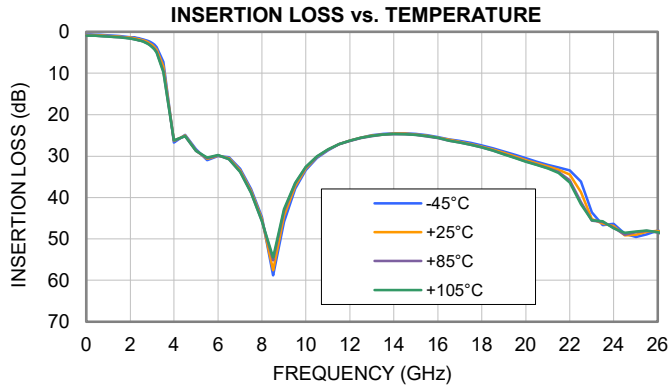

Outline Dimensions

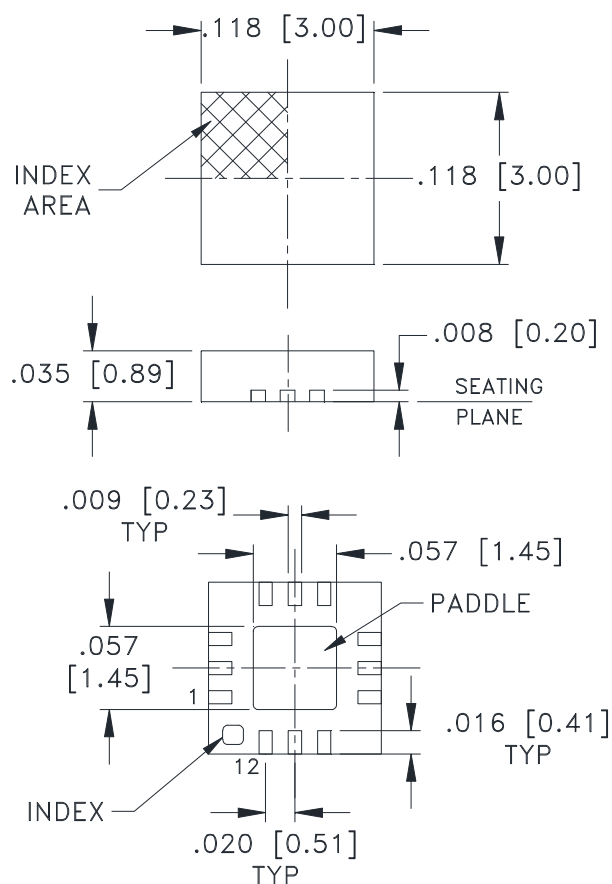

PCB Land Pattern

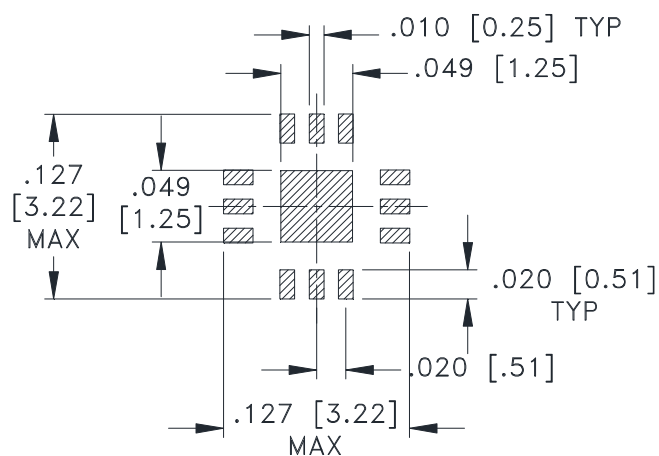

SUGGESTED LAYOUT,
TOLERANCE TO BE WITHIN $\pm .002$

Weight: .02 Grams

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .004$

Notes:

- Case material: Plastic.
- Termination finish:
 - For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin. All models, (+) suffix. See Data sheet.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Tape & Reel Packaging TR-F66

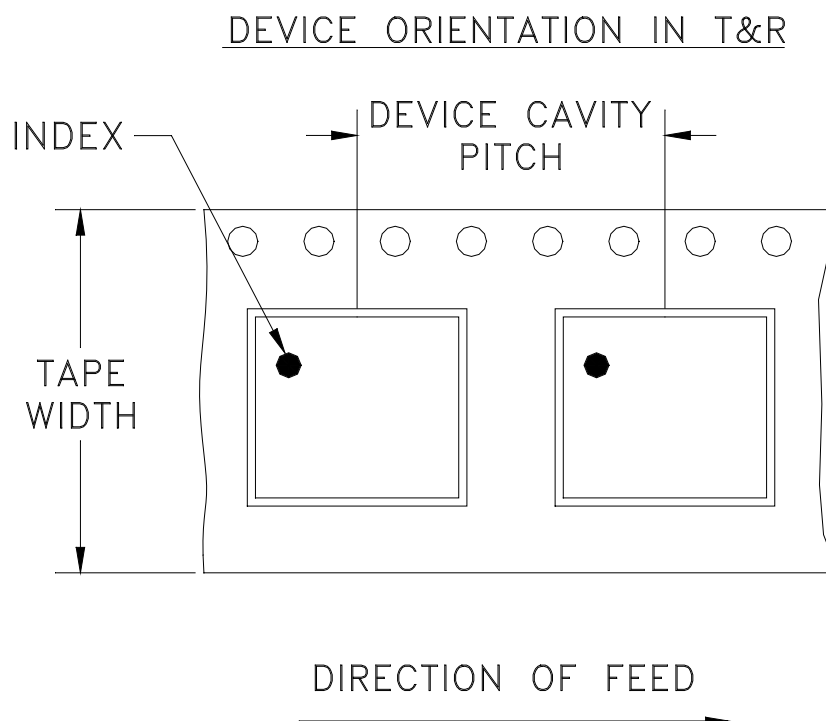

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
8	4	7	Small quantity standard	20
				50
				100
				200
				500
		7	Standard	1000, 2000, 3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010


Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-019660	NEW RELEASE	10/25/23	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR

DQ1225 CASE STYLE

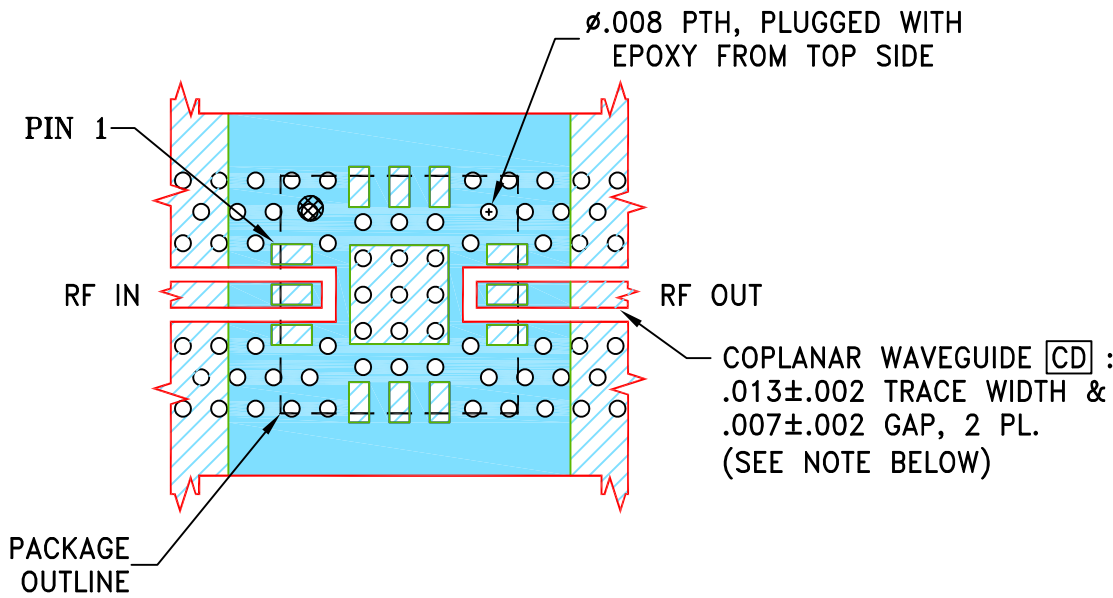

NOTES:

1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B, DIELECTRIC THICKNESS .0066"; COPPER: 1/2 OZ. EACH SIDE.

FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS		DATE			
DIMENSIONS ARE IN INCHES		DRAWN	ITG	10/25/23			
TOLERANCES ON:		CHECKED	GF	10/25/23			
2 PL DECIMALS ±		APPROVED	IL	10/25/23			
3 PL DECIMALS ± .005							
ANGLES ±							
FRACTIONS ±							

Mini-Circuits®

PL,DQ1225,TB-XLF-272MC+/272M+

SIZE A

CODE IDENT 15542

DRAWING NO: 98-PL-766

REV: OR

FILE: 98PL766

SCALE: 10:1

SHEET: 1 OF 1



13 Neptune Avenue

Brooklyn NY 11235

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

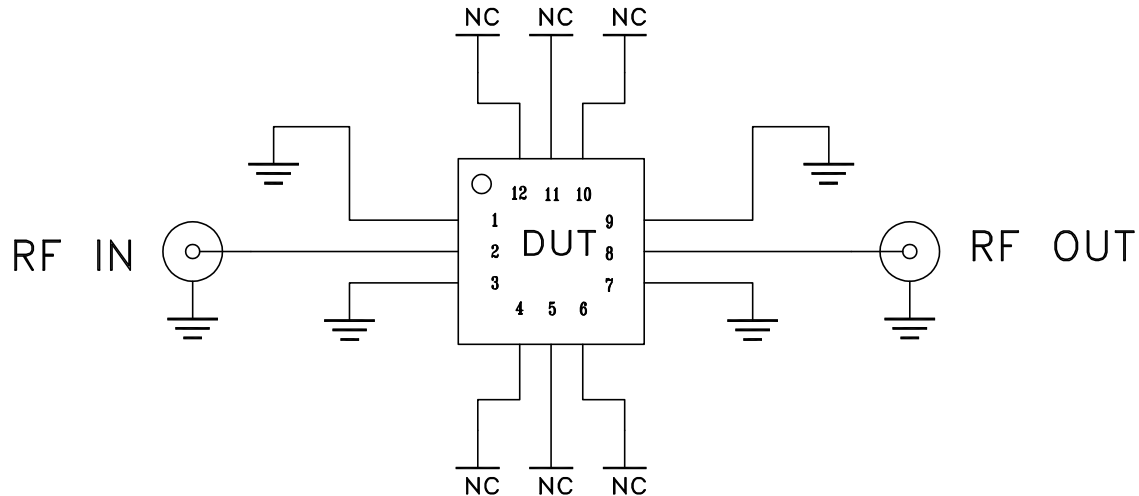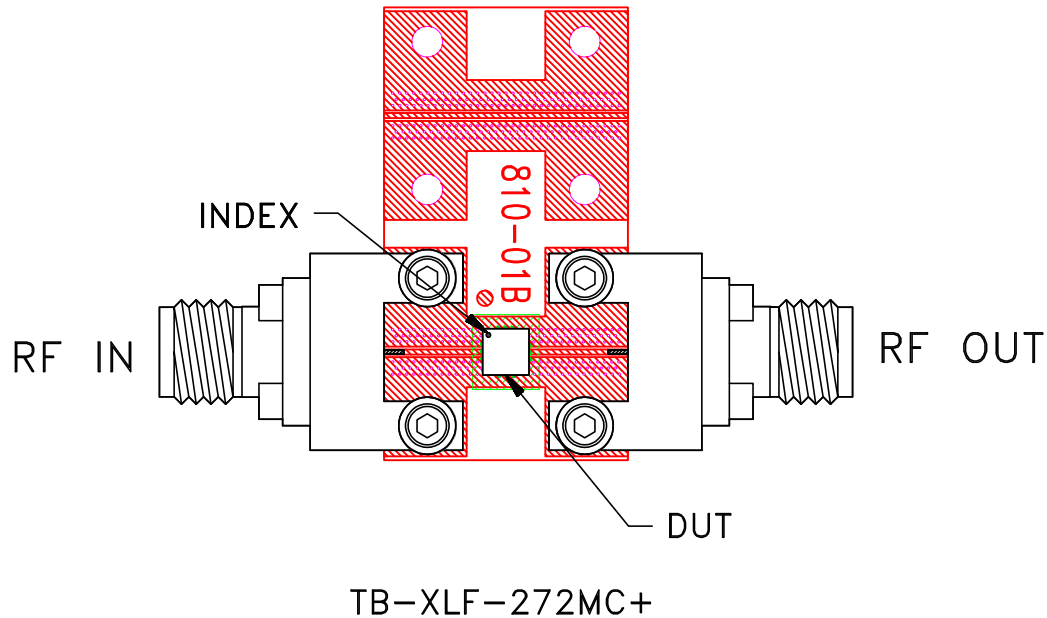

Schematic Diagram

Notes:

1. 50 Ohm 2.92 mm Female connectors.
2. PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.0066 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-65° to 150° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Temperature Cycling	-65° to 150°C, 100 cycles	JESD22-A104
Temperature Humidity	85°C/ 85% RH, 168 hours	JESD22-113
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 240°C peak (Non-RoHS) or 260°C (RoHS)	J-STD-020C
Solderability	10X magnification, 95% coverage	JESD22-B102, Method 1: Dip and Look Test
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215