



COAXIAL

Power Detector

ZV47-E673RMS+


50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

KEY FEATURES

- Ultra Wide Matched Input Freq. Range: 0.1 to 67 GHz
- 35 dB Linear Dynamic Range (< ±1 dB Error)
- Positive Output Voltage Slope, 0 to +1.2 V
- Low Supply Current: 34 mA at +3.3 V typical

*Generic photo used for illustration purposes only***APPLICATIONS**

- Test and Measurement
- RMS Power Detection of Complex Waveforms
- 4G, 5G and 6G Transmit Power Control
- Radar Systems

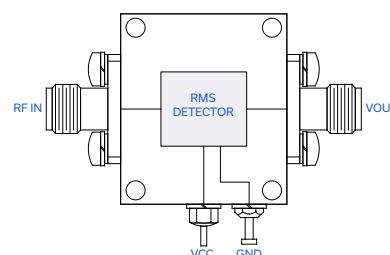FUNCTIONAL DIAGRAM**PRODUCT OVERVIEW**

Mini-Circuits' ZV47-E673RMS+ is a high-accuracy RMS power detector with an ultra-wide RF input bandwidth of 0.1 GHz to 67 GHz. The DC output voltage of the detector provides an accurate representation of the average signal power applied to the RF input. This device provides a linear-in-dB response with 29 mV/dB logarithmic slope over its 35 dB dynamic range with typically better than ±1 dB accuracy. It is housed in a compact, gold over nickel plated brass alloy case (0.84" x 0.96" x 0.37") with a 1.85 mm female connector on the RF input and a 2.92 mm female connector providing the detected output voltage.

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter		Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range			0.1		67	GHz
Dynamic Range at ±1 dB Error		0.1 - 67	-35 to 0			dBm
Output Voltage Range		0.1 - 67	0 to +1.2			V
Slope		0.1 - 67		+29		mV/dB
Return Loss		0.1 - 67		12		dB
Pulse Response Time	Rise	0.1 - 67		2.9		μsec
	Fall	0.1 - 67		8.1		μsec
DC Operating Conditions	Vcc	0.1 - 67	+2.7	+3.3	+3.6	V
	Current	0.1 - 67		34		mA

ABSOLUTE MAXIMUM RATINGS¹

Parameter	Ratings
Operating Case Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C
DC Supply Voltage	+3.8 V
DC Supply Current	38 mA
RF Input Power	+12 dBm

1. Permanent damage may occur if any of these limits are exceeded.







COAXIAL

Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

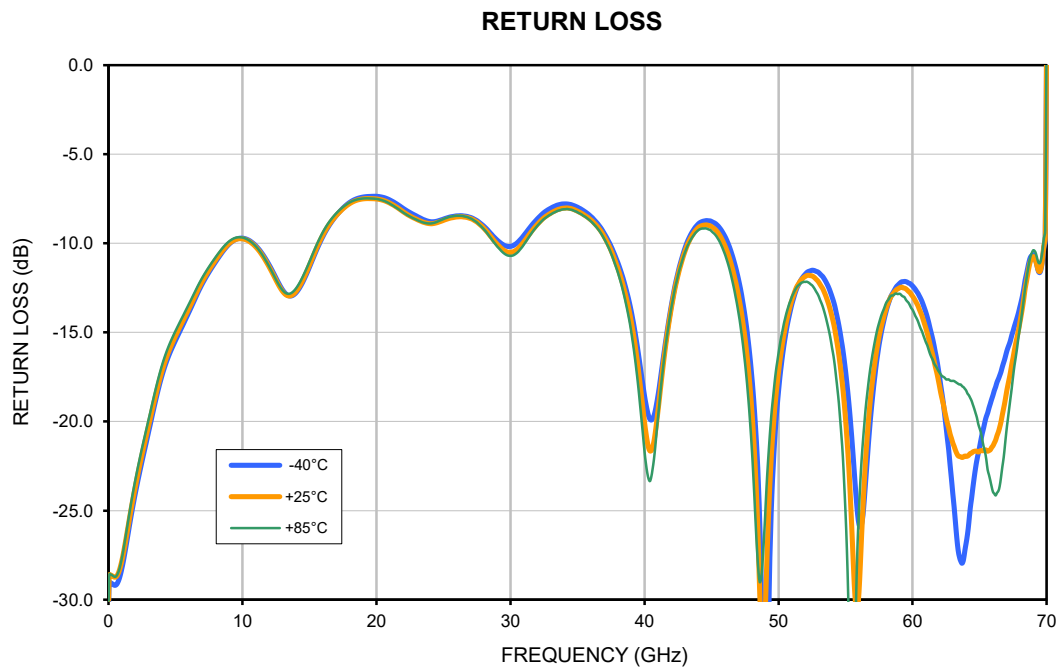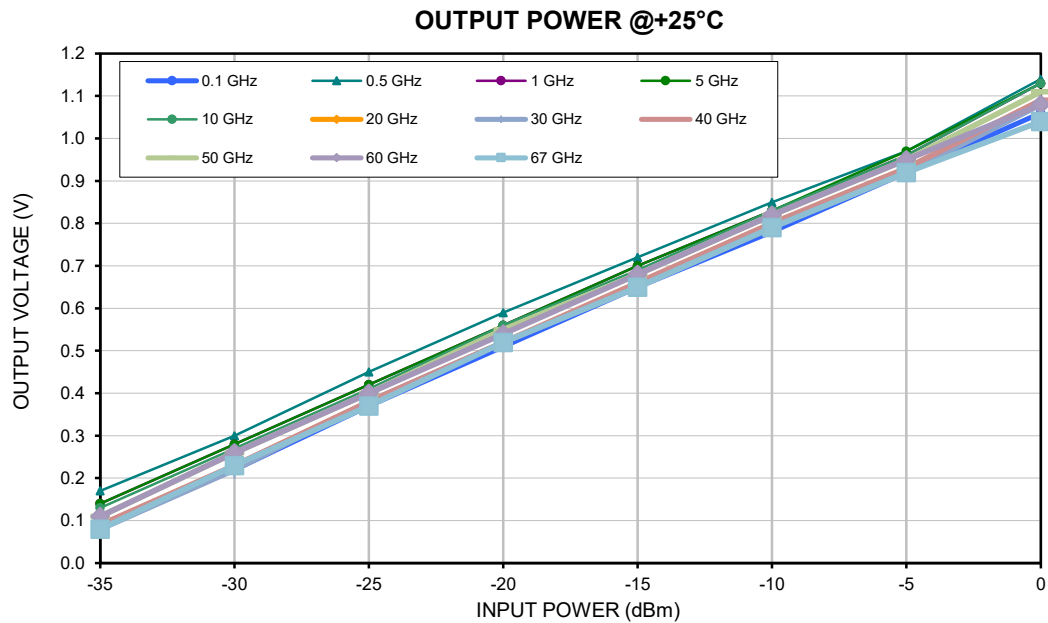



COAXIAL





Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

The following charts show measured output voltage as a function of input power at a fixed frequency (green), plotted alongside an ideal linear voltage curve (orange) for comparison. Also shown is the difference of measured and ideal voltage represented as an error in input power (blue).

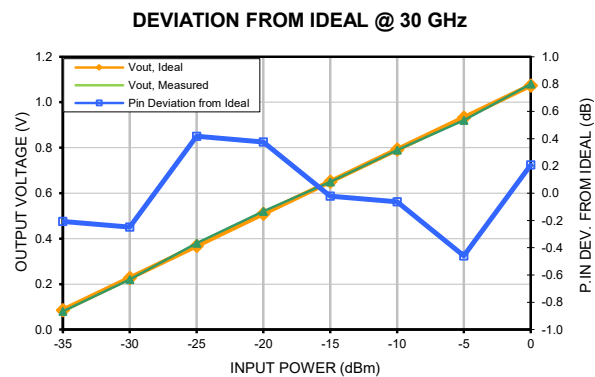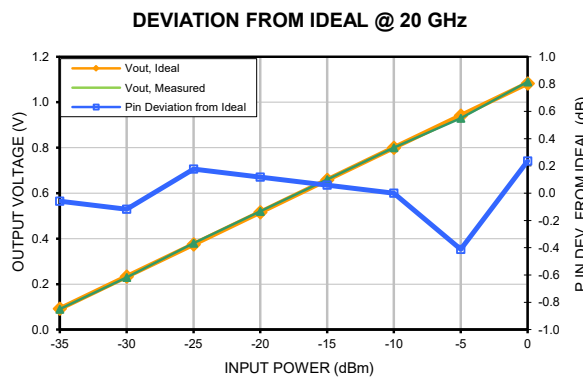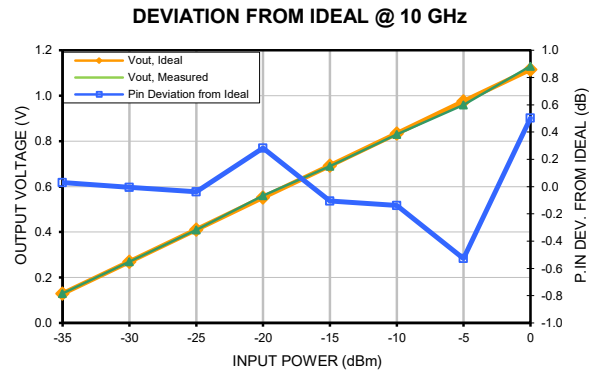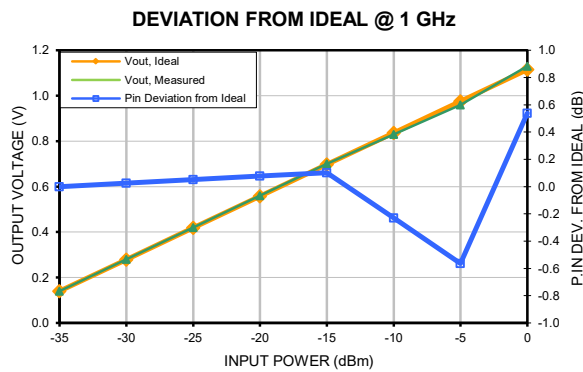



COAXIAL


Power Detector

ZV47-E673RMS+


50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS


DEVIATION FROM IDEAL @ 40 GHz

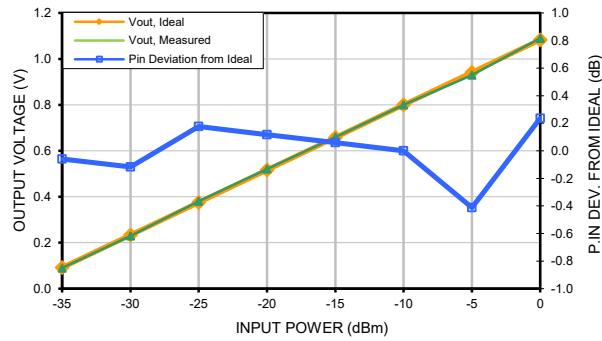


DEVIATION FROM IDEAL @ 50 GHz

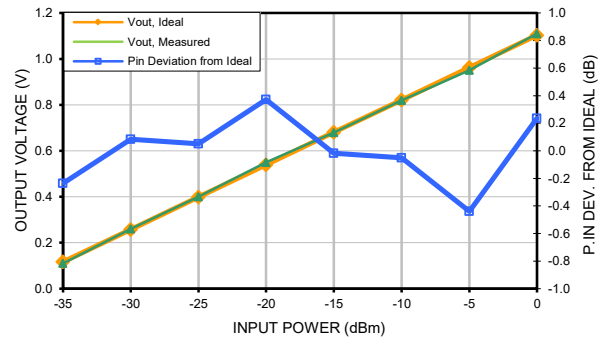

DEVIATION FROM IDEAL @ 60 GHz

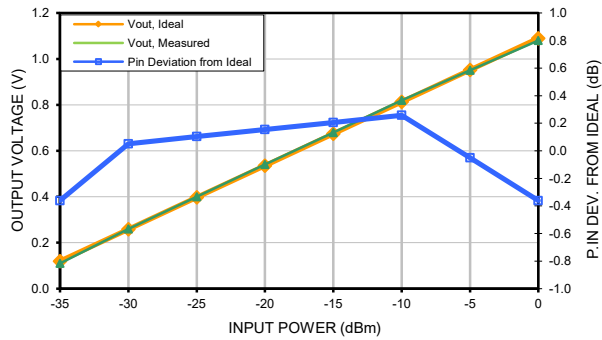

DEVIATION FROM IDEAL @ 67 GHz

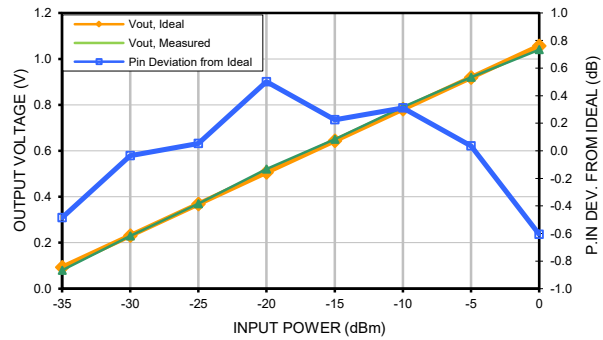



COAXIAL




Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

The following charts show measured output voltage at various temperatures as a function of frequency at a fixed input power.

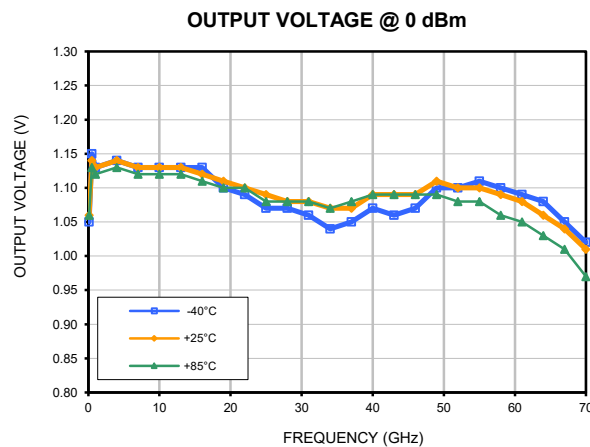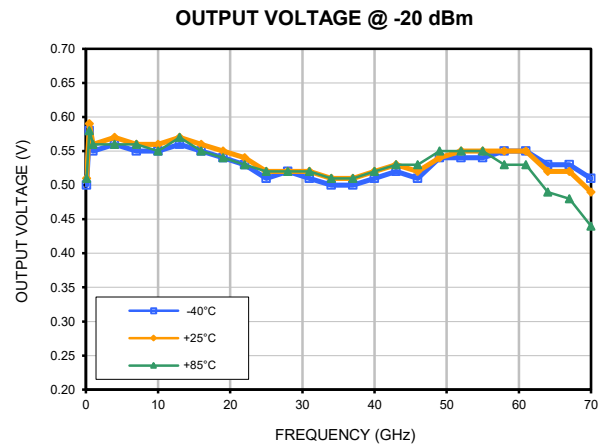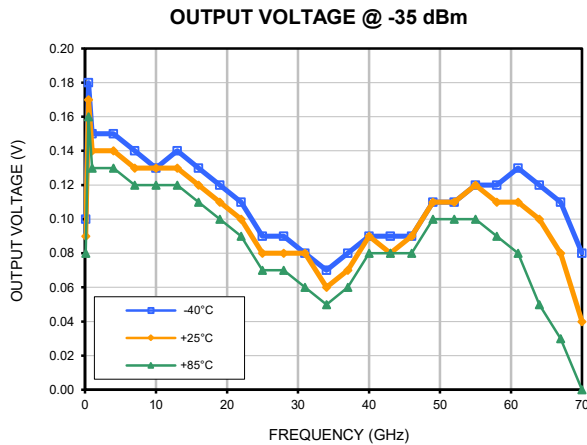



COAXIAL




Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

The following charts show output voltage slope at various temperatures as a function of input power at a fixed frequency. The output voltage slope at a given input power is obtained by using linear regression over the range from -35 dBm to 0 dBm.

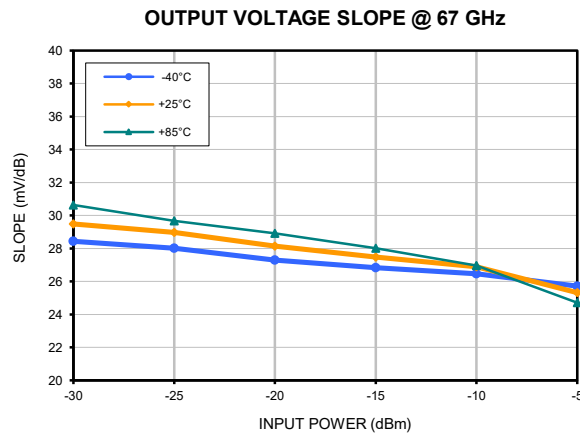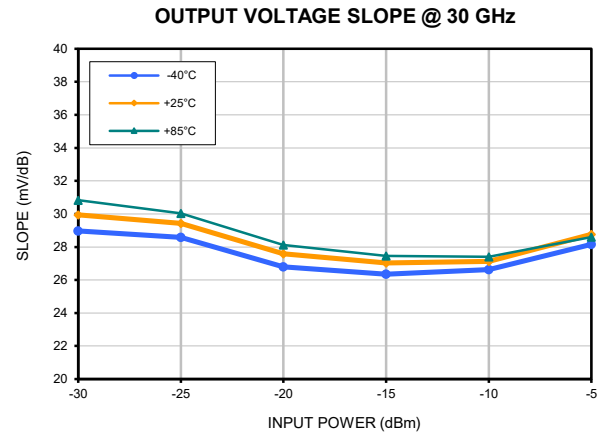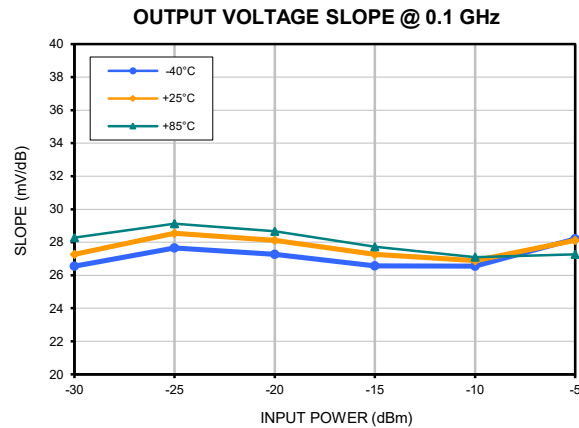



COAXIAL




Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

The following charts show output voltage slope at various temperatures as a function of frequency at a fixed input power. The output voltage slope at a given input power is obtained by using linear regression over the range from -35 dBm to 0 dBm.

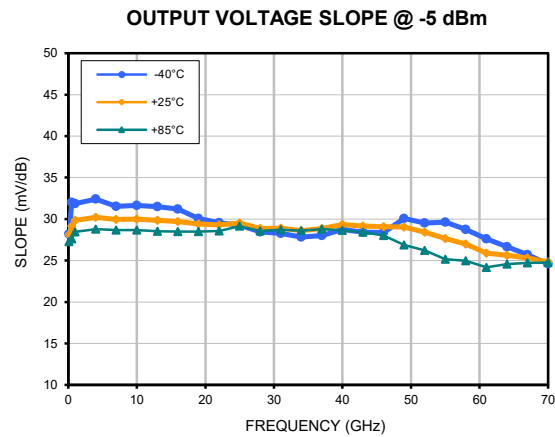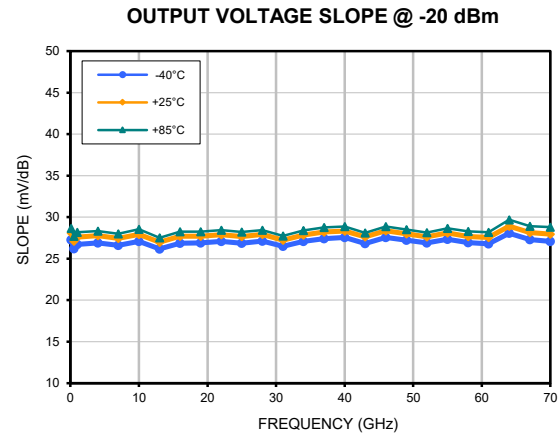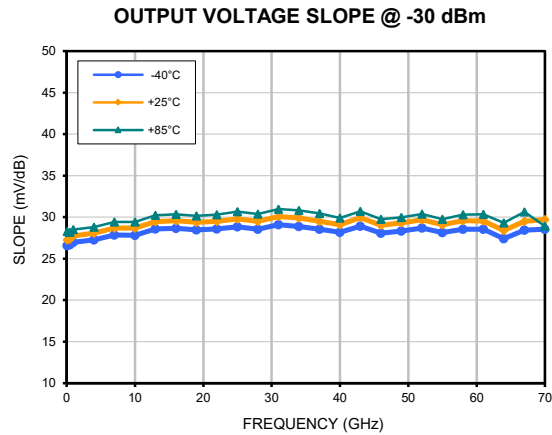



COAXIAL




Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS


The following charts show measured output voltage deviation at -40°C relative to +25°C (blue) and measured output voltage deviation at +85°C relative to +25°C (orange). Also shown is the measured output voltage measured at +25°C normalized (green) for comparison.

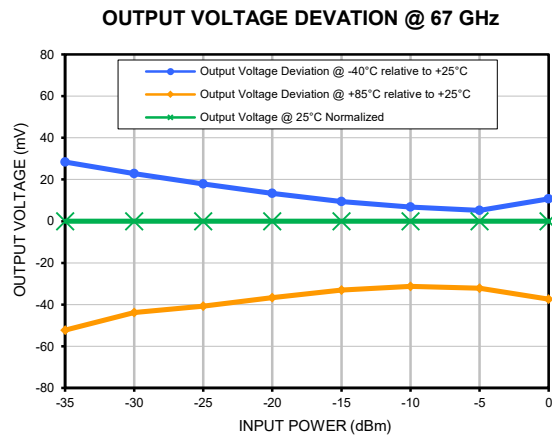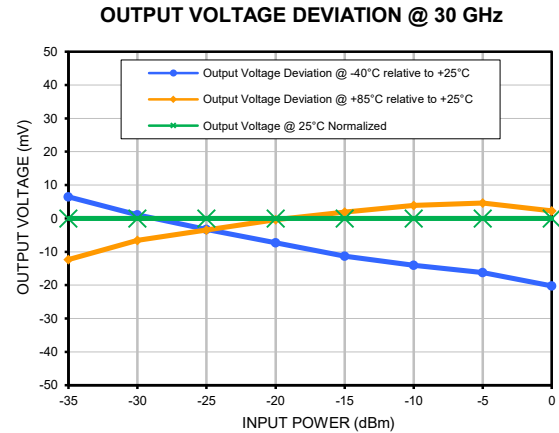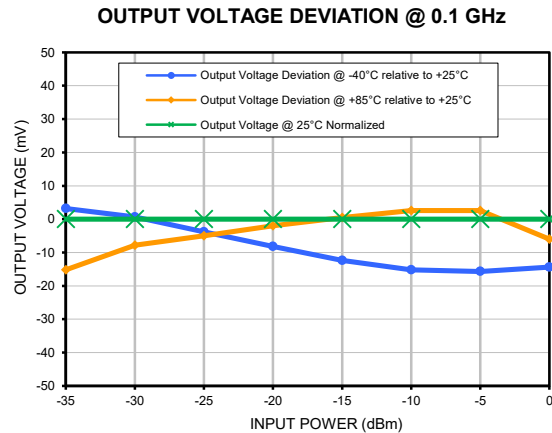

COAXIAL/PIN DESCRIPTION

Function	Marking on Unit	Connector
RF IN	RF IN	1.85 Female
VOUT	V_DET OUT	2.92 Female
Vcc (+3.3V)	VCC	-
GROUND	GND	-

CASE STYLE DRAWING

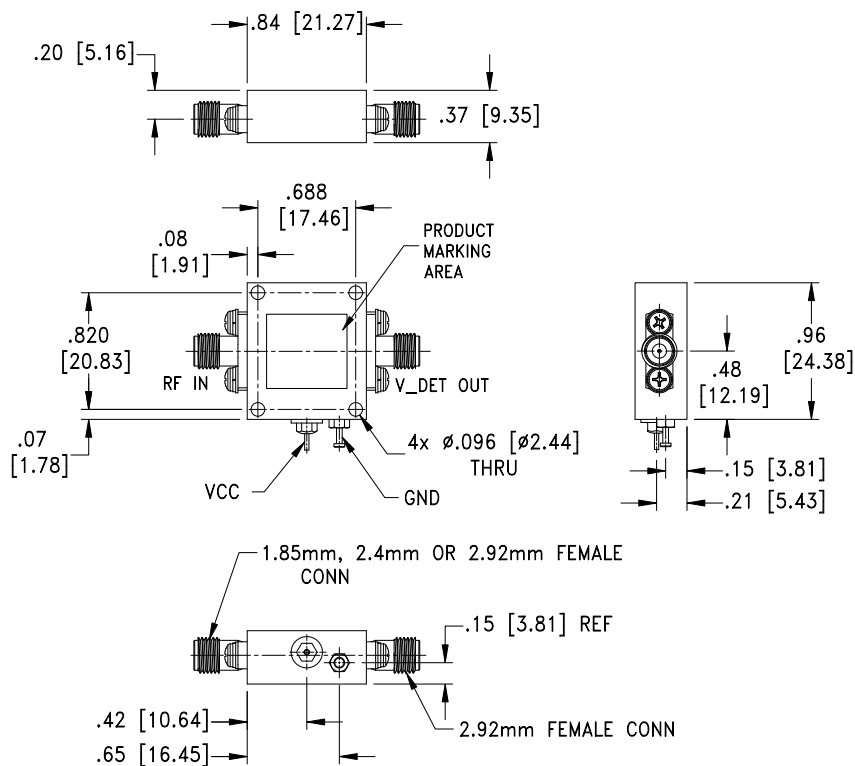

Weight: 45 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

PRODUCT MARKING*: ZV47-E673RMS+

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

COAXIAL

Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	AV2578-4
RoHs Status	Compliant
Environmental Ratings	ENV28T5



Power Detector

ZV47-E673RMS+

Typical Performance Data

OUTPUT VOLTAGE VS INPUT POWER @ +25°C											
POWER IN (dBm)	@0.1 GHz (V)	@0.5 GHz (V)	@1 GHz (V)	@5 GHz (V)	@10 GHz (V)	@20 GHz (V)	@30 GHz (V)	@40 GHz (V)	@50 GHz (V)	@60 GHz (V)	@67 GHz (V)
-35	0.09	0.17	0.14	0.14	0.13	0.09	0.08	0.09	0.11	0.11	0.08
-30	0.22	0.30	0.28	0.28	0.27	0.23	0.22	0.23	0.26	0.26	0.23
-25	0.37	0.45	0.42	0.42	0.41	0.38	0.38	0.38	0.40	0.40	0.37
-20	0.51	0.59	0.56	0.56	0.56	0.52	0.52	0.52	0.55	0.54	0.52
-15	0.65	0.72	0.70	0.70	0.69	0.66	0.65	0.66	0.68	0.68	0.65
-10	0.78	0.85	0.83	0.83	0.83	0.80	0.79	0.80	0.82	0.82	0.79
-5	0.92	0.97	0.96	0.97	0.96	0.93	0.92	0.93	0.95	0.95	0.92
0	1.06	1.14	1.13	1.13	1.13	1.09	1.08	1.09	1.11	1.08	1.04

OUTPUT VOLTAGE (V) VS FREQUENCY OVER TEMPERATURE									
FREQ (GHz)	@ INPUT POWER = -35 dBm			@ INPUT POWER = -20 dBm			@ INPUT POWER = 0 dBm		
	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C
0.1	0.10	0.09	0.08	0.50	0.51	0.51	1.05	1.06	1.06
0.5	0.18	0.17	0.16	0.58	0.59	0.58	1.15	1.14	1.13
1	0.15	0.14	0.13	0.55	0.56	0.56	1.13	1.13	1.12
4	0.15	0.14	0.13	0.56	0.57	0.56	1.14	1.14	1.13
7	0.14	0.13	0.12	0.55	0.56	0.56	1.13	1.13	1.12
10	0.13	0.13	0.12	0.55	0.56	0.55	1.13	1.13	1.12
13	0.14	0.13	0.12	0.56	0.57	0.57	1.13	1.13	1.12
16	0.13	0.12	0.11	0.55	0.56	0.55	1.13	1.12	1.11
19	0.12	0.11	0.10	0.54	0.55	0.54	1.10	1.11	1.10
22	0.11	0.10	0.09	0.53	0.54	0.53	1.09	1.10	1.10
25	0.09	0.08	0.07	0.51	0.52	0.52	1.07	1.09	1.08
28	0.09	0.08	0.07	0.52	0.52	0.52	1.07	1.08	1.08
31	0.08	0.08	0.06	0.51	0.52	0.52	1.06	1.08	1.08
34	0.07	0.06	0.05	0.50	0.51	0.51	1.04	1.07	1.07
37	0.08	0.07	0.06	0.50	0.51	0.51	1.05	1.07	1.08
40	0.09	0.09	0.08	0.51	0.52	0.52	1.07	1.09	1.09
43	0.09	0.08	0.08	0.52	0.53	0.53	1.06	1.09	1.09
46	0.09	0.09	0.08	0.51	0.52	0.53	1.07	1.09	1.09
49	0.11	0.11	0.10	0.54	0.54	0.55	1.10	1.11	1.09
52	0.11	0.11	0.10	0.54	0.55	0.55	1.10	1.10	1.08
55	0.12	0.12	0.10	0.54	0.55	0.55	1.11	1.10	1.08
58	0.12	0.11	0.09	0.55	0.55	0.53	1.10	1.09	1.06
61	0.13	0.11	0.08	0.55	0.55	0.53	1.09	1.08	1.05
64	0.12	0.10	0.05	0.53	0.52	0.49	1.08	1.06	1.03
67	0.11	0.08	0.03	0.53	0.52	0.48	1.05	1.04	1.01
70	0.08	0.04	0.00	0.51	0.49	0.44	1.02	1.01	0.97

Typical Performance Data

INPUT POWER DEVIATION FROM IDEAL VS INPUT POWER @ +25°C								
@ 1 GHz					@ 10 GHz			
Pin MEASURED	Vout, MEASURED (V)	Vout, IDEAL (V)	Pin, IDEAL (dBm)	DEVIATION FROM IDEAL (dB)	Vout, MEASURED (V)	Vout, IDEAL (V)	Pin, IDEAL (dBm)	DEVIATION FROM IDEAL (dB)
-35	0.14	0.14	-35.00	0.00	0.13	0.13	-34.97	0.03
-30	0.28	0.28	-29.97	0.03	0.27	0.27	-30.00	0.00
-25	0.42	0.42	-24.95	0.05	0.41	0.41	-25.04	-0.04
-20	0.56	0.56	-19.92	0.08	0.56	0.55	-19.72	0.28
-15	0.70	0.70	-14.90	0.10	0.69	0.69	-15.11	-0.11
-10	0.83	0.84	-10.23	-0.23	0.83	0.83	-10.14	-0.14
-5	0.96	0.98	-5.56	-0.56	0.96	0.97	-5.53	-0.53
0	1.13	1.12	0.54	0.54	1.13	1.12	0.50	0.50

INPUT POWER DEVIATION FROM IDEAL VS INPUT POWER @ +25°C								
@ 20 GHz					@ 30 GHz			
Pin MEASURED	Vout, MEASURED (V)	Vout, IDEAL (V)	Pin, IDEAL (dBm)	DEVIATION FROM IDEAL (dB)	Vout, MEASURED (V)	Vout, IDEAL (V)	Pin, IDEAL (dBm)	DEVIATION FROM IDEAL (dB)
-35	0.09	0.09	-35.06	-0.06	0.08	0.09	-35.21	-0.21
-30	0.23	0.23	-30.12	-0.12	0.22	0.23	-30.25	-0.25
-25	0.38	0.38	-24.82	0.18	0.38	0.37	-24.58	0.42
-20	0.52	0.52	-19.88	0.12	0.52	0.51	-19.62	0.38
-15	0.66	0.66	-14.94	0.06	0.65	0.65	-15.02	-0.02
-10	0.80	0.80	-10.00	0.00	0.79	0.79	-10.06	-0.06
-5	0.93	0.94	-5.41	-0.41	0.92	0.93	-5.46	-0.46
0	1.09	1.08	0.24	0.24	1.08	1.07	0.21	0.21

INPUT POWER DEVIATION FROM IDEAL VS INPUT POWER @ +25°C								
@ 40 GHz					@ 50 GHz			
Pin MEASURED	Vout, MEASURED (V)	Vout, IDEAL (V)	Pin, IDEAL (dBm)	DEVIATION FROM IDEAL (dB)	Vout, MEASURED (V)	Vout, IDEAL (V)	Pin, IDEAL (dBm)	DEVIATION FROM IDEAL (dB)
-35	0.09	0.09	-35.06	-0.06	0.11	0.12	-35.24	-0.24
-30	0.23	0.23	-30.12	-0.12	0.26	0.26	-29.92	0.08
-25	0.38	0.38	-24.82	0.18	0.40	0.40	-24.95	0.05
-20	0.52	0.52	-19.88	0.12	0.55	0.54	-19.63	0.37
-15	0.66	0.66	-14.94	0.06	0.68	0.68	-15.02	-0.02
-10	0.80	0.80	-10.00	0.00	0.82	0.82	-10.05	-0.05
-5	0.93	0.94	-5.41	-0.41	0.95	0.96	-5.44	-0.44
0	1.09	1.08	0.24	0.24	1.11	1.10	0.24	0.24

INPUT POWER DEVIATION FROM IDEAL VS INPUT POWER @ +25°C								
@ 60 GHz					@ 67 GHz			
Pin MEASURED	Vout, MEASURED (V)	Vout, IDEAL (V)	Pin, IDEAL (dBm)	DEVIATION FROM IDEAL (dB)	Vout, MEASURED (V)	Vout, IDEAL (V)	Pin, IDEAL (dBm)	DEVIATION FROM IDEAL (dB)
-35	0.11	0.12	-35.36	-0.36	0.08	0.09	-35.48	-0.48
-30	0.26	0.26	-29.95	0.05	0.23	0.23	-30.03	-0.03
-25	0.40	0.40	-24.90	0.10	0.37	0.37	-24.95	0.05
-20	0.54	0.54	-19.85	0.15	0.52	0.51	-19.50	0.50
-15	0.68	0.67	-14.79	0.21	0.65	0.64	-14.78	0.22
-10	0.82	0.81	-9.74	0.26	0.79	0.78	-9.69	0.31
-5	0.95	0.95	-5.05	-0.05	0.92	0.92	-4.97	0.03
0	1.08	1.09	-0.36	-0.36	1.04	1.06	-0.61	-0.61

Power Detector

ZV47-E673RMS+

Typical Performance Data

Pin (dBm)	SLOPE (mV/dB) VS INPUT POWER OVER TEMPERATURE								
	RANGE @ FREQUENCY 0.1 GHz			RANGE @ FREQUENCY 30 GHz			RANGE @ FREQUENCY 67 GHz		
	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C
-30	26.56	27.26	28.28	28.97	29.94	30.83	28.43	29.48	30.63
-25	27.66	28.54	29.12	28.59	29.42	30.04	28.01	28.97	29.67
-20	27.26	28.12	28.67	26.79	27.59	28.13	27.30	28.14	28.92
-15	26.57	27.27	27.72	26.35	27.03	27.46	26.82	27.47	28.02
-10	26.55	26.89	27.09	26.64	27.14	27.40	26.46	26.88	26.96
-5	28.20	28.12	27.26	28.16	28.77	28.61	25.71	25.32	24.71

FREQUENCY (GHz)	SLOPE (mV/dB) VS FREQUENCY OVER TEMPERATURE								
	@ INPUT POWER = -30 dBm			@ INPUT POWER = -20 dBm			@ INPUT POWER = -5 dBm		
	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C	-40°C	+25°C	+85°C
0.1	26.56	27.26	28.28	27.26	28.12	28.67	28.20	28.12	27.26
0.5	26.69	27.38	28.17	26.19	27.11	27.72	32.01	29.16	27.60
1	26.99	27.72	28.51	26.71	27.60	28.18	31.87	29.84	28.44
4	27.25	28.06	28.79	26.90	27.77	28.32	32.40	30.21	28.77
7	27.84	28.67	29.41	26.62	27.46	28.01	31.53	29.97	28.66
10	27.82	28.69	29.41	27.09	27.93	28.53	31.63	30.01	28.67
13	28.57	29.47	30.22	26.18	26.98	27.51	31.49	29.85	28.53
16	28.66	29.57	30.32	26.87	27.70	28.26	31.21	29.72	28.51
19	28.47	29.40	30.15	26.89	27.69	28.25	30.08	29.42	28.50
22	28.58	29.51	30.30	27.08	27.87	28.42	29.54	29.30	28.58
25	28.82	29.79	30.65	26.86	27.67	28.23	29.26	29.54	29.13
28	28.56	29.50	30.38	27.12	27.91	28.44	28.47	28.86	28.57
31	29.09	30.07	30.98	26.48	27.24	27.76	28.27	28.90	28.71
34	28.89	29.89	30.80	27.08	27.86	28.40	27.84	28.61	28.58
37	28.55	29.50	30.43	27.43	28.21	28.75	28.03	28.86	28.78
40	28.18	29.08	29.90	27.57	28.33	28.87	28.76	29.32	28.64
43	28.93	29.94	30.69	26.84	27.63	28.11	28.42	29.14	28.41
46	28.05	29.03	29.74	27.56	28.37	28.87	28.38	29.08	28.00
49	28.34	29.33	29.97	27.22	27.99	28.49	30.08	29.03	26.86
52	28.69	29.67	30.36	26.88	27.64	28.13	29.53	28.42	26.21
55	28.13	29.10	29.75	27.35	28.11	28.64	29.64	27.64	25.15
58	28.55	29.55	30.30	26.92	27.68	28.27	28.74	27.00	24.98
61	28.54	29.54	30.33	26.80	27.55	28.18	27.60	25.90	24.18
64	27.40	28.41	29.32	28.06	28.91	29.70	26.65	25.64	24.59
67	28.43	29.48	30.63	27.30	28.14	28.92	25.71	25.32	24.71
70	28.56	29.72	28.91	27.08	27.96	28.79	24.59	24.83	24.76

Typical Performance Data



OUTPUT VOLTAGE DEVIATION (mV) VS INPUT POWER AT FREQUENCY = 0.1 GHz			
POWER IN (dBm)	TEMP = +25C	OUTPUT VOLTAGE DEVIATION @-40°C RELATIVE TO +25°C	OUTPUT VOLTAGE DEVIATION @+85°C RELATIVE TO +25°C
-35	0	3.19	-15.19
-30	0	0.67	-7.77
-25	0	-3.83	-5.01
-20	0	-8.20	-1.98
-15	0	-12.38	0.49
-10	0	-15.18	2.59
-5	0	-15.69	2.58
0	0	-14.35	-5.98

OUTPUT VOLTAGE DEVIATION (mV) VS INPUT POWER AT FREQUENCY = 30 GHz			
POWER IN (dBm)	Temp = +25C	OUTPUT VOLTAGE DEVIATION @-40°C RELATIVE TO +25°C	OUTPUT VOLTAGE DEVIATION @+85°C RELATIVE TO +25°C
-35	0	6.47	-12.33
-30	0	1.05	-6.58
-25	0	-3.26	-3.44
-20	0	-7.26	-0.35
-15	0	-11.28	1.93
-10	0	-14.08	3.93
-5	0	-16.25	4.63
0	0	-20.23	2.25

OUTPUT VOLTAGE DEVIATION (mV) VS INPUT POWER AT FREQUENCY = 67 GHz			
POWER IN (dBm)	Temp = +25C	OUTPUT VOLTAGE DEVIATION @-40°C RELATIVE TO +25°C	OUTPUT VOLTAGE DEVIATION @+85°C RELATIVE TO +25°C
-35	0	28.38	-52.28
-30	0	22.85	-43.80
-25	0	17.88	-40.76
-20	0	13.27	-36.73
-15	0	9.43	-33.02
-10	0	6.81	-31.27
-5	0	5.18	-32.19
0	0	10.77	-37.36





RL vs. FREQUENCY OVER TEMPERATURE			
FREQ	-40°C	+25°C	+85°C
(GHz)	(dB)	(dB)	(dB)
0.1	-28.94	-28.52	-28.48
0.5	-29.24	-28.80	-28.78
1	-28.28	-27.85	-27.72
4	-17.38	-17.13	-16.81
7	-12.26	-12.12	-11.92
10	-9.71	-9.74	-9.67
13	-12.63	-12.72	-12.66
16	-9.60	-9.52	-9.37
19	-7.40	-7.50	-7.48
22	-8.04	-8.23	-8.27
25	-8.64	-8.71	-8.64
28	-9.03	-9.14	-9.19
31	-9.56	-9.92	-10.08
34	-7.77	-8.01	-8.05
37	-9.46	-9.63	-9.76
40	-18.54	-20.04	-21.57
43	-10.28	-10.45	-10.52
46	-9.61	-10.14	-10.60
49	-53.56	-30.98	-24.91
52	-11.67	-11.80	-12.10
55	-17.09	-19.68	-24.62
58	-13.93	-13.76	-13.48
61	-13.89	-14.80	-15.54
64	-27.44	-21.96	-18.30
67	-16.05	-18.28	-20.43
70	-8.75	-8.53	-8.09

Typical Performance Curves



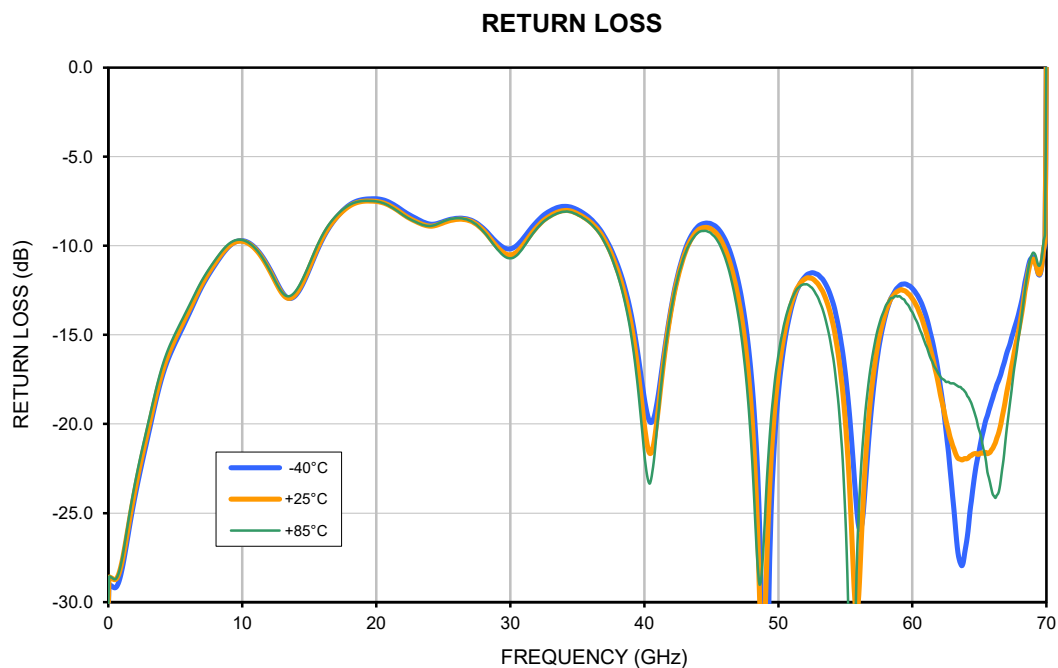
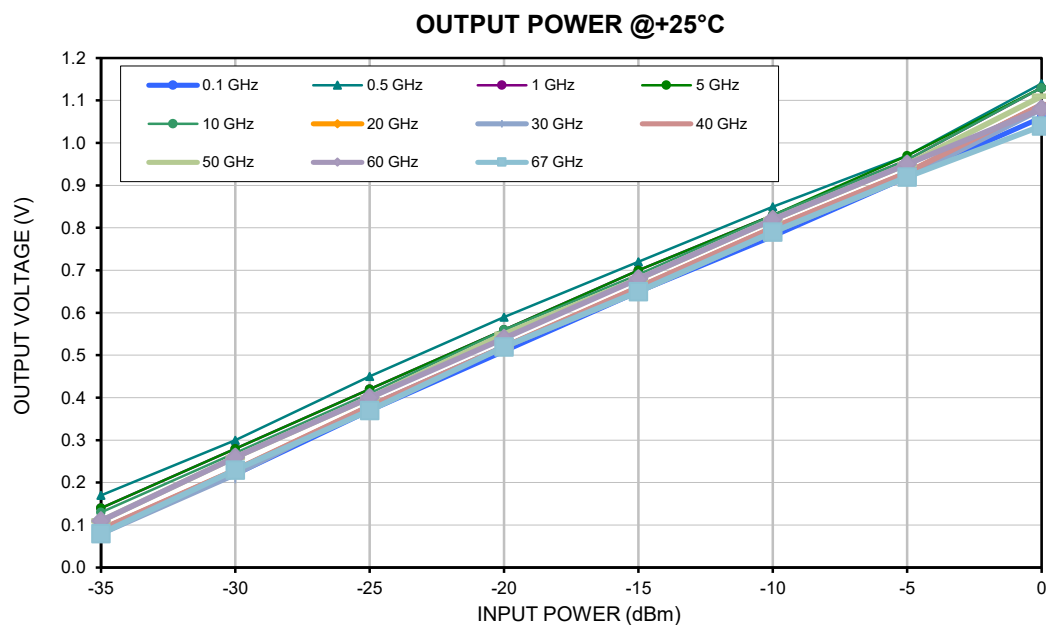


Typical Performance Curves

The following charts show measured output voltage as a function of input power at a fixed frequency (green), plotted alongside an ideal linear voltage curve (orange) for comparison. Also shown is the difference of measured and ideal voltage represented as an error in input power (blue).

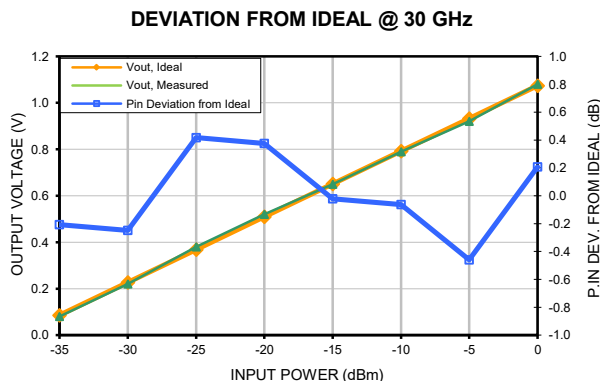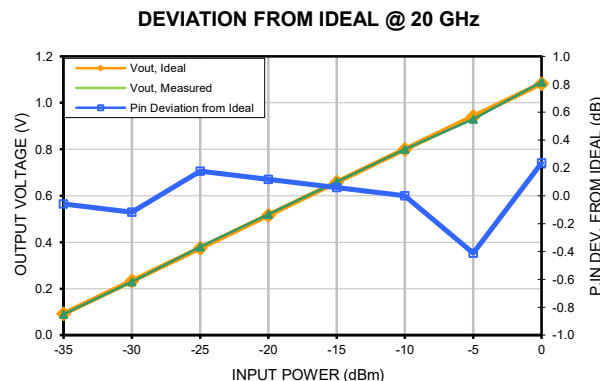
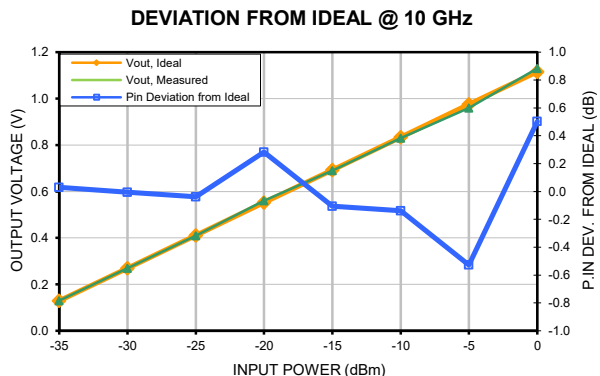
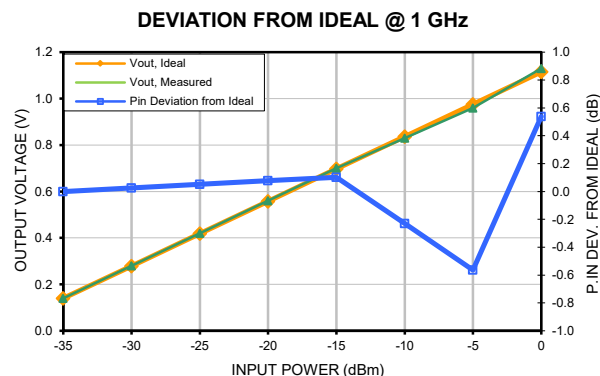


Typical Performance Curves

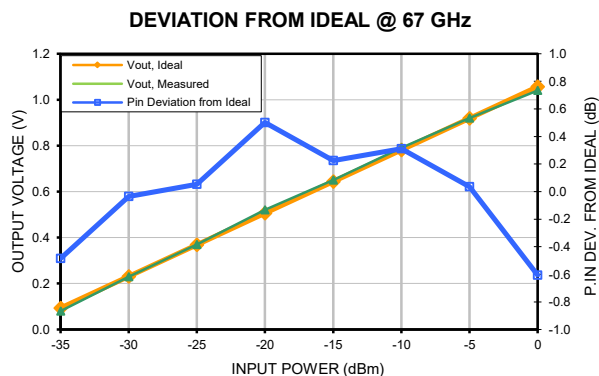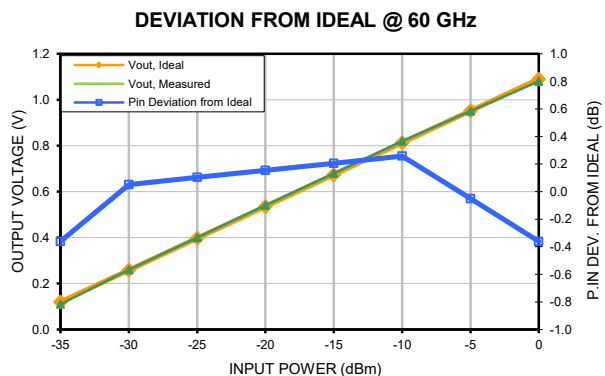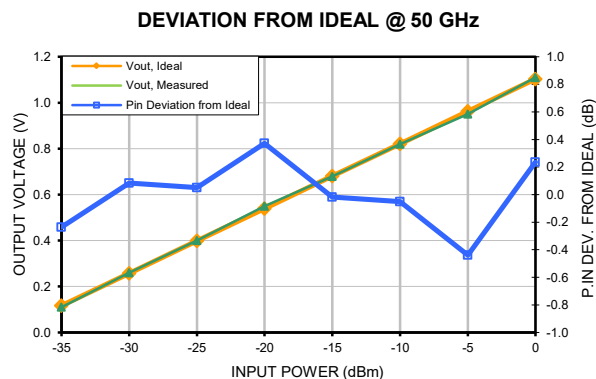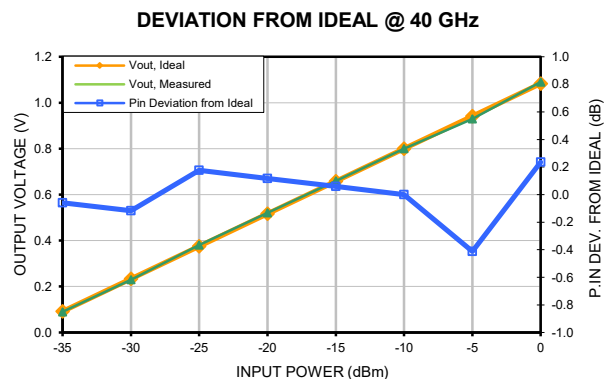




Typical Performance Curves

The following charts show measured output voltage at various temperatures as a function of frequency at a fixed input power.

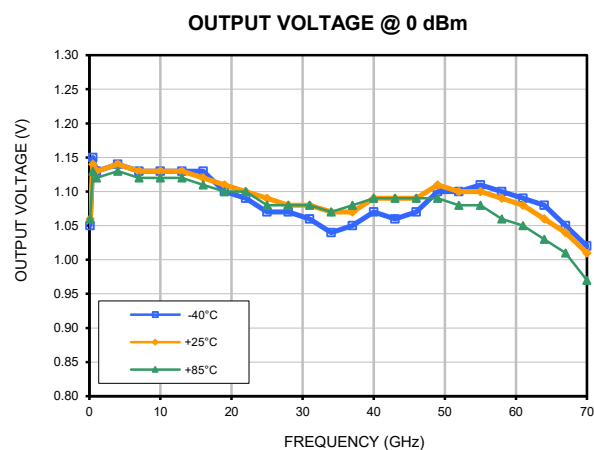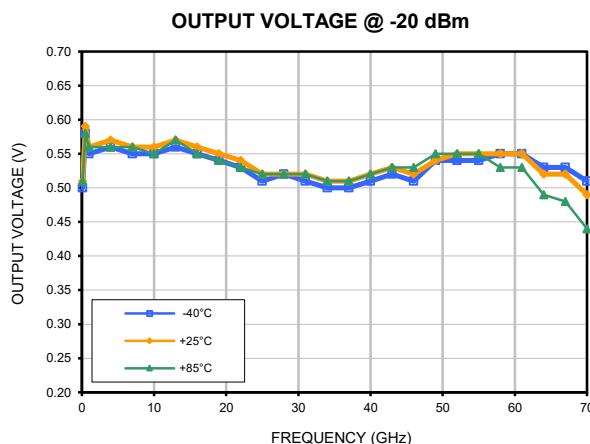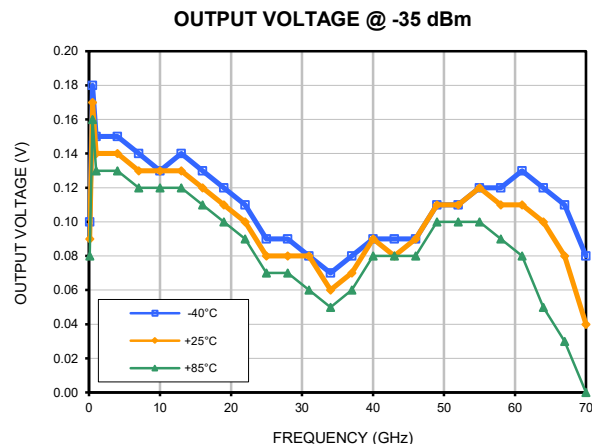




Typical Performance Curves

The following charts show output voltage slope at various temperatures as a function of input power at a fixed frequency. The output voltage slope at a given input power is obtained by using linear regression over the range from -35 dBm to 0 dBm.

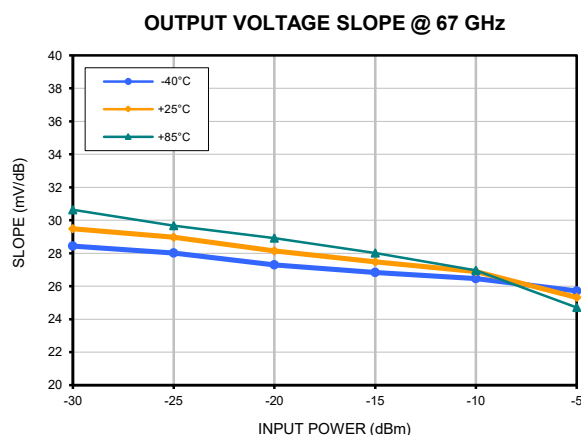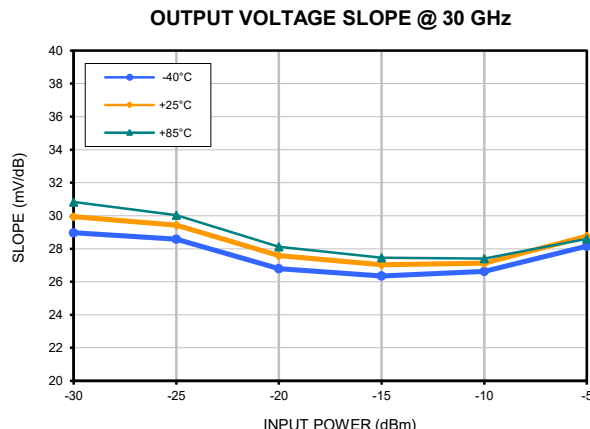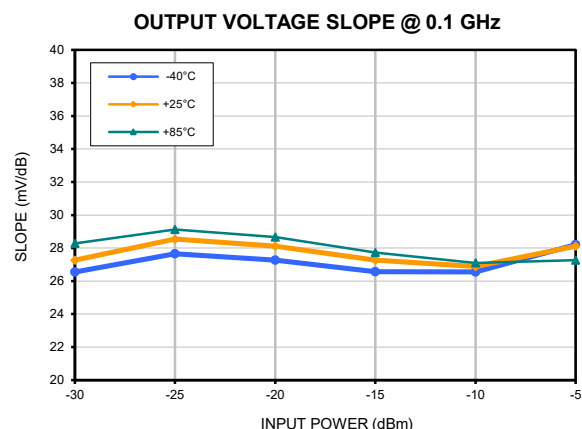

Typical Performance Curves


The following charts show output voltage slope at various temperatures as a function of frequency at a fixed input power. The output voltage slope at a given input power is obtained by using linear regression over the range from -35 dBm to 0 dBm.

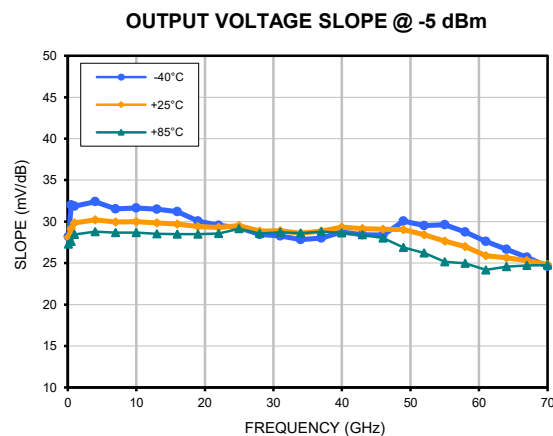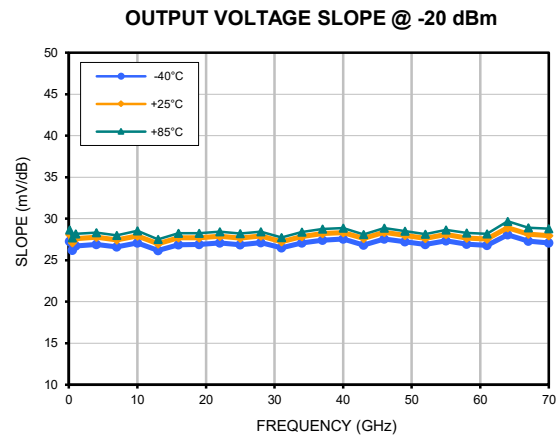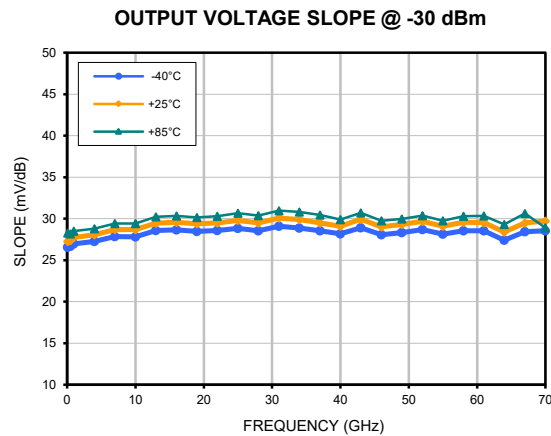


Typical Performance Curves

The following charts show measured output voltage deviation at -40°C relative to +25°C (blue) and measured output voltage deviation at +85°C relative to +25°C (orange). Also shown is the measured output voltage measured at +25°C normalized (green) for comparison.


OUTPUT VOLTAGE DEVIATION @ 0.1 GHz

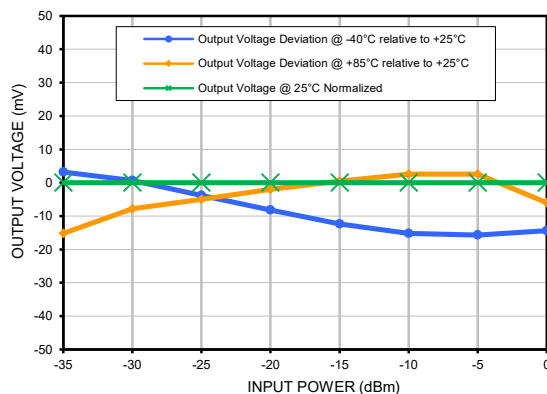

OUTPUT VOLTAGE DEVIATION @ 30 GHz

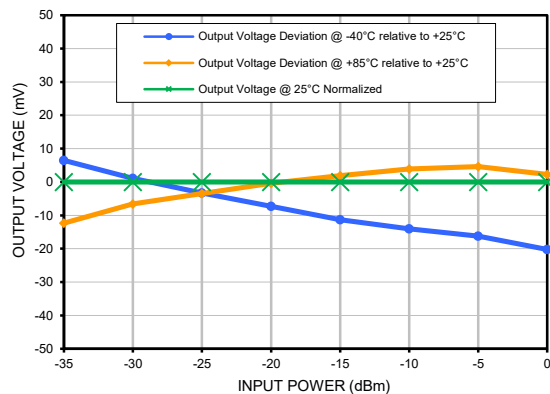


OUTPUT VOLTAGE DEVIATION @ 67 GHz

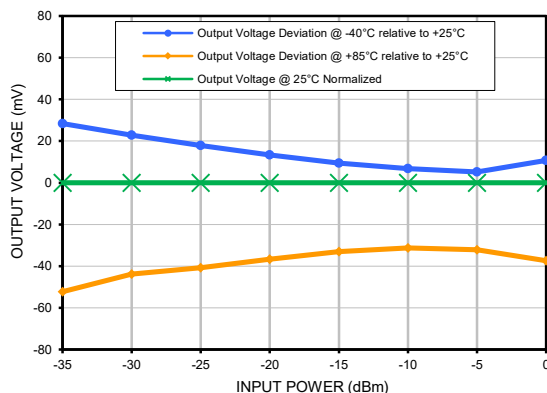

Outline Dimensions

AV2578-4

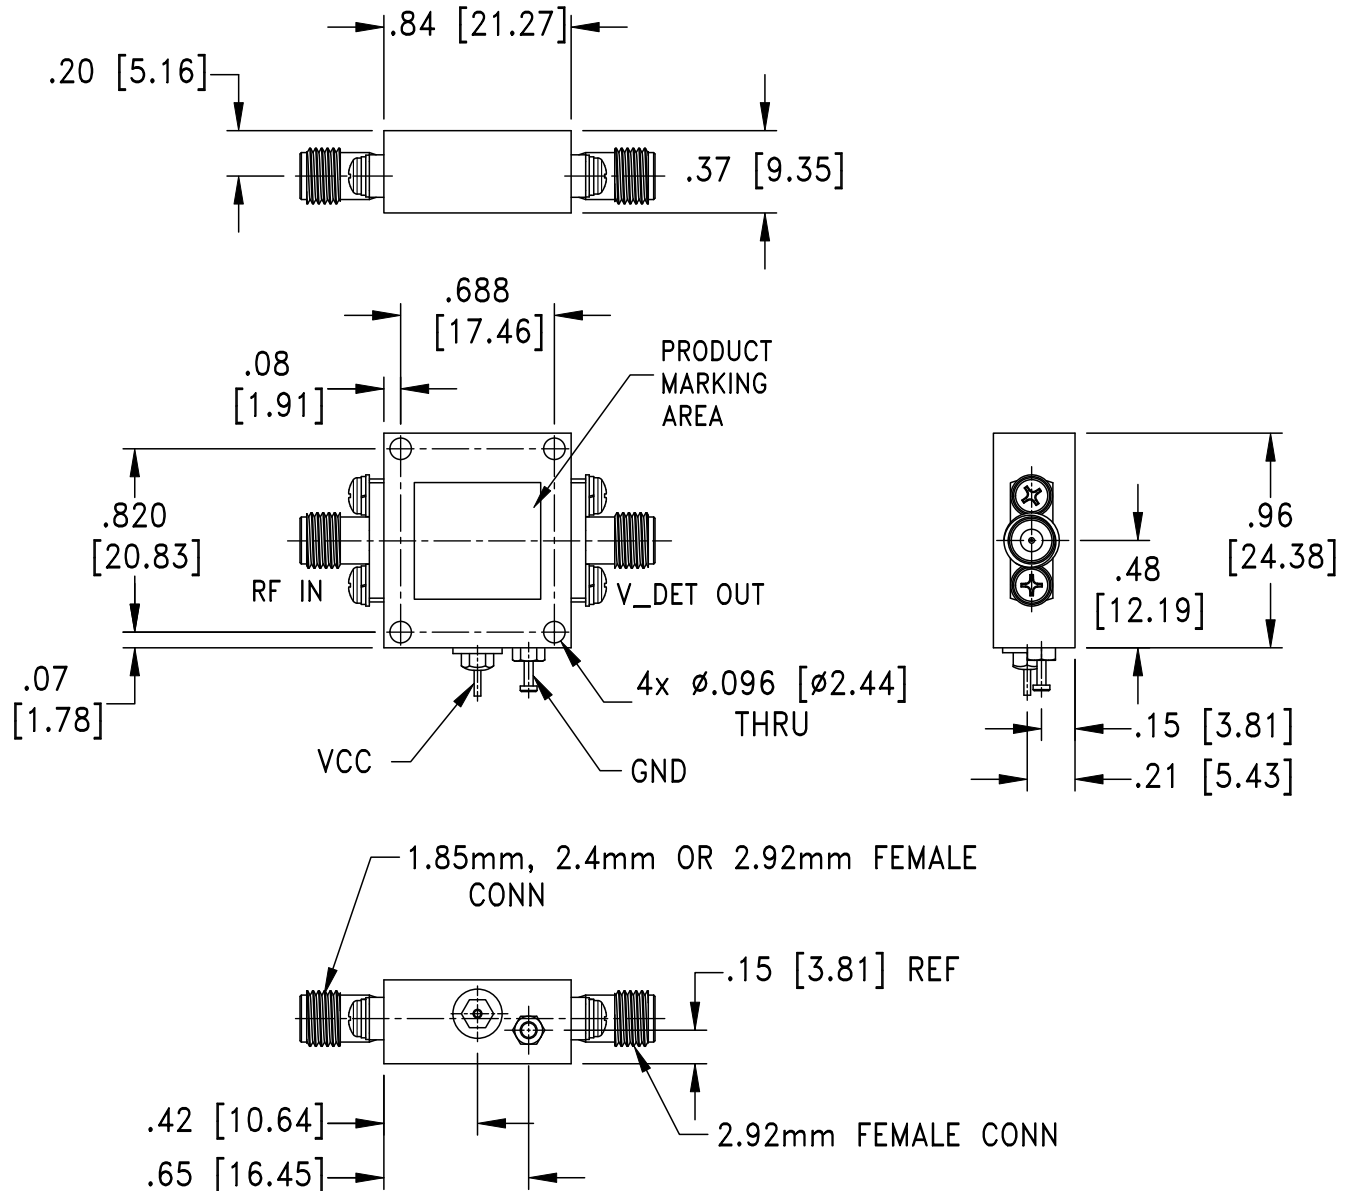

Weight: 45 grams

Dimensions are in inches (mm). Tolerances: 2 Pl. ± 0.03 ; 3 Pl. ± 0.015

Notes:

1. Case material: Brass alloy
2. Case finish: Gold plating 20 μ inches, over Nickel plating 100 μ inches.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I