
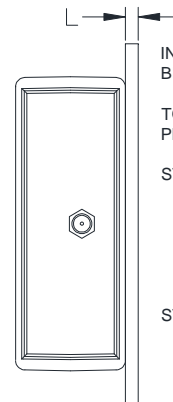
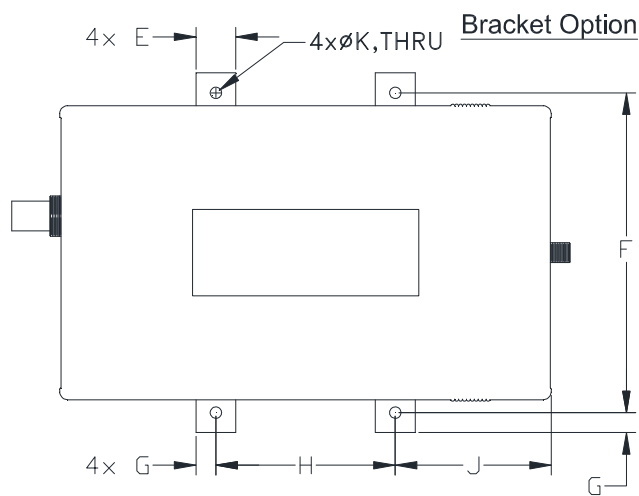
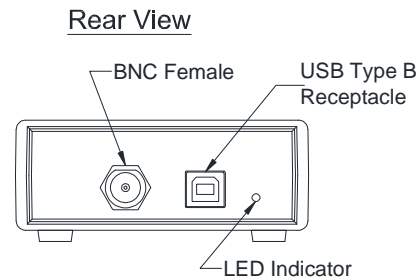
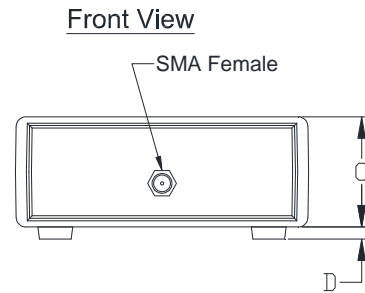


# Case Style

# LJ

## Outline Dimensions

## LJ1577

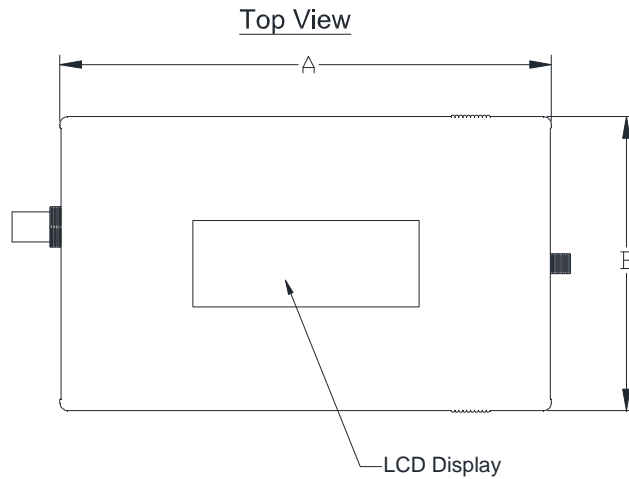

INSTRUCTION FOR MOUNTING BRACKET.

TOOL REQUIRED:  
PHILIPS HEAD SCREW DRIVER

STEP 1: REMOVE 6 FASTENERS FROM THE BOTTOM OF THE UNIT.

DO NOT DISCARD THE FASTENERS.

STEP 2: MOUNT THE BRACKET WITH THE FASTENERS REMOVED IN STEP 1, USING THE COUNTER BORE HOLES IN BRACKET.

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT. GRAMS
LJ1577	6.16 (156.5)	3.68 (93.4)	1.38 (35.0)	.15 (3.8)	.500 (12.7)	4.000 (101.6)	.250 (6.4)	2.250 (57.2)	1.96 (49.7)	.144 (3.7)	.160 (4.1)	300

Dimensions are in inches (mm). Tolerances: 2PL. +/- .03; 3PL. +/- .015

### Notes:

1. Case material: Plastic.

**Mini-Circuits®**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified